

SAN FRANCISCO PLANNING DEPARTMENT

Executive Summary Conditional Use

HEARING DATE: JANUARY 16, 2014

1650 Mission St. Suite 400 San Francisco, CA 94103-2479

Reception:

415.558.6378

Fax:

415.558.6409

Planning Information: 415.558.6377

Date: January 9, 2013
Case No.: **2013.1329C**

Project Address: 1320 SUTTER STREET

Zoning: RC-4 (Neighborhood Commercial, Cluster)

130-V Height and Bulk District

Block/Lot: 0671/002

Project Sponsor: David Cincotta

Jeffer Mangels Butler & Mitchell LLP 2 Embarcadero Center, 5th Floor

San Francisco, CA 94111

Staff Contact: Sharon Lai – (415) 575-9087

sharon.w.lai@sfgov.org

Recommendation: Approval with Conditions

PROJECT DESCRIPTION

The applicant proposes to establish a new formula retail use in the approximately 8,000 square foot vacant commercial space. The subject use will be a furniture store (d.b.a. CORT), specializing in the sales of used merchandise from CORT's furniture rental enterprise. The proposed formula retail use will contain approximately 6,000 square feet of retail sales floor area.

The proposed hours of operation are Monday through Friday from 10 AM to 7 PM, Saturday from 11 AM to 6 PM, and Sunday from 12 PM to 5 PM. The operation intends to employ four part-time and full-time employees. The subject formula retailer has 91 retail locations and 47 warehouse locations nationwide. There is currently one San Francisco CORT furniture rental location at 447 Battery Street (2.2 miles away). The proposed site will be one of five CORT locations dedicated for furniture sales. There are 42 parking spaces in the second floor garage that is shared with the other commercial tenant in the building (BevMo! – 1301 and 1305 Van Ness Avenue).

SITE DESCRIPTION AND PRESENT USE

The project is located on a steeply sloping peninsular lot that occupies the width of the block, on the west side of Van Ness Avenue, between Fern and Sutter Streets, Block 0671, Lot 002. The property is located within the RC-4 (Residential-Commercial Combined, High Density) District and the 130-V Height and Bulk District and the Van Ness SUD (Special Use District). The property is developed with a two-story commercial building, containing ground floor commercial tenant spaces (1301 and 1305 Van Ness Avenue and 1320 Sutter Street) and a second floor parking garage. The tenant space fronting along Van Ness Avenue (1301 and 1305 Van Ness Avenue) is currently occupied by a formula retail liquor store (d.b.a. BevMo!) and the subject tenant space at 1320 Sutter Street is approximately half a story higher in

Executive Summary Hearing Date: January 16, 2014

elevation than the Van Ness Avenue frontage, and has been vacant since 2011. The last known use at 1320 Sutter Street was an antique retail store (d.b.a. Tenenbaum Emporium), which also occupied the commercial space at 1305 Van Ness Avenue. The existing building was constructed circa 1912 and is a known historic resource.

SURROUNDING PROPERTIES AND NEIGHBORHOOD

The project site is located within the former Western Addition A-2 Redevelopment Area, which expired in 2009. It is on the eastern fringe of the Western Addition neighborhood and is adjacent to the Downtown/Civic Center as well as the Lower Nob Hill and Pacific Heights neighborhoods to the east. The subject property is also located in the Van Ness Special Use District and is part of the Van Ness Area Plan, which is predominantly a RC-4 and RC-3 zoning district. The corridor contains a number of architecturally and historically significant and contributory buildings. Van Ness Avenue is also known as the U.S. Highway 101, which is a wide vehicular arterial that consists of a variety of residential, commercial, and mixed-use buildings featuring residential uses above ground-floor commercial establishments. Generally, the commercial establishments characterizing this portion of Van Ness Avenue include a mixture of retail stores, office buildings, restaurants, and automobile dealership/repair shops.

Nearby land uses include residential, office, retail, restaurant and bar, auto service, church, hotel, and parking. The other lots on the subject block are zoned NC-3 (Neighborhood Commercial, Moderate-Scale) and contain multi-unit residential buildings with small ground floor retail uses. The lot to the south across from the subject tenant space, across Sutter Street, is a two-story mixed-use building with ground floor retail and residential units on the second floor. There is a four-story entertainment building (d.b.a. The Regency Ballroom) located immediately east of the site, across Van Ness Avenue. Other buildings on the east side of Van Ness Avenue range from one to five stories in height, and are occupied by residential and retail uses. The CPMC Cathedral Hill site is located three blocks south of the subject site.

ENVIRONMENTAL REVIEW

The Project is exempt from the California Environmental Quality Act ("CEQA") as a Class 1 categorical exemption.

HEARING NOTIFICATION

ТҮРЕ	REQUIRED PERIOD	REQUIRED NOTICE DATE	ACTUAL NOTICE DATE	ACTUAL PERIOD
Classified News Ad	20 days	December 27, 2013	December 27, 2013	20 days
Posted Notice	20 days	December 27, 2013	December 27, 2013	20 days
Mailed Notice	20 days	December 27, 2013	December 27, 2013	20 days

PUBLIC COMMENT

The Department has not received any public comment to date.

CASE NO. 2013.1329C 1320 Sutter Street

Executive Summary Hearing Date: January 16, 2014

ISSUES AND OTHER CONSIDERATIONS

- There are approximately 44 existing formula retail establishments, including the subject property, out of approximately 232 commercial establishments within the RC-4 zoning district of the Van Ness Avenue SUD, which is approximately 19%.
- There are eight existing formula retail establishments (including recently approved), within the immediate two block radius.
- The nearest establishment selling used furniture is approximately two blocks north of the subject site.
- The character of Van Ness Avenue historically supported larger commercial uses.
- There are seven existing vacancies within the immediate two block radius and the project will replace one of them.
- The proposed establishment is a formula retail use with approximately 138 facilities (warehouse, rental and sales) nationwide, including one existing location in San Francisco.

REQUIRED COMMISSION ACTION

In order for the project to proceed, the Commission must grant conditional use authorization to allow the establishment of a new formula retail use within the RC-4, pursuant to Planning Code Sections 303, 703.3, and 703.4.

BASIS FOR RECOMMENDATION

- Although the formula retailer has 138 facilities nationwide, including one 2 miles from the subject site, the proposed location is one of only five CORT locations in the nation to sell furniture.
- The project will replace a vacant storefront with a furniture store, which is a use that previously occupied the subject site.
- The project will increase the availability of affordable specialty goods that are complementary to the neighborhood.
- The project will not affect the existing character of the corridor as the majority of modifications are limited to the interior.
- Van Ness Avenue and the Van Ness Special Use district is not a neighborhood commercial district. The state highway 101 is a vehicular thoroughfare and attracts destination uses such as the proposed furniture establishment.
- The project meets all applicable requirements of the Planning Code.
- The project is desirable for, and compatible with the surrounding neighborhood.

RECOMMENDATION: Approval with Conditions

Attachments:

Block Book Map Sanborn Map Zoning Map Formula Retail Map Aerial Photographs Executive Summary CASE NO. 2013.1329C Hearing Date: January 16, 2014 1320 Sutter Street

Site Photo Reduced Plans Formula Retail Checklist

Executive Summary Hearing Date: January 16, 2014

Attachment Checklist

Executive Summary		Project sponsor submittal
Draft Motion		Drawings: Existing Conditions
Environmental Determination		Check for legibility
Zoning District Map		Drawings: <u>Proposed Project</u>
Height & Bulk Map		Check for legibility
Parcel Map		3-D Renderings (new construction or significant addition)
Sanborn Map		Check for legibility
Formula Retail Map		Wireless Telecommunications Materials
Context Photos		Health Dept. review of RF levels
Site Photos		RF Report
		Community Meeting Notice
		Housing Documents
		Inclusionary Affordable Housing Program: Affidavit for Compliance
		Residential Pipeline
Exhibits above marked with an "X" are inc	clude	d in this packet SL
		Planner's Initials

SL: G:\DOCUMENTS\CU\1301 Van Ness Ave\2013.0530C\1301 Van Ness St - Executive Summary.doc

Executive Summary Hearing Date: January 16, 2014

Attachment Checklist

Executive Summary		Project sponsor submittal
Draft Motion		Drawings: Existing Conditions
Environmental Determination		Check for legibility
Zoning District Map		Drawings: <u>Proposed Project</u>
Height & Bulk Map		Check for legibility
Parcel Map		3-D Renderings (new construction or significant addition)
Sanborn Map		Check for legibility
Formula Retail Map		Wireless Telecommunications Materials
Context Photos		Health Dept. review of RF levels
Site Photos		RF Report
		Community Meeting Notice
		Housing Documents
		Inclusionary Affordable Housing Program: Affidavit for Compliance
		Residential Pipeline
Exhibits above marked with an "X" are inc	clude	d in this packet SL
		Planner's Initials

SL: G:\DOCUMENTS\CU\1301 Van Ness Ave\2013.0530C\1301 Van Ness St - Executive Summary.doc



SAN FRANCISCO PLANNING DEPARTMENT

Subject to: (Select only if applicable)	
☐ Affordable Housing (Sec. 415)	☐ First Source Hiring (Admin. Code)
☐ Jobs Housing Linkage Program (Sec. 413)	☐ Child Care Requirement (Sec. 414)
□ Downtown Park Fee (Sec. 412)	☐ Other

1650 Mission St. Suite 400 San Francisco, CA 94103-2479

Reception: 415.558.6378

Fax:

415.558.6409

Planning Information: 415.558.6377

Planning Commission Draft Motion

HEARING DATE: JANUARY 16, 2014

Date: January 9, 2014
Case No.: **2013.1329C**

Project Address: 1320 SUTTER STREET

Zoning: RC-4 (Neighborhood Commercial, Cluster)

130-V Height and Bulk District

Block/Lot: 0671/002

Project Sponsor: David Cincotta

Jeffer Mangels Butler & Mitchell LLP 2 Embarcadero Center, 5th Floor

San Francisco, CA 94111

Staff Contact: Sharon Lai – (415) 575-9087

sharon.w.lai@sfgov.org

ADOPTING FINDINGS RELATING TO THE APPROVAL OF CONDITIONAL USE AUTHORIZATION PURSUANT TO SECTIONS 303, 703.3 and 703.4 OF THE PLANNING CODE TO ESTABLISH A NEW FORMULA RETAIL USE (D.B.A. CORT) WITHIN THE RC-4 (RESIDENTIAL-COMMERCIAL COMBINED, HIGH DENSITY) DISTRICT, THE 130-V HEIGHT AND BULK DISTRICT, AND VAN NESS SPECIAL USE DISTRICT..

PREAMBLE

On SEPTEMBER 17, 2013, David Cincotta (hereinafter "Project Sponsor") filed an application with the Planning Department (hereinafter "Department") for Conditional Use Authorization under Planning Code Sections 303, 703.3 and 703.4 to allow the establishment of a new formula retail use (d.b.a. CORT) within the RC-4 (Residential-Commercial Combined, High Density) District and a 130-V Height and Bulk District.

On January 16, 2014, the San Francisco Planning Commission (hereinafter "Commission") conducted a duly noticed public hearing at a regularly scheduled meeting on Conditional Use Application No. 2013.1329C.

The Project is exempt from the California Environmental Quality Act ("CEQA") as a Class 1 categorical exemption.

The Commission has heard and considered the testimony presented to it at the public hearing and has further considered written materials and oral testimony presented on behalf of the applicant, Department staff, and other interested parties.

MOVED, that the Commission hereby authorizes the Conditional Use requested in Application No. 2013.1329C, subject to the conditions contained in "EXHIBIT A" of this motion, based on the following findings:

FINDINGS

Having reviewed the materials identified in the preamble above, and having heard all testimony and arguments, this Commission finds, concludes, and determines as follows:

- 1. The above recitals are accurate and constitute findings of this Commission.
- 2. Site Description and Present Use. The project is located on a steeply sloping peninsular lot that occupies the width of the block, on the west side of Van Ness Avenue, between Fern and Sutter Streets, Block 0671, Lot 002. The property is located within the RC-4 (Residential-Commercial Combined, High Density) District and the 130-V Height and Bulk District and the Van Ness SUD (Special Use District). The property is developed with a two-story commercial building, containing ground floor commercial tenant spaces (1301 and 1305 Van Ness Avenue and 1320 Sutter Street) and a second floor parking garage. The tenant space fronting along Van Ness Avenue (1301 and 1305 Van Ness Avenue) is currently occupied by a formula retail liquor store (d.b.a. BevMo!) and the subject tenant space at 1320 Sutter Street is approximately half a story higher in elevation than the Van Ness Avenue frontage, and has been vacant since 2011. The last known use at 1320 Sutter Street was an antique retail store (d.b.a. Tenenbaum Emporium), which also occupied the commercial space at 1305 Van Ness Avenue. The existing building was constructed circa 1912 and is a known historic resource.
- 3. Surrounding Properties and Neighborhood. The project site is located within the former Western Addition A-2 Redevelopment Area, which expired in 2009. It is on the eastern fringe of the Western Addition neighborhood and is adjacent to the Downtown/Civic Center as well as the Lower Nob Hill and Pacific Heights neighborhoods to the east. The subject property is also located in the Van Ness Special Use District and is part of the Van Ness Area Plan, which is predominantly a RC-4 and RC-3 zoning district. The corridor contains a number of architecturally and historically significant and contributory buildings. Van Ness Avenue is also known as the U.S. Highway 101, which is a wide vehicular arterial that consists of a variety of residential, commercial, and mixed-use buildings featuring residential uses above ground-floor commercial establishments. Generally, the commercial establishments characterizing this portion of Van Ness Avenue include a mixture of retail stores, office buildings, restaurants, and automobile dealership/repair shops.

Nearby land uses include residential, office, retail, restaurant and bar, auto service, church, hotel, and parking. The other lots on the subject block are zoned NC-3 (Neighborhood Commercial, Moderate-Scale) and contain multi-unit residential buildings with small ground floor retail uses. The lot to the south across from the subject tenant space, across Sutter Street, is a two-story mixed-use building with ground floor retail and residential units on the second floor. There is a four-story entertainment building (d.b.a. The Regency Ballroom) located immediately east of the site, across Van Ness Avenue. Other buildings on the east side of Van Ness Avenue range from one to five stories in height, and are occupied by residential and retail uses. The CPMC Cathedral Hill site is located three blocks south of the subject site.

4. **Project Description.** The applicant proposes to establish a new formula retail use in the approximately 8,000 square foot vacant commercial space. The subject use will be a furniture store (d.b.a. CORT), specializing in the sales of used merchandise from CORT's furniture rental enterprise. The proposed formula retail use will contain approximately 6,000 square feet of retail sales floor area.

The proposed hours of operation are Monday through Friday from 10 AM to 7 PM, Saturday from 11 AM to 6 PM, and Sunday from 12 PM to 5 PM. The operation intends to employ four part-time and full-time employees. The subject formula retailer has 91 retail locations and 47 warehouse locations nationwide. There is currently one San Francisco CORT furniture rental location at 447 Battery Street (2.2 miles away). The proposed site will be one of five CORT locations dedicated for furniture sales. There are 42 parking spaces in the second floor garage that is shared with the other commercial tenant in the building (BevMo! – 1301 and 1305 Van Ness Avenue).

- 5. **Public Comment**. The Department has not received any comments to date.
- 6. **Planning Code Compliance:** The Commission finds that the Project is consistent with the relevant provisions of the Planning Code in the following manner:
 - A. **Street Frontage in Residential-Commercial Districts.** Section 145.1 of the Planning Code requires the following:
 - 1. Off-street parking at street grade on a development lot must be set back at least 25 feet on the ground floor and at least 15 feet on floors above, from any facade facing a street at least 30 feet in width. Parking above the ground level shall be entirely screened from all public rights-of-way in a manner that accentuates ground floor uses, minimizes mechanical features and is in keeping with the overall massing and architectural vocabulary of the building.
 - 2. No more than one-third of the width or 20 feet, whichever is less, of any given street frontage of a new or altered structure parallel to and facing a street shall be devoted to parking and loading ingress or egress. Street-facing garage structures and garage doors may not extend closer to the street than a primary building facade unless the garage structure and garage door are consistent with the features listed in Section 136 of this

Code. The total street frontage dedicated to parking and loading access should be minimized, and combining entrances for off-street parking with those for off-street loading is encouraged. The placement of parking and loading entrances should minimize interference with street-fronting active uses and with the movement of pedestrians, cyclists, public transit, and autos. Entrances to off-street parking shall be located at least six feet from a lot corner located at the intersection of two public rights-of-way. Off-street parking and loading entrances should minimize the loss of on-street parking and loading spaces. Off-street parking and loading are also subject to the provisions of Section 155 of this Code.

- 3. With the exception of space allowed for parking and loading access, building egress, and access to mechanical systems, space for active uses as defined in Subsection (b) (2) and permitted by the specific district in which it is located shall be provided within the first 25 feet of building depth on the ground floor and 15 feet on floors above from any facade facing a street at least 30 feet in width.
- 4. Ground floor non-residential uses in all RC districts, shall have a minimum floor-to-floor height of 14 feet.
- 5. The floors of street-fronting interior spaces housing non-residential active uses and lobbies shall be as close as possible to the level of the adjacent sidewalk at the principal entrance to these spaces. Street-facing ground-level spaces housing non-residential active uses in hotels, office buildings, shopping centers, and other large buildings shall open directly onto the street, rather than solely into lobbies and interior spaces of the buildings. Such required street-facing entrances shall remain open to the public during business hours.
- 6. Frontages with active uses that are not residential or PDR must be fenestrated with transparent windows and doorways for no less than 60 percent of the street frontage at the ground level and allow visibility to the inside of the building. The use of dark or mirrored glass shall not count towards the required transparent area. Buildings located inside of, or within an unobstructed line of less than 300 feet of an Urban Bird Refuge, as defined in Section 139(c)(1), shall follow glazing requirements within Section 139(c) of this Code.
- 7. Any decorative railings or grillwork, other than wire mesh, which is placed in front of or behind ground floor windows, shall be at least 75 percent open to perpendicular view. Rolling or sliding security gates shall consist of open grillwork rather than solid material, so as to provide visual interest to pedestrians when the gates are closed, and to permit light to pass through mostly unobstructed. Gates, when both open and folded or rolled as well as the gate mechanism, shall be recessed within, or laid flush with, the building facade.

The subject commercial space has approximately 69 feet of frontage on Sutter Street and 92 feet of frontage on Fern Street, which is used as a secondary façade dedicated to a loading and service entrance. Approximately 143 feet of total frontage is devoted to either the store entrances or windows. The windows are clear and unobstructed, and meet the active use and minimum ceiling height requirements. The parking setback at the second floor is an existing legal non-conforming condition. The parking is screened from the street.

- B. **Parking**. Planning Code Section 161 of the Planning Code exempts off-street parking for any principal use in an RC-4 District for which the form of measurement is occupied floor area, where the occupied floor area of such use does not exceed 10,000 square feet.
 - The proposed principle use as a retail store dedicated to the handling of bulky merchandise per Planning Code Section 151 is approximately 8,000 square feet of area and will not require any parking.
- C. **Use Size.** Planning Code Sections 121.2 and 209.8(f), requires Conditional Use (CU) authorization for non-residential use exceeding 6,000 square feet in the RC-4 zoning district.
 - The existing 8,000 square foot retail space is a legal non-conforming condition and does not propose to expand. Therefore, no Conditional Use authorization is required.
- D. **Formula Retail.** Planning Code Section 703.3 defines Formula Retail as a type of retail sales activity or retail sales establishment which, along with eleven or more other retail sales establishments located in the United States, maintains two or more of the following features: a standardized array of merchandise, a standardized façade, a standardized décor and color scheme, a uniform apparel, standardized signage, a trademark or a servicemark. Planning Code Section 209.8(d) requires Conditional Use authorization for Formula Retail Use, as defined in Section 703.3(b) of this Code.
 - The proposed Formula Retail establishment features uniform apparel, and trademark or service mark with approximately 138 facilities in the continental United States, of which 91 are retail locations.
- E. **Signage**. Any proposed signage will be subject to the review and approval by the Planning Department and must comply with Article 6 of the Planning Code.
- 7. **Planning Code Section 303** establishes criteria for the Planning Commission to consider when reviewing applications for Conditional Use approval. On balance, the project does comply with said criteria in that:
 - A. The proposed new uses and building, at the size and intensity contemplated and at the proposed location, will provide a development that is necessary or desirable, and compatible with, the neighborhood or the community.
 - The proposed use will occupy an existing vacant retail space and does not involve an exterior expansion. The proposed establishment is consistent with the historic use of the subject site as a furniture sales location. The relatively large size of the retail space is appropriate for the proposed establishment involving bulky merchandise. The proposed formula retail use complements the mix of goods and services currently available in the district.
 - B. The proposed project will not be detrimental to the health, safety, convenience or general welfare of persons residing or working in the vicinity. There are no features of the project

that could be detrimental to the health, safety or convenience of those residing or working the area, in that:

- i. Nature of proposed site, including its size and shape, and the proposed size, shape and arrangement of structures;
 - The height and bulk of the existing building will remain the same and the project will not alter the existing exterior appearance or character of the project vicinity. No external expansion is proposed.
- ii. The accessibility and traffic patterns for persons and vehicles, the type and volume of such traffic, and the adequacy of proposed off-street parking and loading;
 - The existing traffic pattern will not be significantly affected by the proposed project. There is an abundance of public transit available within ¼ mile from the Subject Site including seven Muni lines (2, 3, 19, 38, 47, 49, and 90), and seven Golden Gate Transit lines (101X, 10, 54, 70, 80, 93, and 101). There is off-street parking in the subject building and on-street parking along frontages of the subject site and in the surrounding neighborhood.
- iii. The safeguards afforded to prevent noxious or offensive emissions such as noise, glare, dust and odor;
 - *The project is not anticipated to emit noxious or offensive noise, flare, dust or odor.*
- iv. Treatment given, as appropriate, to such aspects as landscaping, screening, open spaces, parking and loading areas, service areas, lighting and signs;
 - The proposed project will involve interior alterations and the Department will review all lighting and signs proposed for the expansion in accordance with the Planning Code.
- C. That the use as proposed will comply with the applicable provisions of the Planning Code and will not adversely affect the General Plan.
 - The project complies with all relevant requirements and standards of the Planning Code and is consistent with objectives and policies of the General Plan as detailed below.
- D. That the use as proposed would provide development that is in conformity with the purpose of the applicable Neighborhood Commercial District.
 - The proposed project is not located within a Neighborhood Commercial District.
- 8. **Planning Code Sections 303(i), 703.3(h) and 703.4** require Conditional Use authorization for the establishment of a Formula Retail Use in Neighborhood Commercial Districts. The Planning

Commission shall consider the following criteria set forth in Section 303(i) in addition to the criteria set forth in Section 303(c):

a. The existing concentrations of formula retail uses within the Neighborhood Commercial District.

The subject site is not in a Neighborhood Commercial District. Based on staff's survey, there are approximately 232 ground floor retail establishments along the Van Ness Avenue SUD within the RC-4 zoning district and approximately 44 (19%) of these businesses appear to qualify as formula retail uses. These formula retail uses are primarily financial institutions, car dealerships, restaurants and Limited-Restaurants.

Planning Department staff found seven existing formula retail uses (d.b.a. Mattress Discounters, Starbucks, Peet's, Nissan/Infinity, BevMo!, Verizon, and Fed-Ex/Kinkos) within the immediate two block radius. An eighth formula retail (d.b.a. CVS) use was approved on September 26, 2013.

b. The availability of other similar retail uses within the Neighborhood Commercial District.

The subject site is not in a Neighborhood Commercial District and is an expansion of an existing retail use. There are approximately four other furniture retailers within the subject district (excluding specialty mattress retailers). The nearest used furniture retailer is located two blocks north of the subject site, (d.b.a. Leftovers) which is not a formula retailer.

c. The compatibility of the proposed formula retail use with the existing architectural and aesthetic character of the Neighborhood Commercial District.

The subject site is not in a Neighborhood Commercial District; however, the proposed project will not involve significant modifications to the building's existing architectural and aesthetic character. There will be no expansion of the existing building envelope.

d. The existing retail vacancy rates within the Neighborhood Commercial District.

The subject site is not in a Neighborhood Commercial District; however, there are approximately 23 retail vacancies out of approximately 232 retail spaces within the RC-4 zoned portion of the Van Ness SUD, which is approximately 10%. There are approximately seven vacancies within the immediate two block radius, including the subject tenant space.

e. The existing mix of Citywide-serving retail uses and neighborhood-serving retail uses within the Neighborhood Commercial District.

The subject site is not in a Neighborhood Commercial District. The only other CORT location within the City is approximately 2 miles from the subject site and is not a furniture sales location. Hence, the proposed location will serve as a complementary use to the mix of goods and services along the Van Ness SUD. The proposed establishment will replace a previous furniture retailer location and will not significantly affect the character of the district.

9. **General Plan Compliance.** The Project is, on balance, consistent with the following Objectives and Policies of the General Plan:

VAN NESS AVENUE AREA PLAN

Objectives and Policies

OBJECTIVE 1:

CONTINUE EXISTING OF THE AVENUE AND ADD A SIGNIFICANT INCREMENT OF NEW HOUSING.

Policy 1.2:

Allow existing structures to remain in non-residential use.

The proposed development will preserve the existing commercial use in a building intended for commercial usage.

OBJECTIVE 5:

ENCOURAGE DEVELOPMENT WHICH REINFORCES TOPOGRAPHY AND URBAN PATTERN, AND DEFINES AND GIVES VARIETY TO THE AVENUE.

Policy 5.4:

Preserve existing view corridors.

No exterior expansions of the two-story building are proposed, thereby preserving existing view corridors.

OBJECTIVE 6:

ENCOURAGE DISTINGUISHED ARCHITECTURE WHOSE SCALE, COMPOSITION AND DETAILING ENHANCES THE OVERALL DESIGN STRUCTURE OF THE AVENUE AND RELATES TO HUMAN SCALE.

Policy 6.1:

Design exterior facades which complement and enhance significant works of architecture along the Avenue.

The proposed formula retail will preserve the historic resource by limiting modifications within existing openings.

OBJECTIVE 8:

CREATE AN ATTRACTIVE STREET AND SIDEWALK SPACE WHICH CONTRIBUTES TO THE TRANSFORMATION OF VAN NESS AVENUE INTO A RESIDENTIAL BOULEVARD.

Policy 8.2:

Where there are no trees, plant trees within the sidewalk space and the median strip. Maintain existing healthy trees and replace unhealthy ones.

The project sponsor will maintain the existing street trees along Sutter and Fern Streets.

OBJECTIVE 9:

PROVIDE SAFE AND EFFICIENT MOVEMENT AMONG ALL USERS ON VAN NESS AVENUE.

Policy 9.13:

Discourage access to freight loading facilities from Van Ness Avenue.

The proposed establishment does not front along Van Ness Avenue. The loading areas are accessed from Fern and Sutter Streets.

OBJECTIVE 11:

PRESERVE THE FINE ARCHITECTURAL RESOURCES OF VAN NESS AVENUE.

Policy 11.1:

Avoid demolition or inappropriate alteration of historically and architecturally significant buildings.

No modifications are proposed on the exterior, thereby preserving this known historic resource.

NEIGHBORHOOD COMMERCE

Objectives and Policies

OBJECTIVE 1:

MANAGE ECONOMIC GROWTH AND CHANGE TO ENSURE ENHANCEMENT OF THE TOTAL CITY LIVING AND WORKINIG ENVIRONMENT.

Policy 1.1:

Encourage development which provides substantial net benefits and minimizes undesirable consequences. Discourage development that has substantial undesirable consequences that cannot be mitigated.

Policy 1.2:

Assure that all commercial and industrial uses meet minimum, reasonable performance standards.

Policy 1.3:

Locate commercial and industrial activities according to a generalized commercial and industrial land use plan.

The proposed development will provide desirable goods and services to the neighborhood and will provide resident employment opportunities to those in the community.

OBJECTIVE 2:

MAINTAIN AND ENHANCE A SOUND AND DIVERSE ECONOMIC BASE AND FISCAL STRUCTURE FOR THE CITY.

Policy 2.1:

Seek to retain existing commercial and industrial activity and to attract new such activity to the City.

The project will replace a vacant storefront with a commercial activity that is consistent with the past use of the subject space.

NEIGHBORHOOD COMMERCE

OBJECTIVE 6:

MAINTAIN AND STRENGTHEN VIABLE NEIGHBORHOOD COMMERCIAL AREAS EASILY ACCESSIBLE TO CITY RESIDENTS.

Policy 6.1:

Ensure and encourage the retention and provision of neighborhood-serving goods and services in the city's neighborhood commercial districts, while recognizing and encouraging diversity among the districts.

The proposed use is neighborhood-serving in that it will provide affordable furniture options for the residents of the area. The project would not prevent the district from achieving optimal diversity in the types of goods and services available in the neighborhood.

Policy 6.4:

Encourage the location of neighborhood shopping areas throughout the city so that essential retail goods and personal services are accessible to all residents.

The proposed Formula Retail use will sell goods as its principal use, which will enhance the variety of complementary uses for this diverse area.

- 10. **Planning Code Section 101.1(b)** establishes eight priority-planning policies and requires review of permits for consistency with said policies. On balance, the project does comply with said policies in that:
 - A. That existing neighborhood-serving retail uses be preserved and enhanced and future opportunities for resident employment in and ownership of such businesses be enhanced.

The proposal would preserve and enhance the district by replacing a vacant storefront. The proposed alterations are within the existing building footprint.

B. That existing housing and neighborhood character be conserved and protected in order to preserve the cultural and economic diversity of our neighborhoods.

The existing residential units in the surrounding neighborhood would not be adversely affected. The subject building is a known historic resource and will be preserved.

C. That the City's supply of affordable housing be preserved and enhanced,

No housing is removed for this project.

D. That commuter traffic not impede MUNI transit service or overburden our streets or neighborhood parking.

The project site is in the Van Ness corridor and is well served by 14 lines of bus transit, and both onand off-street parking is available.

E. That a diverse economic base be maintained by protecting our industrial and service sectors from displacement due to commercial office development, and that future opportunities for resident employment and ownership in these sectors be enhanced.

The project will not displace any service or industry establishment. The project will not affect industrial or service sector uses or related employment opportunities. Ownership of industrial or service sector businesses will not be affected by this project. The project proposes to replace a storefront that has been vacant since 2011.

F. That the City achieve the greatest possible preparedness to protect against injury and loss of life in an earthquake.

The project is designed and will be constructed to conform to the structural and seismic safety requirements of the City Building Code. This proposal will not affect the property's ability to withstand an earthquake.

G. That landmarks and historic buildings be preserved.

The project will not alter any character defining features for this building.

H. That our parks and open space and their access to sunlight and vistas be protected from development.

The project will have no negative affect on existing parks and open spaces.

- 11. The Project is consistent with and would promote the general and specific purposes of the Code provided under Section 101.1(b) in that, as designed, the Project would contribute to the character and stability of the neighborhood and would constitute a beneficial development.
- 12. The Commission hereby finds that approval of the Conditional Use authorization would promote the health, safety and welfare of the City.

DECISION

That based upon the Record, the submissions by the Applicant, the staff of the Department and other interested parties, the oral testimony presented to this Commission at the public hearings, and all other written materials submitted by all parties, the Commission hereby **APPROVES Conditional Use Application No. 2013.1329C** subject to the following conditions attached hereto as "EXHIBIT A" in general conformance with plans on file, dated September 17, 2013, and stamped "EXHIBIT B", which is incorporated herein by reference as though fully set forth.

APPEAL AND EFFECTIVE DATE OF MOTION: Any aggrieved person may appeal this Conditional Use Authorization to the Board of Supervisors within thirty (30) days after the date of this Motion No. XXXX. The effective date of this Motion shall be the date of this Motion if not appealed (After the 30-day period has expired) OR the date of the decision of the Board of Supervisors if appealed to the Board of Supervisors. For further information, please contact the Board of Supervisors at (415) 554-5184, City Hall, Room 244, 1 Dr. Carlton B. Goodlett Place, San Francisco, CA 94102.

I hereby certify that the Planning Commission ADOPTED the foregoing Motion on August 8, 2013.

Jonas P. Ionin
Acting Commission Secretary

AYES:

NAYS:

ABSENT:

January 16, 2014

ADOPTED:

EXHIBIT A

AUTHORIZATION

This authorization is for a conditional use to allow the establishment of a new formula retail use (d.b.a. CORT) at 1320 Sutter Street, Block 0671, and Lot 002 pursuant to Planning Code Sections 303, 703.3 and 703.4 within the RC-4 (Residential-Commercial Combined, High Density) District, a 130-V Height and Bulk District, and the Van Ness Special Use District; in general conformance with plans, dated **September 17, 2013**, and stamped "EXHIBIT B" included in the docket for Case No. **2013.1329C** and subject to conditions of approval reviewed and approved by the Commission on **January 16, 2014**, under Motion No. **XXXX**. This authorization and the conditions contained herein run with the property and not with a particular Project Sponsor, business, or operator.

RECORDATION OF CONDITIONS OF APPROVAL

Prior to the issuance of the building permit or commencement of use for the Project the Zoning Administrator shall approve and order the recordation of a Notice in the Official Records of the Recorder of the City and County of San Francisco for the subject property. This Notice shall state that the project is subject to the conditions of approval contained herein and reviewed and approved by the Planning Commission on January 16, 2014 under Motion No. XXXX.

PRINTING OF CONDITIONS OF APPROVAL ON PLANS

The conditions of approval under the 'Exhibit A' of this Planning Commission Motion No. **XXXX** shall be reproduced on the Index Sheet of construction plans submitted with the Site or Building permit application for the Project. The Index Sheet of the construction plans shall reference to the Conditional Use authorization and any subsequent amendments or modifications.

SEVERABILITY

The Project shall comply with all applicable City codes and requirements. If any clause, sentence, section or any part of these conditions of approval is for any reason held to be invalid, such invalidity shall not affect or impair other remaining clauses, sentences, or sections of these conditions. This decision conveys no right to construct, or to receive a building permit. "Project Sponsor" shall include any subsequent responsible party.

CHANGES AND MODIFICATIONS

Changes to the approved plans may be approved administratively by the Zoning Administrator. Significant changes and modifications of conditions shall require Planning Commission approval of a new Conditional Use authorization.

Conditions of Approval, Compliance, Monitoring, and Reporting

PERFORMANCE

1. **Validity.** The authorization and right vested by virtue of this action is valid for three (3) years from the effective date of the Motion. The Department of Building Inspection shall have issued a Building Permit or Site Permit to construct the project and/or commence the approved use within this three-year period.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

2. Expiration and Renewal. Should a Building or Site Permit be sought after the three (3) year period has lapsed, the project sponsor must seek a renewal of this Authorization by filing an application for an amendment to the original Authorization or a new application for Authorization. Should the project sponsor decline to so file, and decline to withdraw the permit application, the Commission shall conduct a public hearing in order to consider the revocation of the Authorization. Should the Commission not revoke the Authorization following the closure of the public hearing, the Commission shall determine the extension of time for the continued validity of the Authorization.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

3. Diligent pursuit. Once a site or Building Permit has been issued, construction must commence within the timeframe required by the Department of Building Inspection and be continued diligently to completion. Failure to do so shall be grounds for the Commission to consider revoking the approval if more than three (3) years have passed since this Authorization was approved.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

4. **Extension.** All time limits in the preceding three paragraphs may be extended at the discretion of the Zoning Administrator where implementation of the project is delayed by a public agency, an appeal or a legal challenge and only by the length of time for which such public agency, appeal or challenge has caused delay.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

5. **Conformity with Current Law.** No application for Building Permit, Site Permit, or other entitlement shall be approved unless it complies with all applicable provisions of City Codes in effect at the time of such approval.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

DESIGN

6. Garbage, composting and recycling storage. Space for the collection and storage of garbage, composting, and recycling shall be provided within enclosed areas on the property and clearly labeled and illustrated on the architectural addenda. Space for the collection and storage of recyclable and compostable materials that meets the size, location, accessibility and other standards specified by the San Francisco Recycling Program shall be provided at the ground level of the buildings.

For information about compliance, contact the Case Planner, Planning Department at 415-558-6378, www.sf-planning.org.

MONITORING


7. **Enforcement.** Violation of any of the Planning Department conditions of approval contained in this Motion or of any other provisions of Planning Code applicable to this Project shall be subject to the enforcement procedures and administrative penalties set forth under Planning Code Section 176 or Section 176.1. The Planning Department may also refer the violation complaints to other city departments and agencies for appropriate enforcement action under their jurisdiction. For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

OPERATION


- 8. **Sidewalk Maintenance.** The Project Sponsor shall maintain the main entrance to the building and all sidewalks abutting the subject property in a clean and sanitary condition in compliance with the Department of Public Works Streets and Sidewalk Maintenance Standards. For information about compliance, contact Bureau of Street Use and Mapping, Department of Public Works, 415-695-2017, http://sfdpw.org/
- 9. **Community Liaison.** Prior to issuance of a building permit to construct the project and implement the approved use, the Project Sponsor shall appoint a community liaison officer to deal with the issues of concern to owners and occupants of nearby properties. The Project Sponsor shall provide the Zoning Administrator with written notice of the name, business address, and telephone number of the community liaison. Should the contact information change, the Zoning Administrator shall be made aware of such change. The community liaison shall report to the Zoning Administrator what issues, if any, are of concern to the community and what issues have not been resolved by the Project Sponsor.

For information about compliance, contact Code Enforcement, Planning Department at 415-575-6863, www.sf-planning.org

Parcel Map

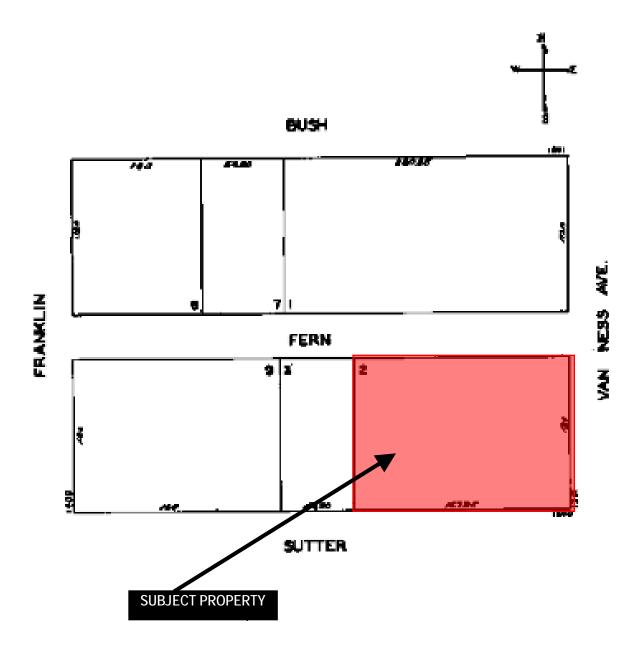


Sanborn Map*

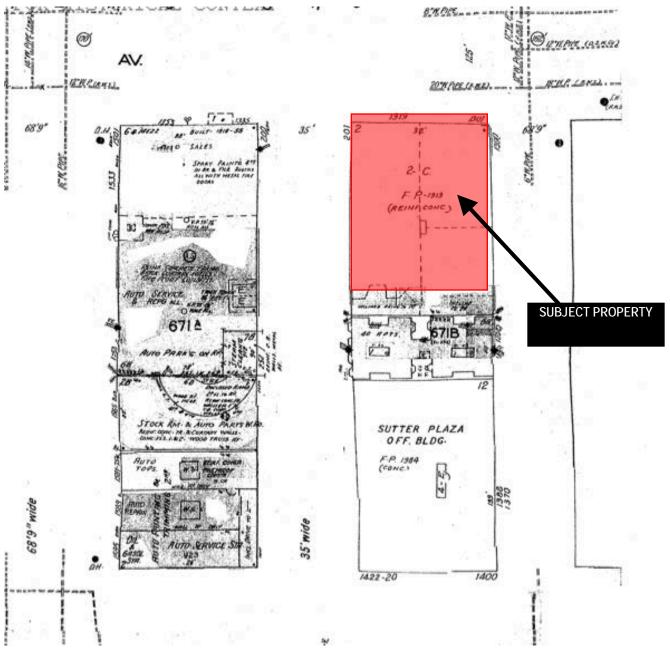

*The Sanborn Maps in San Francisco have not been updated since 1998, and this map may not accurately reflect existing conditions.


Zoning Map

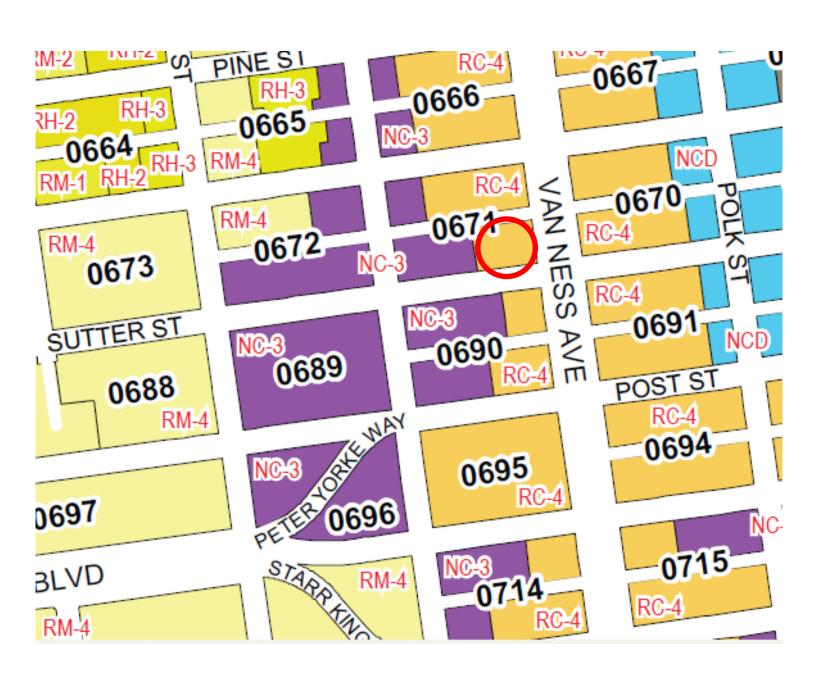

Formula Retail Map

1301 Van Ness Ave - Survey



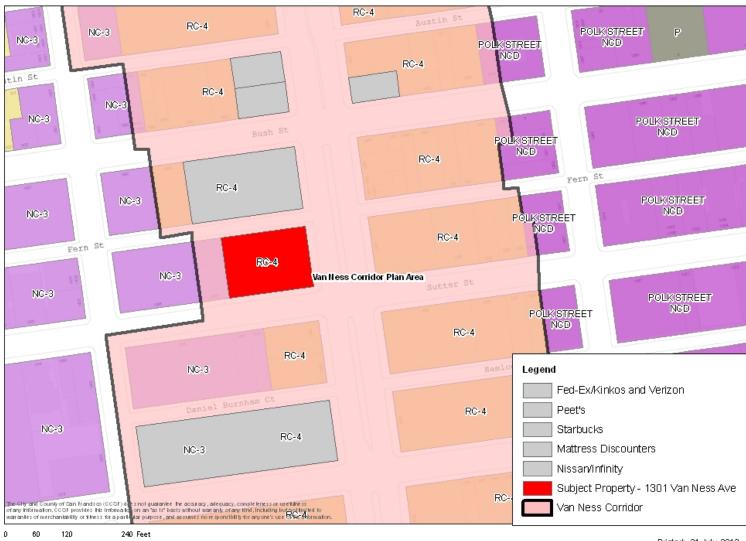


Printed: 31 July, 2013

Aerial Photo View to North



SUBJECT PROPERTY


Aerial Photo View to West

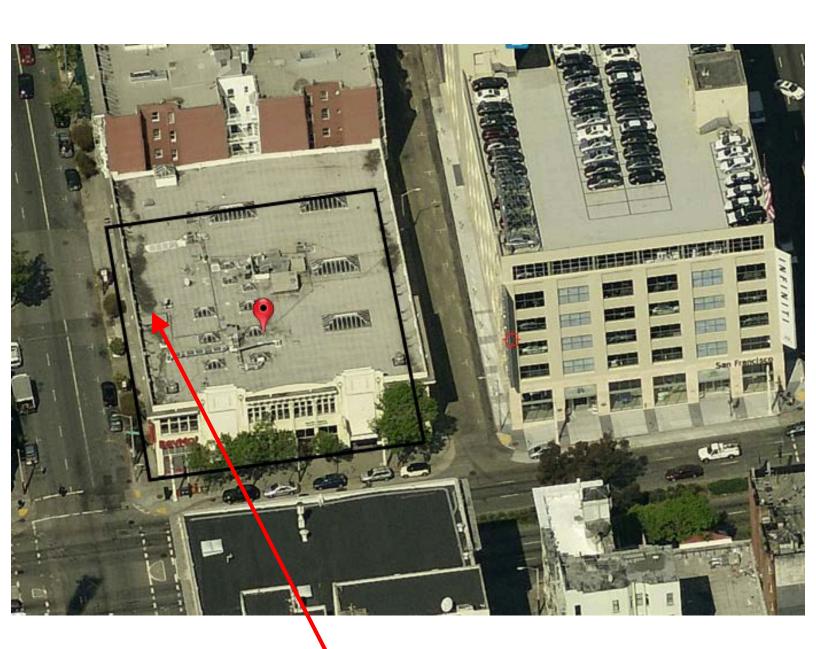

SUBJECT PROPERTY


Aerial Photo View to South



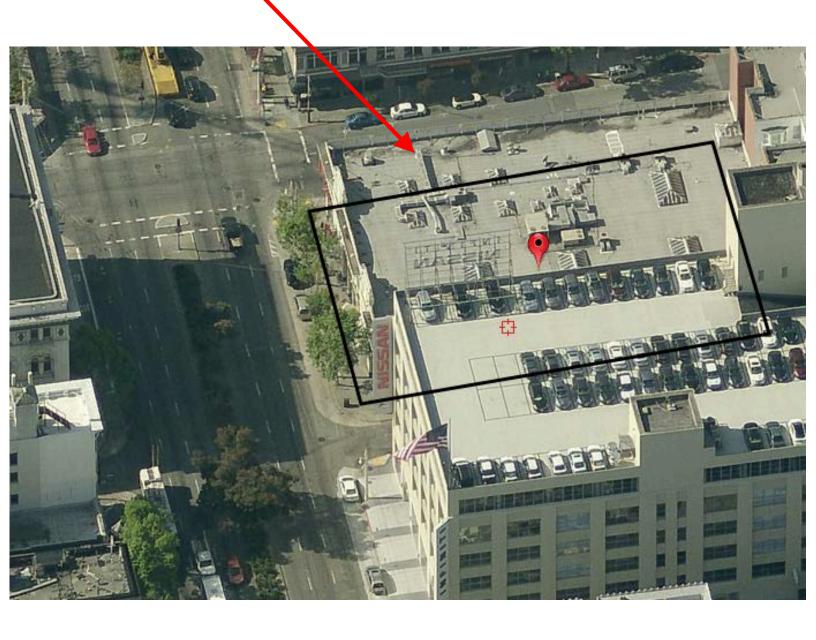



Site Photo




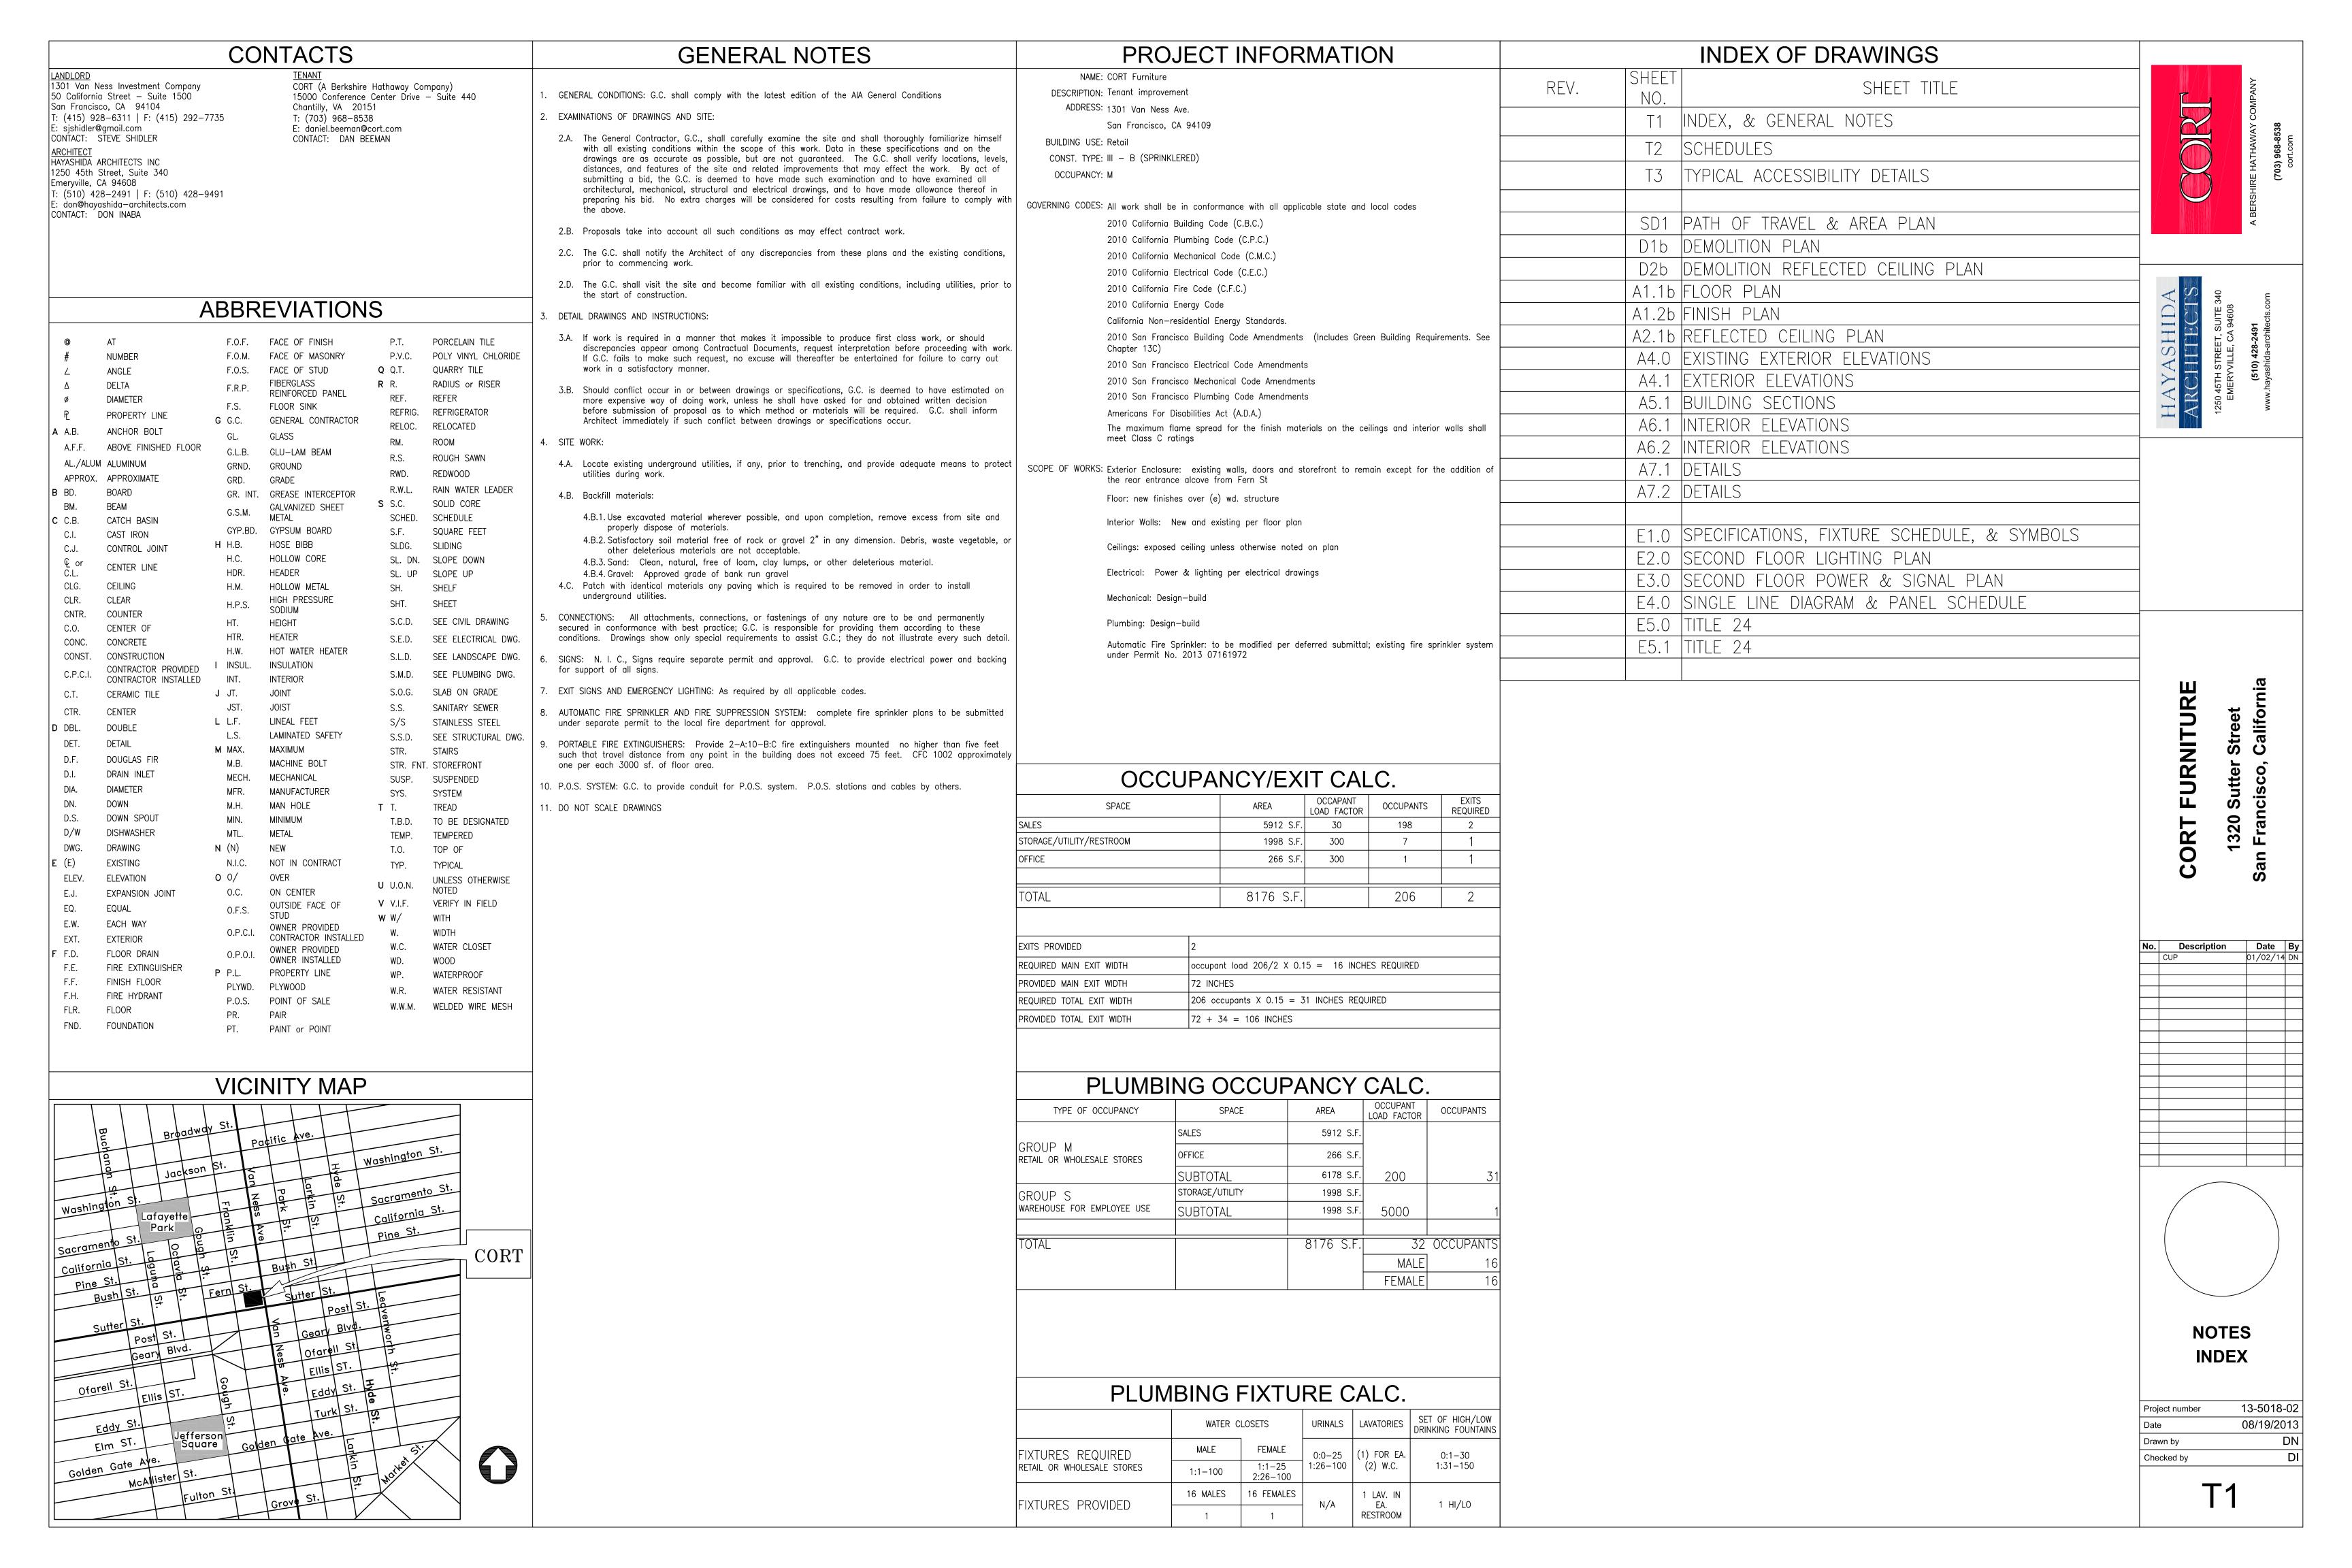

				HARDWA	RE SC	HEDL	JLE											DO	OR S	CHE	EDULE	
NO. FUNCTION	HINGES	LOCKS	SET PANIC	CLOSER DOORSTO)P SILENCE	R KICK	WEATHER-	THRESHOLD	OTHER / NO	OTES	NO.	\\\/	Н	DOOR THK M	AT FII	N GLASS	FRAI MAT		FIRE D RATING T	OOR TYPF	REMARKS	ANY
VARIOUS (F)		REKEY (E) AS RE		ARE		PLATES	STRIPPING		EXISTING		/200X	7'-9"	7'-0"		STL. PT		(E) STL.		TATINO I) ROLL-UP DOOR TO SUTTER ST.	Y COMP,
VARIOUS (E) (E) ENTRANCE		REKEY (E)	LQUINED						EXISTING POWER-OPERATED DOORS		X_		7 -0	(L)	SIL. PI	1.	(L) 31L.	F1.		(-) NOLL-OF BOOK TO SOTTEN ST.	AWAY AWAY
AI/		(E) PRIVACY TYPE	E LEVER						EXISTING FOWER-OPERATED DOORS			6'-0" PR 3'-0"	7'-0"	(E)	ALUM (E	E) (E) TEMP	(E)	(E)		(E) ENTRY DOORS FROM SUTTER ST.	HATH/ 03) 968
(E) RESTROOM	1-1/2 PAIR BUTTS	LÓCKSET		• •	•				EXISTING		203A A	3'-0"	7'-0"	1-3/4" S.C	WD. PT	т.	MTL	PT.		BB UI	TILTY ROOM	SHIRE (7
A UTILITY				•	•				AUTOMATIC DOOR BOTTOM; SOUND GASKET		204X	3'-0"	7'-0"	1-3/4" (E) S	C. WD. PT	т.	(E) MTL	PT.		(E) MECH ROOM	A BER&
B OFFICE	1-1/2 PAIR BUTTS	OFFICE TYPE LEVE		• •					AUTOMATIC DOOR BOTTOM; SOUND GASKET		<u>205X</u>	3'-0"	7'_0"	1-3/4" (E) S	C WD PT	т	(E) MTL	PT.		(F) RESTROOM	
STORAGE DOUBLE DOOR		STORAGE TYPE LE		•	•		_				X2 /											
D EXIT	1-1/2 PAIR BUTTS	ENTERANCE TYPE I		• •	•	•	•		DOOR BOTTOM		206X X2	3'-0"	7'-0"	1-3/4" (E) S	C. WD. PT	Т.	(E) MTL	PT.		(E) RESTROOM	340 m
ENTRANCE	1-1/2 PAIR BUTTS	LOCKSET	LEVER	• •	•		•		DOOR BOTTOM		207 A	3'-0"	7'-0"	1-3/4" S.C	WD. PT	т.	MTL	PT.		GG TE	LEPHONE / DATA	1) / 11 34 4608 cts.cor
VESTIBULE VESTIBULE	1-1/2 PAIR BUTTS	PASSAGE TYPE LE	EVER LOCKSET	• •	•						208 B	3'-0"	7'-0"	1-3/4" S.C	WD. PT	T. TEMPERED	MTL	PT.		CC OF	FICE	YASHIID YASHIID TH STREET, SUITE 3 RYVILLE, CA 94608 (510) 428-2491
SECURITY									ROLL-UP DOOR HARDWARE BY MFR		209	6'-0" PR 3'-0"	7'-0"	1-3/4" S.C	WD. PT	т.	MTL	PT.		DD HO	DLDING AREA TO SALE AREA 03	AS STRE VILLE
														,		т						」 iç 川
				ROOM FIN	ISH SC	CHED	ULE					6'-0" PR 3'-0"			WD. PT	1.	MTL	PT.			ADING AREA TO HOLDING AREA	HA 1250 4 EN EW.
NO. ROOM NAME	FLOOR	BASE	MATERIAL WA		MATERIAL (CEILING T FI	NISH		REMARKS		B/	3'-0"	7'-0"	1-3/4" S.C	WD. PT	Г.	MTL	PT.		BB RE	CEIVING AREA TO (E) TRASH AREA	
201 SALE #1	CARPET	RUBBER BASE	GYP. BD. PAII	NT EXPO	SED STRUCTURE	PAINT (E) STRU	CTURE				210X X	8'-0"	8'-0"	(E)	STL. PT	т.	(E) STL.	PT.		(E) ROLL-UP DOOR TO LOADING AREA	
202 SALE #2 203 SALE #3	CARPET CARPET	RUBBER BASE RUBBER BASE	GYP. BD. PAII		SED STRUCTURE SED STRUCTURE						211A D	3'-0"	7'-0"	1-3/4" ⊦	M. PT	т.	MTL	PT.		вв но	OLDING AREA TO FERN ST.	
203 SALE #3	SHEET VINYL	INTEGRAL COVE BASE			SED STRUCTURE			CEILING TO BE PAIN	ITED SMOOTH WITH NO TEXTURE		<u>211B</u>	3'-0"	7'-0"	1-3/4" S.C	WD. PT	T. TEMPERED	MTL	PT.		EE SA	LE AREA 03 TO VESTIBULE	1
204 (E) MECH / ELEC RM		INTEGRAL COVE BASE	(E) W.D. OVD. DD. SEN	MI-GLOSS PAINT (E) ON	SED STRUCTURE			MALLS AND SEVEN	TO DE DAINTED CHAOTH WITH HE TENTINE		211C	3'-0"			M. PT	T. TEMPERED	MTL	PT.		FF \/F	STIBULE TO FERN ST.	-
205 (E) WOMEN 206 (E) MEN	(N) SHEET VINYL (N) SHEET VINYL	INTEGRAL COVE BASE	(E) W.R. GYP. BD. (E)	4FT FRP WAINSCOT (E) GY MI-GLOSS PAINT (E) ON	P. BD. P. BD.	SEMI-GLOSS			TO BE PAINTED SMOOTH WITH NO TEXTURE TO BE PAINTED SMOOTH WITH NO TEXTURE		211D			, ,		T. I.W. LIVED						-
207 TELEPHONE / DATA		INTEGRAL COVE BASE	(L)	4FI FRP WAINSCOI	SED STRUCTURE			LLO AND CÉILING	DE TAMBLE SMOOTH WITH NO TEXTURE		<u>211D</u> G	3'-10"	7'-0"	S	L. PT	1.	STL.	PT.		FF RC	DLL-UP DOOR TO FERN ST.	-
208 OFFICE	CARPET	RUBBER BASE	GYP. BD. PAII		SED STRUCTURE	` ' '			ATE													
209 HOLDING AREA 210 LOADING AREA	SHEET VINYL (E) MTL PLATE FLR	INTEGRAL COVE BASE RUBBER BASE	GYP. BD. PAII (E) GYP. BD. PAII		SED STRUCTURE SED STRUCTURE	` ' '		REMOVE (E) MTL PI	AIE													
211 VESTIBULE	CARPET	RUBBER BASE	GYP. BD. PAII	NT EXPO	SED STRUCTURE	PAINT (E) STRU	CTURE															
NOTE:			NEEDED FOR GUOGEL A		DANTING									DOC	R T	YPES					DOOR NOTES	ы Б
I. (E) WALL/CEILING/EXPOSED S	STRUCTURE SHALL BE RE	EPAIRED & LEVELED AS	NEEDED FOR SMOOTH &	LEVEL APPEARANCE PRIOR IC	PAINTING										_					1 411	NOTES CODES	URE set ifornia
																				of	egress doors shall be readily openable from the egress side without the use a key or special knowledge or effort. Section 1008.1.9 Inually operated flush bolts or surface bolts are not permitted.	↓ ⊢ ≝ =
												/ -	_S.C. OR H.	.M. DOOR,		S.C.	OR H.M. I	000R,			e main exterior door or doors are permitted to be equipped with key	N. S.
													SEE DOOR	SCHED.	K	SEE	DOOK SCF	1ED.		op sic	erated locking devices from the egress side when a readily visible durable	UR utter
																				DC let	OR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED". The sign shall be in ters 1 inch high on a contrasting background.	ہ ہے ای
																S/S	KICKPLATE	-		as	doors into fire rated corridor, where occurs, shall be 20—minute rated semblies with gaskets for smoke and draft control. Door and assemblies shall 2010 CBC	RT 320 Fran
	FIN	IISH SCH	IFDUI F				RE	ESPON	SIBILITY SCHEDUL	LE		ΛA				3B				let	ar an approved label showing the rating. (i.e., 20—minute) followed by the Section 715.4.3, and 715.4.6.3	0 7 =
FLOO	ORING & BASE	11011 0011				SI		ITEM	SUPPLIED	BY INSTALLED BY		NA				סס				5. Mc	Iximum door opening efforts; 5 lbs. at exterior; 5 lbs. at interior, and 15lbs. 2010 CBC Section 1133B.2.5	S S
MATERIAL	MFR COLOR	SIZE	PAINT: 1. SALE AREA WALLS: SA				OF MILES PARIN		CORT	GC CORT GC										6. AII	doors to be equipped with single-effort, non-grasp hardware (i.e. lever) ntered between 30" and 44" above the floor. 2010 CBC Section 1133b.2.5.2	1
RF SHEET VINYL W/ 01 INTEGRAL COVE BASE			2. RESTROOM WALLS: SE		1 ()5 LIGHT G/	GE MTL FRAMIN								Γ						ors shall swing in the direction of egress travel where serving an occupant 50 or more persons. 2010 CBC Section 1008.1.2	┪
RB BURDED COVE DAGE	+		3. METAL COLUMNS: SEM	MI-GLOSS OIL) C OFFICE		G												7. Do of	50 or more persons.	
RUBBER COVE BASE	TBD TBD	4"	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT 	MI-GLOSS OIL	()6 OFFICE	CASEWORK	G		• •				"H VIEW PANEL IPERED GLASS	N/		s.c.	. OR H.M.	. DOOR.	of 8. Th	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.2 2010 CBC Section 1008.1.7.	No. Description Date CUP 01/02/1
O1 RUBBER COVE BASE CP O1 CARPET TILE	TBD TBD PATCRAFT TBD	4" 24 X 24	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM	() () EL.)6 SALE AR	CASEWORK EA CASEWORK	G	•	• •			CLEAR TEM	IPERED GLASS	N/		S.C SEE	OR H.M. DOOR S	. DOOR, CHED.	of 8. Th be 9. Ev	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". 2010 CBC Section 1008.1.7. ery required exit doorway shall be capable of opening at least 90 degrees,	No. Description Date CUP 01/02/1
CP CARPET TILE	1.22	4"	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS E AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL	CL. A C)6 SALE AR)7 STUCCO	CASEWORK EA CASEWORK	G						IPERED GLASS	N/		S.C SEE	. OR H.M. DOOR S	. DOOR, CHED.	8. Th be 9. Ev sh to	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4".	No. Description Date CUP 01/02/
CP CARPET TILE CP CARPET CARPET CP CARPET SF RECESSED ENTRANCE	PATCRAFT TBD	4"	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE (AND CEILINGS AT RES PAINTED SMOOTH WITH INSTALL GYP.BD. LEVE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT	EL. A WALLS TO BE)6 SALE AR)7 STUCCO)8 DOORS	CASEWORK EA CASEWORK		•				CLEAR TEM	IPERED GLASS	N/ [S.C SEE			8. The beed of the	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. For handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or	No. Description Date CUP 01/02/
CP CARPET TILE CP CARPET CP CARPET SF RECESSED ENTRANCE FLOOR MAT	PATCRAFT TBD PATCRAFT TBD TBD TBD	4" 24 X 24	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE (AND CEILINGS AT RES PAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXF 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE	CEL. A WALLS TO BE C &)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI	CASEWORK EA CASEWORK SHES EXCEPT CA	ARPET					CLEAR TEM	IPERED GLASS						9. Ev sh to inc	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. or handles, pulls, latches, locks, and other operating devices on doors	No. Description Date CUP 01/02/1
CP CARPET TILE CP CARPET CARPET CP CARPET SF RECESSED ENTRANCE	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	4"	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE (AND CEILINGS AT RES PAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXF 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH &	EL. A WALLS TO BE C LEVEL)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET	CASEWORK EA CASEWORK SHES EXCEPT CA	ARPET			C	CC	CLEAR TEM	IPERED GLASS						9. Ev sh to inc	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are t permitted. The unlatching of any door or leaf shall not require more than e operation. nen installed, doorways shall have a minimum clear opening of 32 inches with	No. Description Date CUP 01/02/1
CP CARPET TILE CP O2 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE	PATCRAFT TBD PATCRAFT TBD TBD TBD	4" 24 X 24 18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE (AND CEILINGS AT RES PAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXF REPAIRED & LEVELED APPEARANCE PRIOR T FRP: WATER RESISTANT FIBERGL 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL	EL. A WALLS TO BE C LEVEL 1)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET () INTERIOR	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE	ARPET			C		CLEAR TEM	IPERED GLASS		DD 6"+	S/S			9. Ev sh to inc. 10. Do rec tw no on 11. Whether the	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. For handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are t permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with e door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall to be opened by a smooth, uninterrupted surface to allow the door to be opened by a	No. Description Date CUP 01/02/1
CP CARPET TILE CP CARPET CP CARPET SF RECESSED ENTRANCE FLOOR MAT	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	4" 24 X 24 18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE (AND CEILINGS AT RES PAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXF REPAIRED & LEVELED APPEARANCE PRIOR T FRP: WATER RESISTANT FIBERGL 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO	EL. A WALLS TO BE C LEVEL 1)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE	ARPET			C		CLEAR TEM	IPERED GLASS			S/S			9. Ev sh to income two noon 11. When the shade when no	the threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Sety required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. For handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with the door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a neelchair footrest without creating a trap or hazardous condition. Where the province of the control of the province of t	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P O1 WHITE PAINT P TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T FRP: WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SIN FINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO	EL. A WALLS TO BE C LEVEL LS ARE ROOM)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE	ARPET			C C	CC	CLEAR TEM	IPERED GLASS	, -4"	DD 6"+	S/S	S KICKPLA	TE -	9. Ev sh to inc. 10. Do rec tw no on 11. Wh the	threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Sery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. Or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. Then installed, doorways shall have a minimum clear opening of 32 inches with the door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a neelchair footrest without creating a trap or hazardous condition. Where the push side of the door which will allow the door to be opened by a neelchair footrest without creating a trap or hazardous condition.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P O1 WHITE PAINT P TBD P O2 TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXERPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE C LEVEL LS ARE ROOM)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR TOILET F	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE EQUIPMENTS	ARPET			C C	CC	CLEAR TEM	IPERED GLASS	, -4"	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The edge to be edge to be veled with a slope not greater, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 sches in height. The height. The unlatches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with the door open 90 degrees. The best of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a leelchair footrest without creating a trap or hazardous condition. Where the push side of the door which will allow the door to be opened by a leelchair footrest without creating a trap or hazardous condition.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P O1 WHITE PAINT P TBD P TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T FRP: WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SIN FINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE C LEVEL LS ARE ROOM)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR TOILET F SALE AR	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS	ARPET			C (a)	CC.	CLEAR TEM	IPERED GLASS	, -4"	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Set y required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 shes in height. Or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with endoor open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. Where errow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P O1 WHITE PAINT P TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & LEVEL 1 LS ARE PRIOR TO)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR TOILET F SALE AR POS SYS	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS STEM	ARPET	•		C 'o, "0-	CC ST	CLEAR TEM —S.C. DOOR ——CLEAR TE	IPERED GLASS	, -4"	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with eadoor open 90 degrees. The boltom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition. Where errow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition. The total case of the door which will allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition. The total case of the door which will allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition. The total case of the door which will allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition. The total case of the door which will allow the door to be opened by a weelchair footrest without creating a trap or hazardous condition.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	LEVEL LS ARE D ROOM PRIOR TO 1)6 SALE AR)7 STUCCO)8 DOORS)9 ALL FINI CARPET O INTERIOR EXTERIOR TOILET F SALE AR POS SYS	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS STEM INGS	ARPET	•		6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6	CC ST	CLEAR TEM —S.C. DOOR ——CLEAR TE	IPERED GLASS	7,-4"	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Set y required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 shes in height. Or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with endoor open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. Where errow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition. The transfer of the door which will allow the door to be opened by a levelchair footrest without creating a trap or hazardous condition.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	LEVEL LS ARE D ROOM PRIOR TO 1	96 SALE AR 97 STUCCO 98 DOORS 99 ALL FINI CARPET 9 INTERIOR EXTERIOR TOILET F SALE AR POS SYS 2 FURNISH 21 AUTOMAT	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKL	ARPET	•		6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6	CC.	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	EMPERED GLASS H.M. DOOR	**************************************	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 these in height. The very required to be accessible shall not require tight grasping, tight pinching or sisting of the wrist to operate. Manually operated bolts or surface bolts are the permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with ele door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a telechair footrest without creating a trap or hazardous condition. Where errow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a telechair footrest without creating a trap or hazardous condition. The very required exit doorways shall be self closing. The door very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD TBD TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	LEVEL LS ARE D ROOM PRIOR TO 1	2 FURNISH CARPET AUTOMAT PIRE EXTERIOR POS SYS	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKLE TINGUISHERS G: DESIGN BUIL	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W	& DRINKING FOUNTAINS; (N)		1,-0,,	CC.	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	IPERED GLASS	**************************************	DD 6"+	S/S	S KICKPLA	TE -	9. Even show to income the second sec	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 shes in height. or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are the permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with electron door open 90 degrees. The boltom 10 inches of all doors except automatic and sliding doors shall vere a smooth, uninterrupted surface to allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. Where the push side of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The push side of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The push side of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The push side of the door which will allow the door to match walls, use min-gloss paint on doors and trim ckset by schlage or equal	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P O1 WHITE PAINT P TBD P TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & C LEVEL 1 LS ARE D ROOM PRIOR TO 1	22 PLUMBIN LAVATOR	CASEWORK EA CASEWORK SHES EXCEPT C/ & CARPET ADHE SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS TINGUISHERS G: DESIGN BUIL ES, WATER CLOS	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		1,-0,,	CC EE	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	EMPERED GLASS H.M. DOOR DE OF STRUCTU	**************************************	DD 6"+	S/S	S KICKPLA	TE -	of 8. Th be 9. Ev sh to ind 10. Do red tw no on 11. Wh the 12. Th ha wh na on wh 11. Ins 12. All 13. Pa see 14. Lo	threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". The ery required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 these in height. The very required to be accessible shall not require tight grasping, tight pinching or sisting of the wrist to operate. Manually operated bolts or surface bolts are the permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with ele door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a telechair footrest without creating a trap or hazardous condition. Where errow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a telechair footrest without creating a trap or hazardous condition. The very required exit doorways shall be self closing. The door very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing. The very required exit doorways shall be self closing.	No. Description Date CUP 01/02/1
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & LEVEL 1 LS ARE PROOM PRIOR TO 1	22 PLUMBIN LAVATOR	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKLE TINGUISHERS G: DESIGN BUILE ES, WATER CLOS CAL: DESIGN BU	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	EMPERED GLASS H.M. DOOR DE OF STRUCTU	**************************************	DD 6"+	S/S	S KICKPLA	TE -	of 8. Th be 9. Ev sh to ind 10. Do red tw no on 11. Wr the 12. Th ha wh na on wh 11. Ins 12. All 13. Pa see 14. Lo 1. Provida.	the threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. By required exit doorway shall be capable of opening at least 90 degrees, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 ches in height. The properties of the wrist to operate. Manually operated bolts or surface bolts are the permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with e door open 90 degrees. Be bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. Where rrow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. Where rrow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the door which will allow the door to be opened by a seelchair footrest without creating a trap or hazardous condition. The properties of the properties of the properties of the properties of t	CUP 01/02/
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & LEVEL 1 LS ARE PROOM PRIOR TO 1	24 SALE AR POS SYS 2 FURNISH 21 AUTOMAT FIRE EX 22 PLUMBIN LAVATOR 26 ELECTRIC	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS TIEM INGS IC FIRE SPRINKLE TINGUISHERS G: DESIGN BUILES, WATER CLOSE CAL: DESIGN BU	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	EMPERED GLASS H.M. DOOR DE OF STRUCTU	**************************************	DD 6"+	S/S	S KICKPLA	TE -	9. Ev sh to income two non on 11. When the 12. The had well and on whe 13. Part see 14. Lo	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. Ery required exit doorway shall be capable of opening at least 90 degrees, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 thes in height. Or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or isting of the wrist to operate. Manually operated bolts or surface bolts are the permitted. The unlatching of any door or leaf shall not require more than e operation. The installed, doorways shall have a minimum clear opening of 32 inches with e door open 90 degrees. Bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a reclechair footrest without creating a trap or hazardous condition. Where rrow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a reclechair footrest without creating a trap or hazardous condition. Section 1008.1.7. DOOR SIGNAGE NOTES NOTES ONOTES ONOTES OA CODES The de tactile exit signage at the following locations with the following words: Each grade level exterior exit door — "EXIT" Each exit door that leads directly to a grade level exterior exit by means of a stairway or ramp—"EXIT STAIR DOWN", "EXIT RAMP DOWN" "EXIT STAIR UP", 2010 CBC	CUP 01/02/
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & C LEVEL 1 LS ARE PROOM PRIOR TO 1 2 2 2 2	22 PLUMBIN LAVATOR 26 ELECTRIC 27 STUCCO 28 DOORS 29 ALL FINI CARPET OINTERIOR TOILET F SALE AR POS SYS 2 FURNISH 21 AUTOMAT FIRE EX 22 PLUMBIN LAVATOR 23 MECHANI 26 ELECTRIC LIGHTING	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKL TINGUISHERS G: DESIGN BUIL ES, WATER CLOS CAL: DESIGN BU EAL FIXTURES	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	CLEAR TEM —S.C. DOOR —CLEAR TE —S.C. OR	EMPERED GLASS H.M. DOOR DE OF STRUCTU	**************************************	DD 6"+	S/S	S KICKPLA	TE -	of 8. Th be 9. Ev sh to ind 10. Do red tw no on 11. Wh the 12. Th ha wh na on wh 11. Ins 12. All 13. Pa see 14. Lo 1. Provida. b.	the threshold shall be no higher than 1/2" above the floor. The edge to be weled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. Section	SCHEDULES
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & C LEVEL 1 LS ARE PROOM PRIOR TO 1 2 2 2 2	22 PLUMBIN LAVATOR 27 PHONE S	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKL TINGUISHERS G: DESIGN BUIL ES, WATER CLOS CAL: DESIGN BU EAL FIXTURES SYSTEM	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	—CLEAR TEM —S.C. DOOR —UNDERSIE —16"W x 8"H	EMPERED GLASS H.M. DOOR DE OF STRUCTU H LOUVER	**************************************	DD 6"+	S/S	S KICKPLA	TE -	of 8. Th be 9. Ev sh to ind 10. Do red tw no on 11. Wh th 12. Th ha wh na on wh 11. Ins 12. All 13. Pa see 14. Lo 1. Providant b.	threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. 2010 CBC Section 1008.1.7. 2011 Ava. a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. 2011 Ava. a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. Section 1008.1.7. 2011 Ava. a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. 2011 Ava. a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. Section 1008.1.7. 2010 CBC Section 1008.1.7. Section 1	SCHEDULES Project number 13-5018
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & C LEVEL 1 LS ARE PROOM PRIOR TO 1 2 2 2 2	24 PLUMBIN LAVATOR PHONE SOUND STUCCO	CASEWORK EA CASEWORK SHES EXCEPT C/ & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS TINGUISHERS G: DESIGN BUIL ES, WATER CLOS CAL: DESIGN BU EAL FIXTURES SYSTEM SYSTEM	ARPET ESIVE LERS: DESIGN BUILT LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	—CLEAR TE —S.C. DOOR —UNDERSID —16"W x 8"H	EMPERED GLASS H.M. DOOR DE OF STRUCTU H LOUVER	**************************************	DD 6"+	S/S	S KICKPLA	TE -	of 8. Th be 9. Ev sh to ind 10. Do red tw no on 11. Wh the 12. Th ha wh na on wh 11. Ins 12. All 13. Pa see 14. Lo 1. Provida. b. c. d.	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". 2010 CBC Section 1008.1.7. erry required exit doorway shall be capable of opening at least 90 degrees, all hove a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 thesis in height. or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or sixting of the wrist to operate. Manually operated bolts or surface bolts are to peratise. The unlatching of any door or leaf shall not require more than e operating door open 90 degrees. e bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a elecihair footrest without creating a trap or hazardous condition. Where rrow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a elecihair footrest without creating a trap or hazardous condition. BOOR SIGNAGE NOTES NOTES NOTES CA CODES To TES To CA CODES de tactile exit signage at the following locations with the following words: Each grade level exterior exit door — "EXIT" Each exit door that leads directly to a grade level exterior exit by means of a stairway or ramp—"EXIT STAIR DOWN", "EXIT RAMP DOWN" "EXIT STAIR UP", OR "EXIT RAMP UP" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passageway— "EXIT ROUTE" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passageway—"EXIT ROUTE" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passageway—"EXIT ROUTE" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passagewa	SCHEDULES Project number 13-5018 Date 08/19/2 Drawn by
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & LEVEL 1 LS ARE PROOM PRIOR TO 1 2 2 2 2 2 2	22 PLUMBIN LAVATOR PHONE SOUND STUCCO	CASEWORK EA CASEWORK SHES EXCEPT CA & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSORI EQUIPMENTS EA EQUIPMENTS STEM INGS IC FIRE SPRINKL TINGUISHERS G: DESIGN BUIL ES, WATER CLOS CAL: DESIGN BU EAL FIXTURES SYSTEM M	ARPET ESIVE LERS: DESIGN BUILD LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)		,-0,, L, -0,,	CC EE	—CLEAR TEM —S.C. DOOR —UNDERSIE —16"W x 8"H	EMPERED GLASS H.M. DOOR DE OF STRUCTU H LOUVER	**************************************	DD 6"+	S/S	S KICKPLA	TE -	9. Even should be should b	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". Section 1008.1.7. 2010 CBC Section 1008.1.7.	SCHEDULES Project number 13-5018 Date 08/19/20 Drawn by Checked by
CP CARPET TILE CP O1 CARPET SF RECESSED ENTRANCE FLOOR MAT PT O1 PORCELAIN TILE P WHITE PAINT P TBD TBD P TBD TBD TBD	PATCRAFT TBD PATCRAFT TBD TBD TBD TBD CROSSVILLE TBD	18x18	 METAL COLUMNS: SEM DOORS: SEMI-GLOSS DOOR FRAMES: PAINT SEMI-GLOSS ENAMEL GYP. BD. CEILING: S ALL WORK & STORAG FINISH MATERIAL SHAL REFLECTANCE VALUE AND CEILINGS AT RESPAINTED SMOOTH WITH INSTALL GYP.BD. LEVE GYP.BD. LEVEL 4 FOR (E) WALL/CEILING/EXEREPAIRED & LEVELED APPEARANCE PRIOR T WATER RESISTANT FIBERGL REQUIRED BEHIND ALL SINFINISH SCHEDULE FOR HE SAMPLES: G.C. TO PROVIDE SAMPLES INSTALLATION CERAMIC, PORCELAIN V.C.T IF APPLICABLE 	MI-GLOSS OIL ENAMEL SAME COLOR AS WALL W/ SEMI-GLOSS SE AREAS: SEMI-GLOSS ENAM LL BE A LIGHT COLOR WITH A OF 70% OR GREATER. ALL STROOMS AND UTILITY ROOM H NO TEXTURE. EL 5 FOR SEMI-GLOSS PAINT R SATIN PAINT POSED STRUCTURE SHALL BE AS NEEDED FOR SMOOTH & TO PAINTING LASS REINFORCED PANEL WAL NKS & MOP SINKS; REFER TO EIGHT OF F.R.P.	EL. A WALLS TO BE & LEVEL 1 LS ARE PROOM PRIOR TO 1 2 2 2 2 2 2	22 PLUMBIN LAVATOR PHONE SOUND STUCCO	CASEWORK EA CASEWORK SHES EXCEPT C/ & CARPET ADHE SIGNAGE R SIGNAGE ROOM ACCESSOR EQUIPMENTS EA EQUIPMENTS TINGUISHERS G: DESIGN BUIL ES, WATER CLOS CAL: DESIGN BU EAL FIXTURES SYSTEM SYSTEM	ARPET ESIVE LERS: DESIGN BUILD LD INCL. (N) H/W SETS TO REPLACE (& DRINKING FOUNTAINS; (N)			CC EE	—CLEAR TEM —S.C. DOOR —UNDERSIE —16"W x 8"H	EMPERED GLASS H.M. DOOR DE OF STRUCTU H LOUVER	**************************************	DD 6"+	S/S	S KICKPLA	TE -	9. Events to incomplete the second of the se	e threshold shall be no higher than 1/2" above the floor. The edge to be veled with a slope not greater than 1 in 2, if more than 1/4". 2010 CBC Section 1008.1.7. erry required exit doorway shall be capable of opening at least 90 degrees, all have a minimum clear opening of 32 inches, and shall be of a size as permit the installation of a door not less than 3 feet in width and 6 feet 8 thesis in height. Or handles, pulls, latches, locks, and other operating devices on doors quired to be accessible shall not require tight grasping, tight pinching or siting of the wrist to operate. Manually operated bolts or surface bolts are to permitted. The unlatching of any door or leaf shall not require more than e operating. The installed, doorways shall have a minimum clear opening of 32 inches with e door open 90 degrees. The bottom 10 inches of all doors except automatic and sliding doors shall we a smooth, uninterrupted surface to allow the door to be opened by a elecihair footnest without creating a trap or hazardous condition. Where rrow frame doors are used, a 10 inch high smooth panel shall be installed the push side of the door which will allow the door to be opened by a elecihair footnest without creating a trap or hazardous condition. Botta rodent proofing at all exterior doors Full—height exterior & restroom doors shall be self closing. The proofing of all exterior doors and trin the field, color to match walls, use mi-gloss paint on doors and trin ckset by schlage or equal DOOR SIGNAGE NOTES NOTES CA CODES The detail exit signage at the following locations with the following words: Each exit door that leads directly to a grade level exterior exit by means of a stairway or ramp—"EXIT STAIR DOWN", "EXIT RAMP DOWN" "EXIT STAIR UP", OR "EXIT RAMP UP" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passageway—"EXIT ROUTE" Each exit door that leads directly to a grade level exterior exit by means of an exit enclosure or an exit passageway—"EXIT	SCHEDULES Project number 13-5018 Date 08/19/2 Drawn by

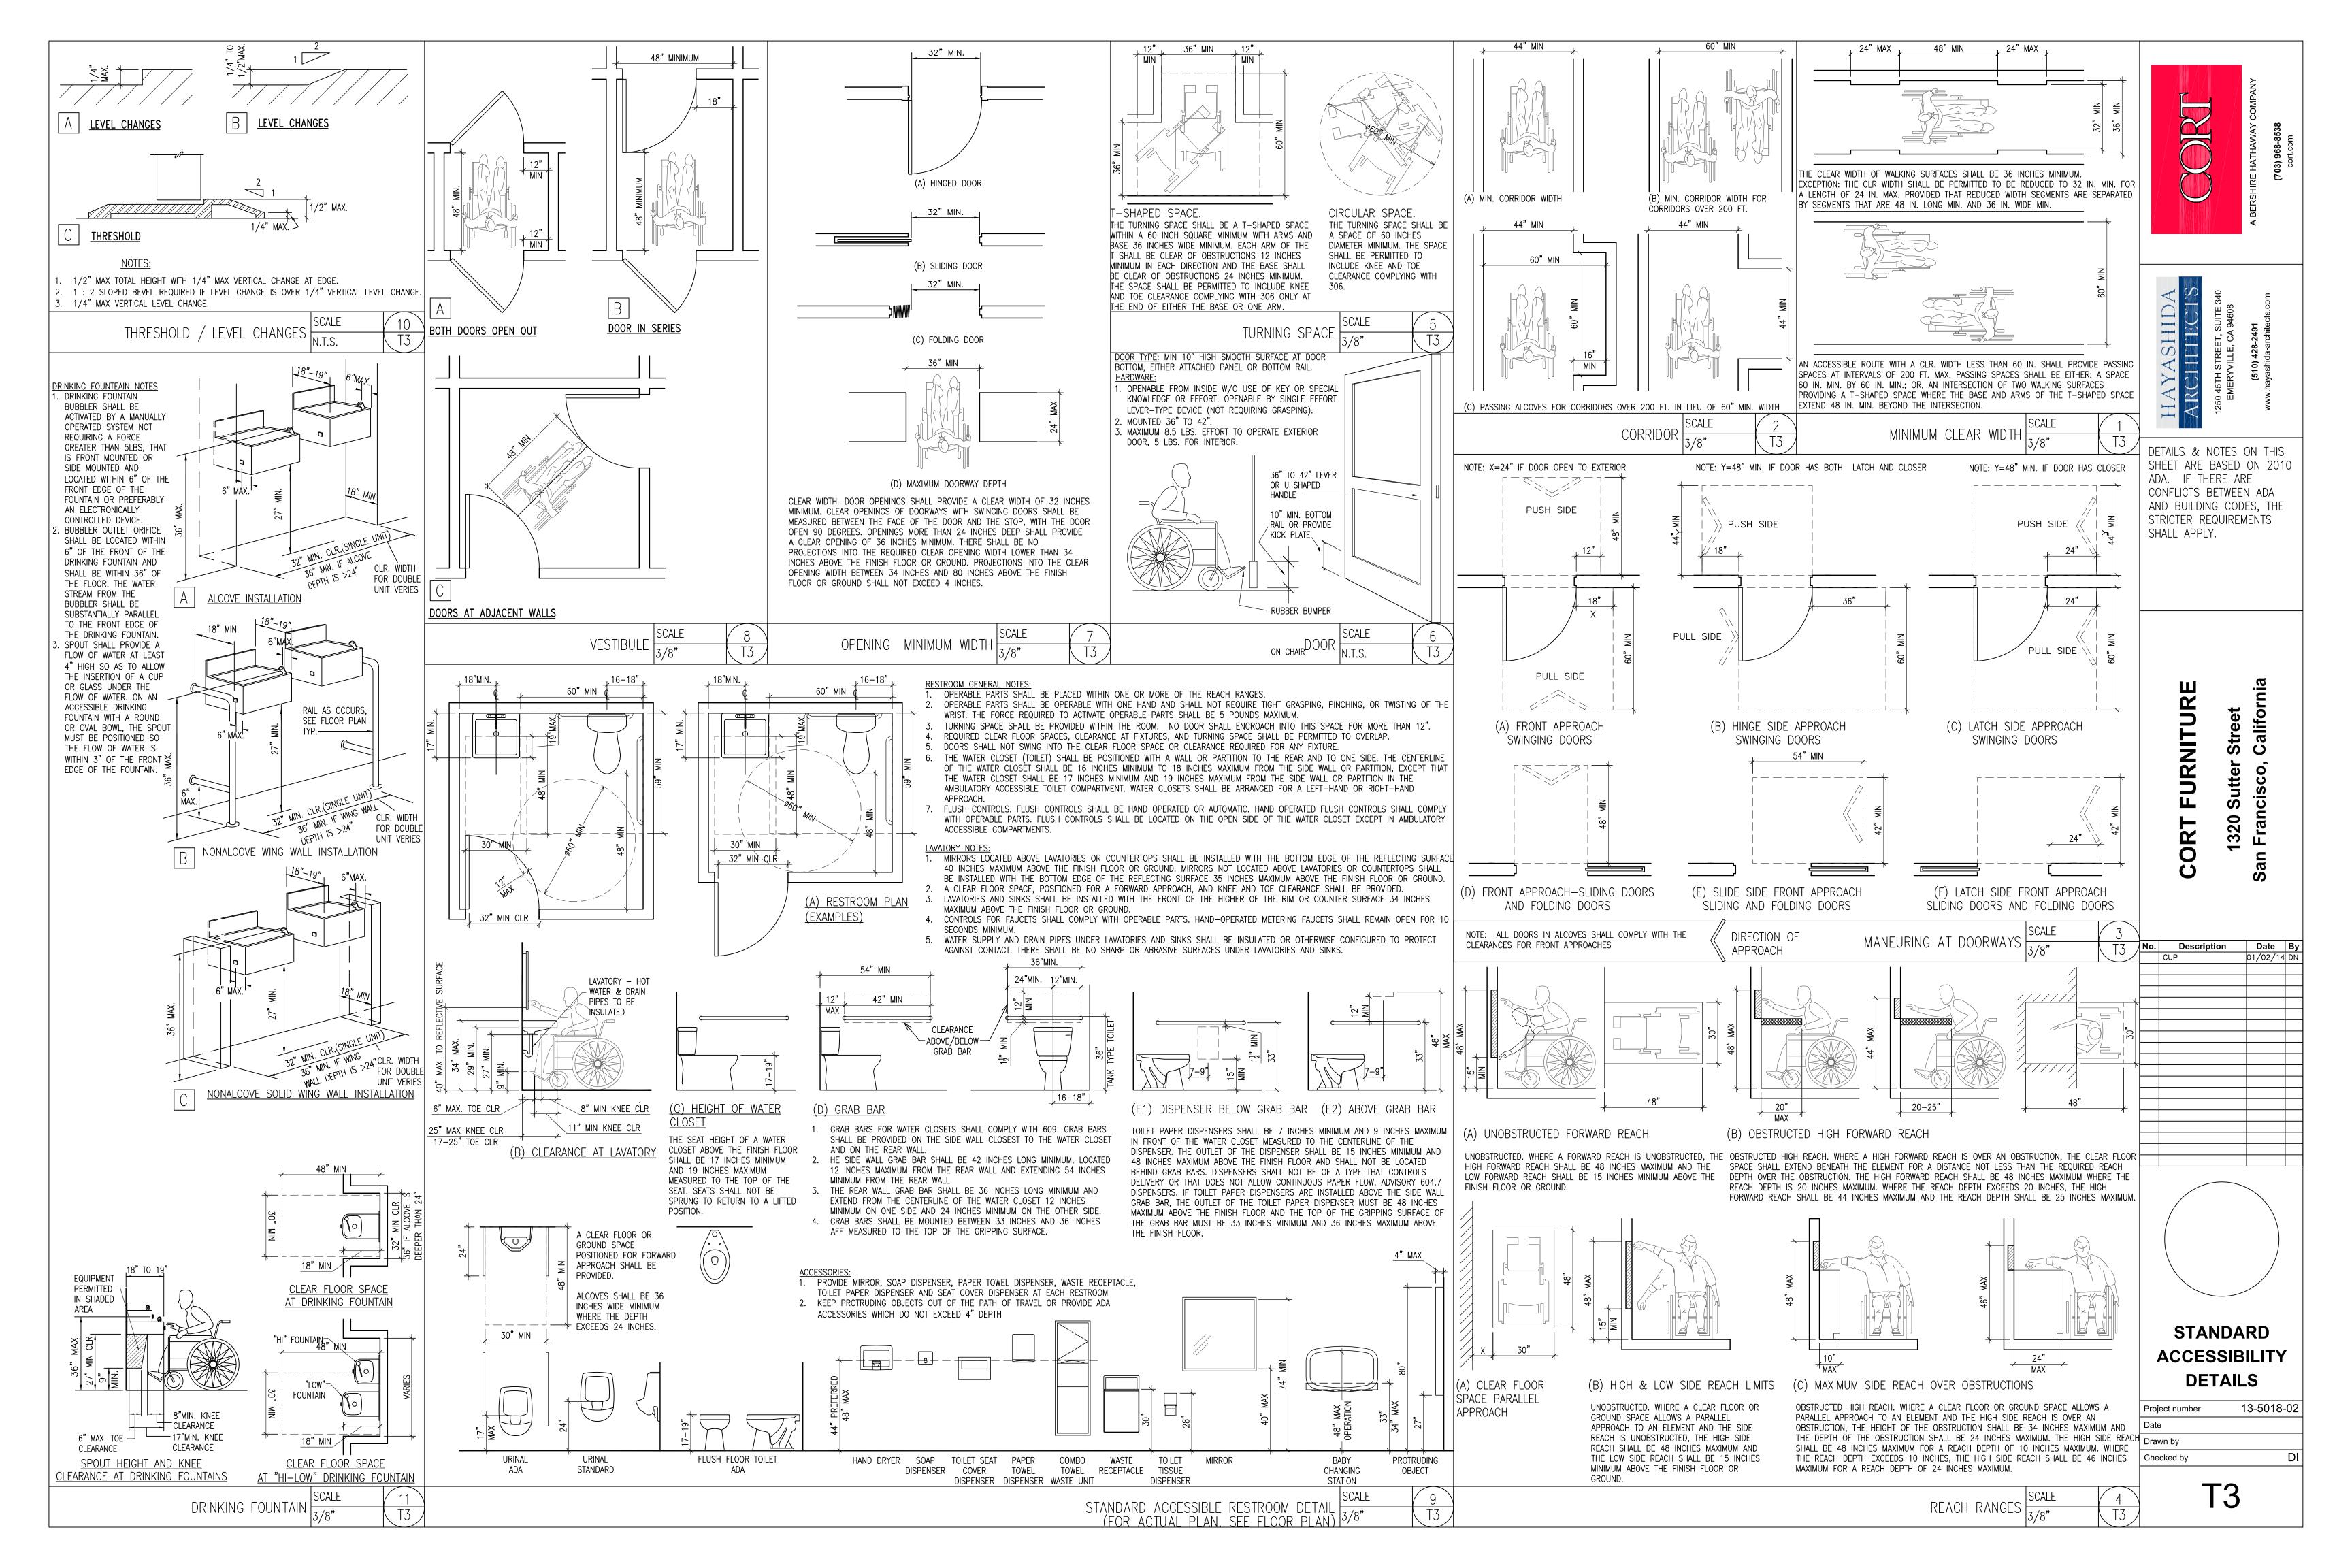

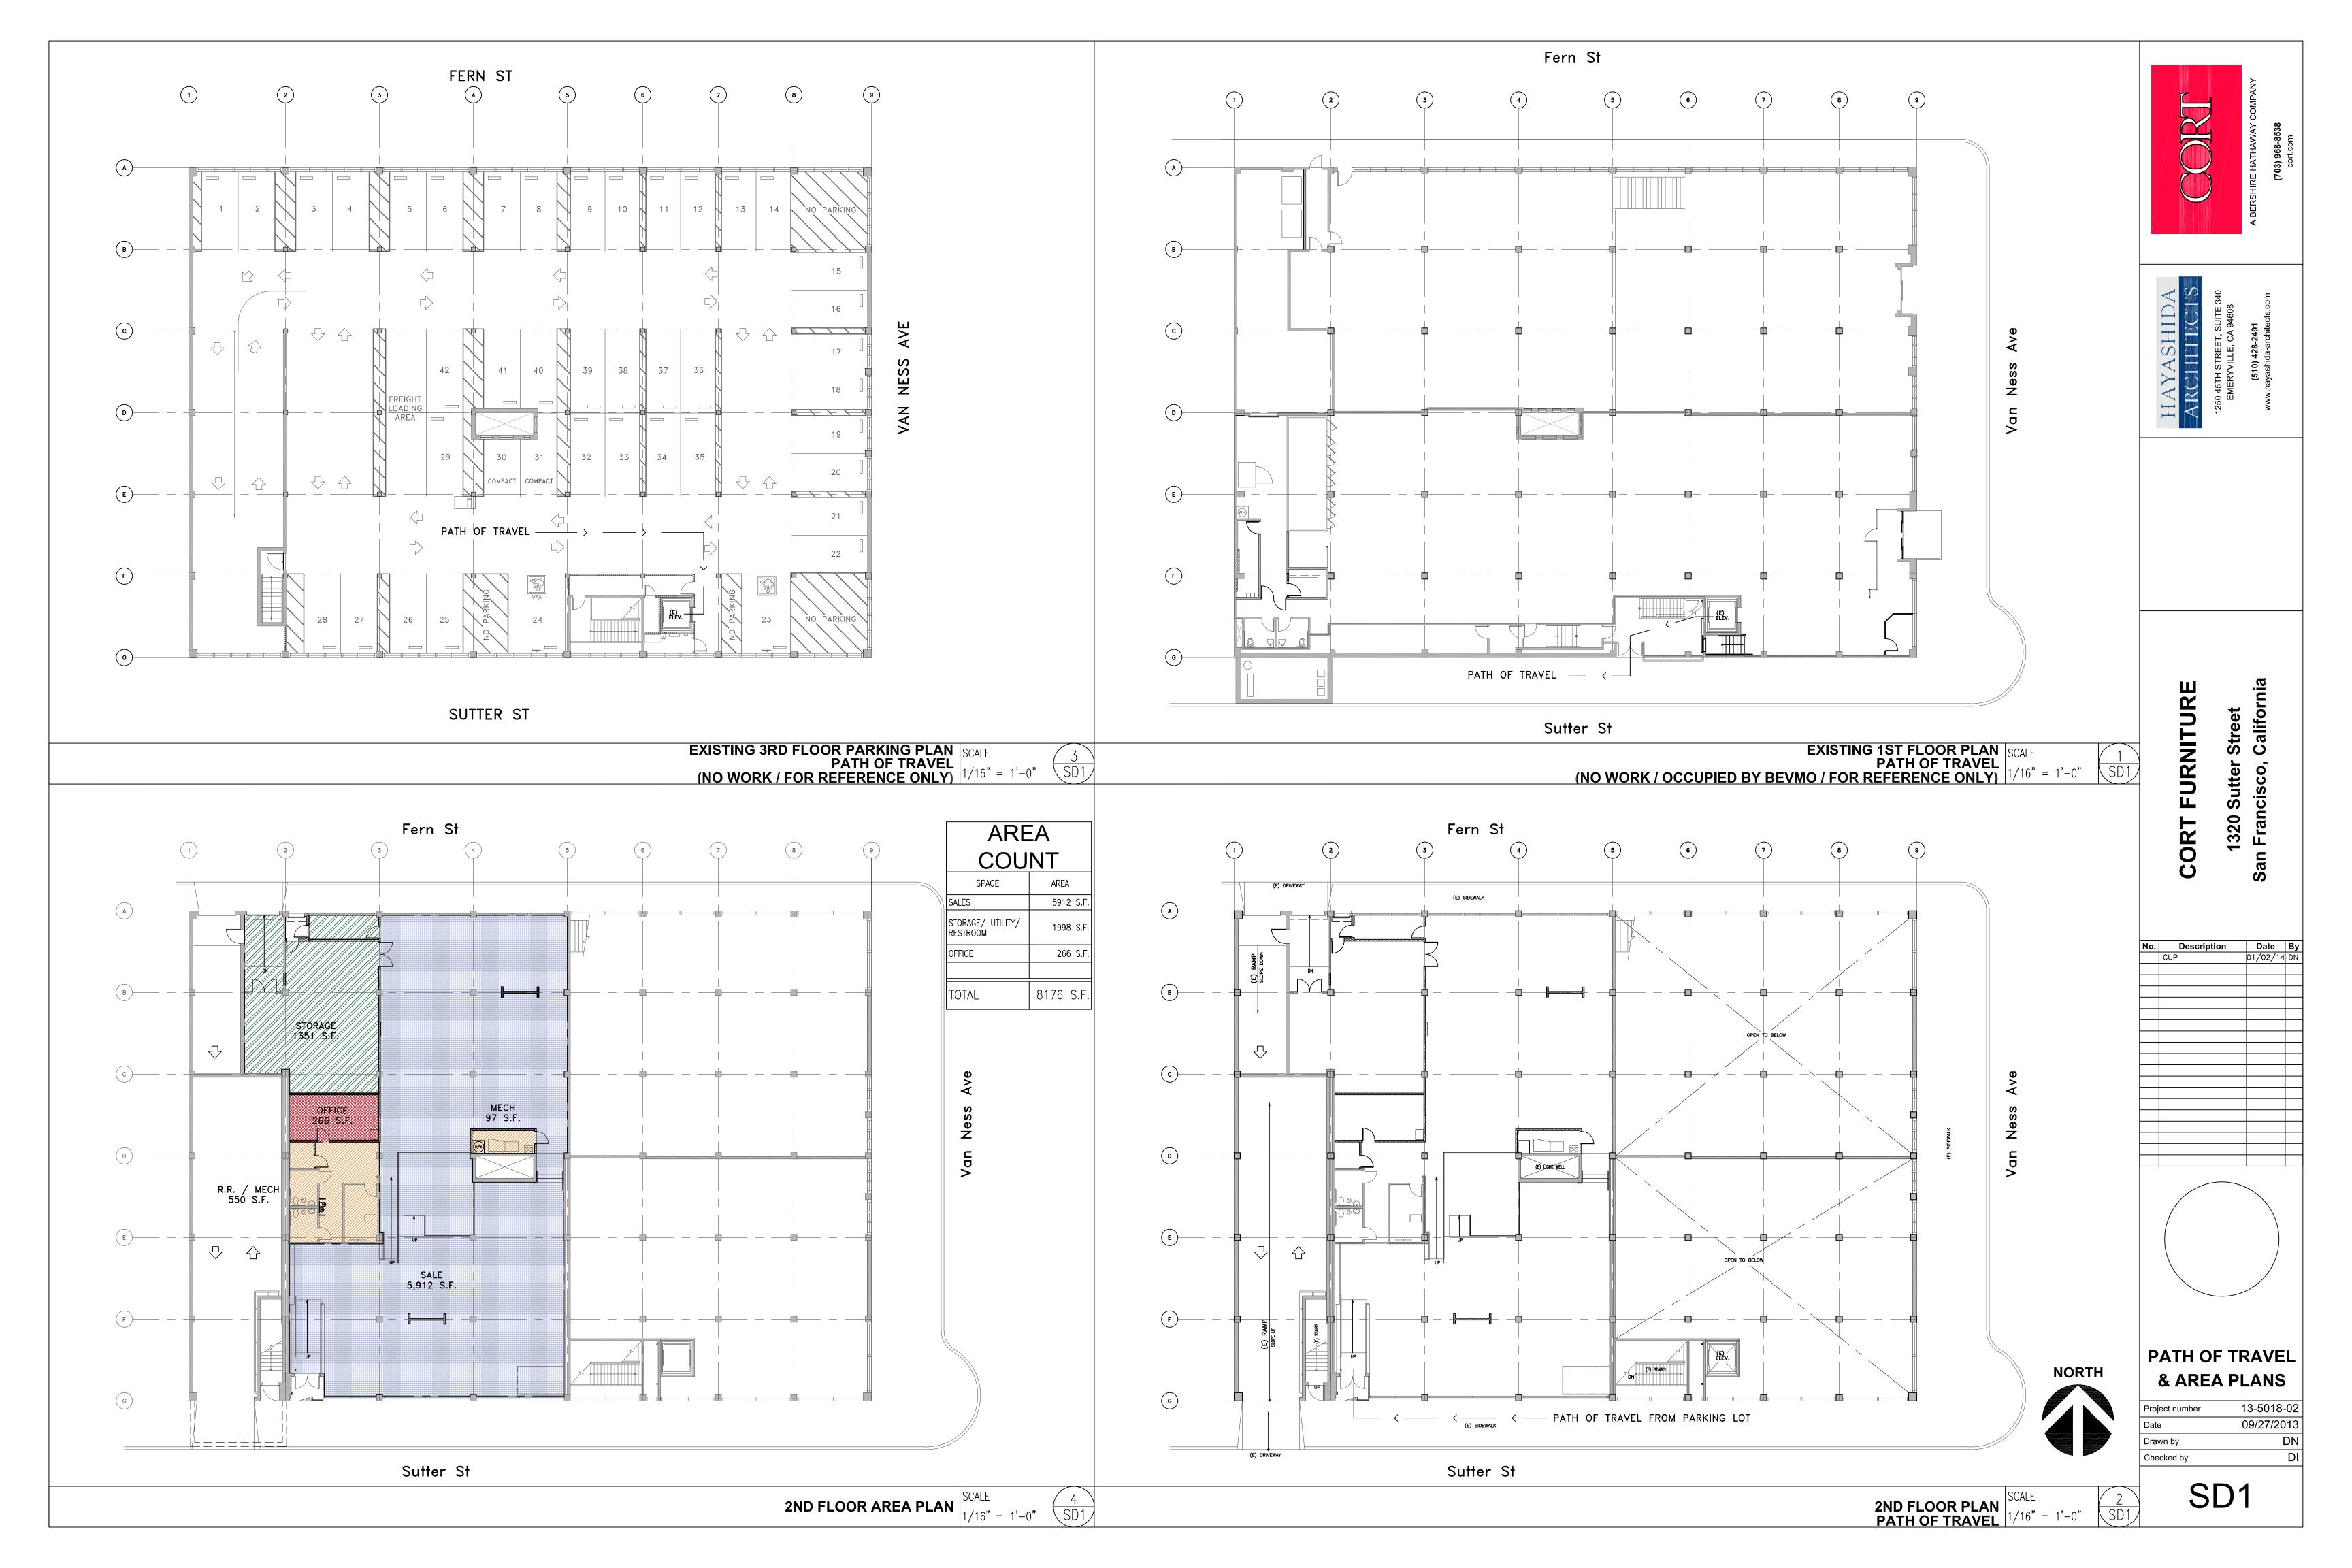


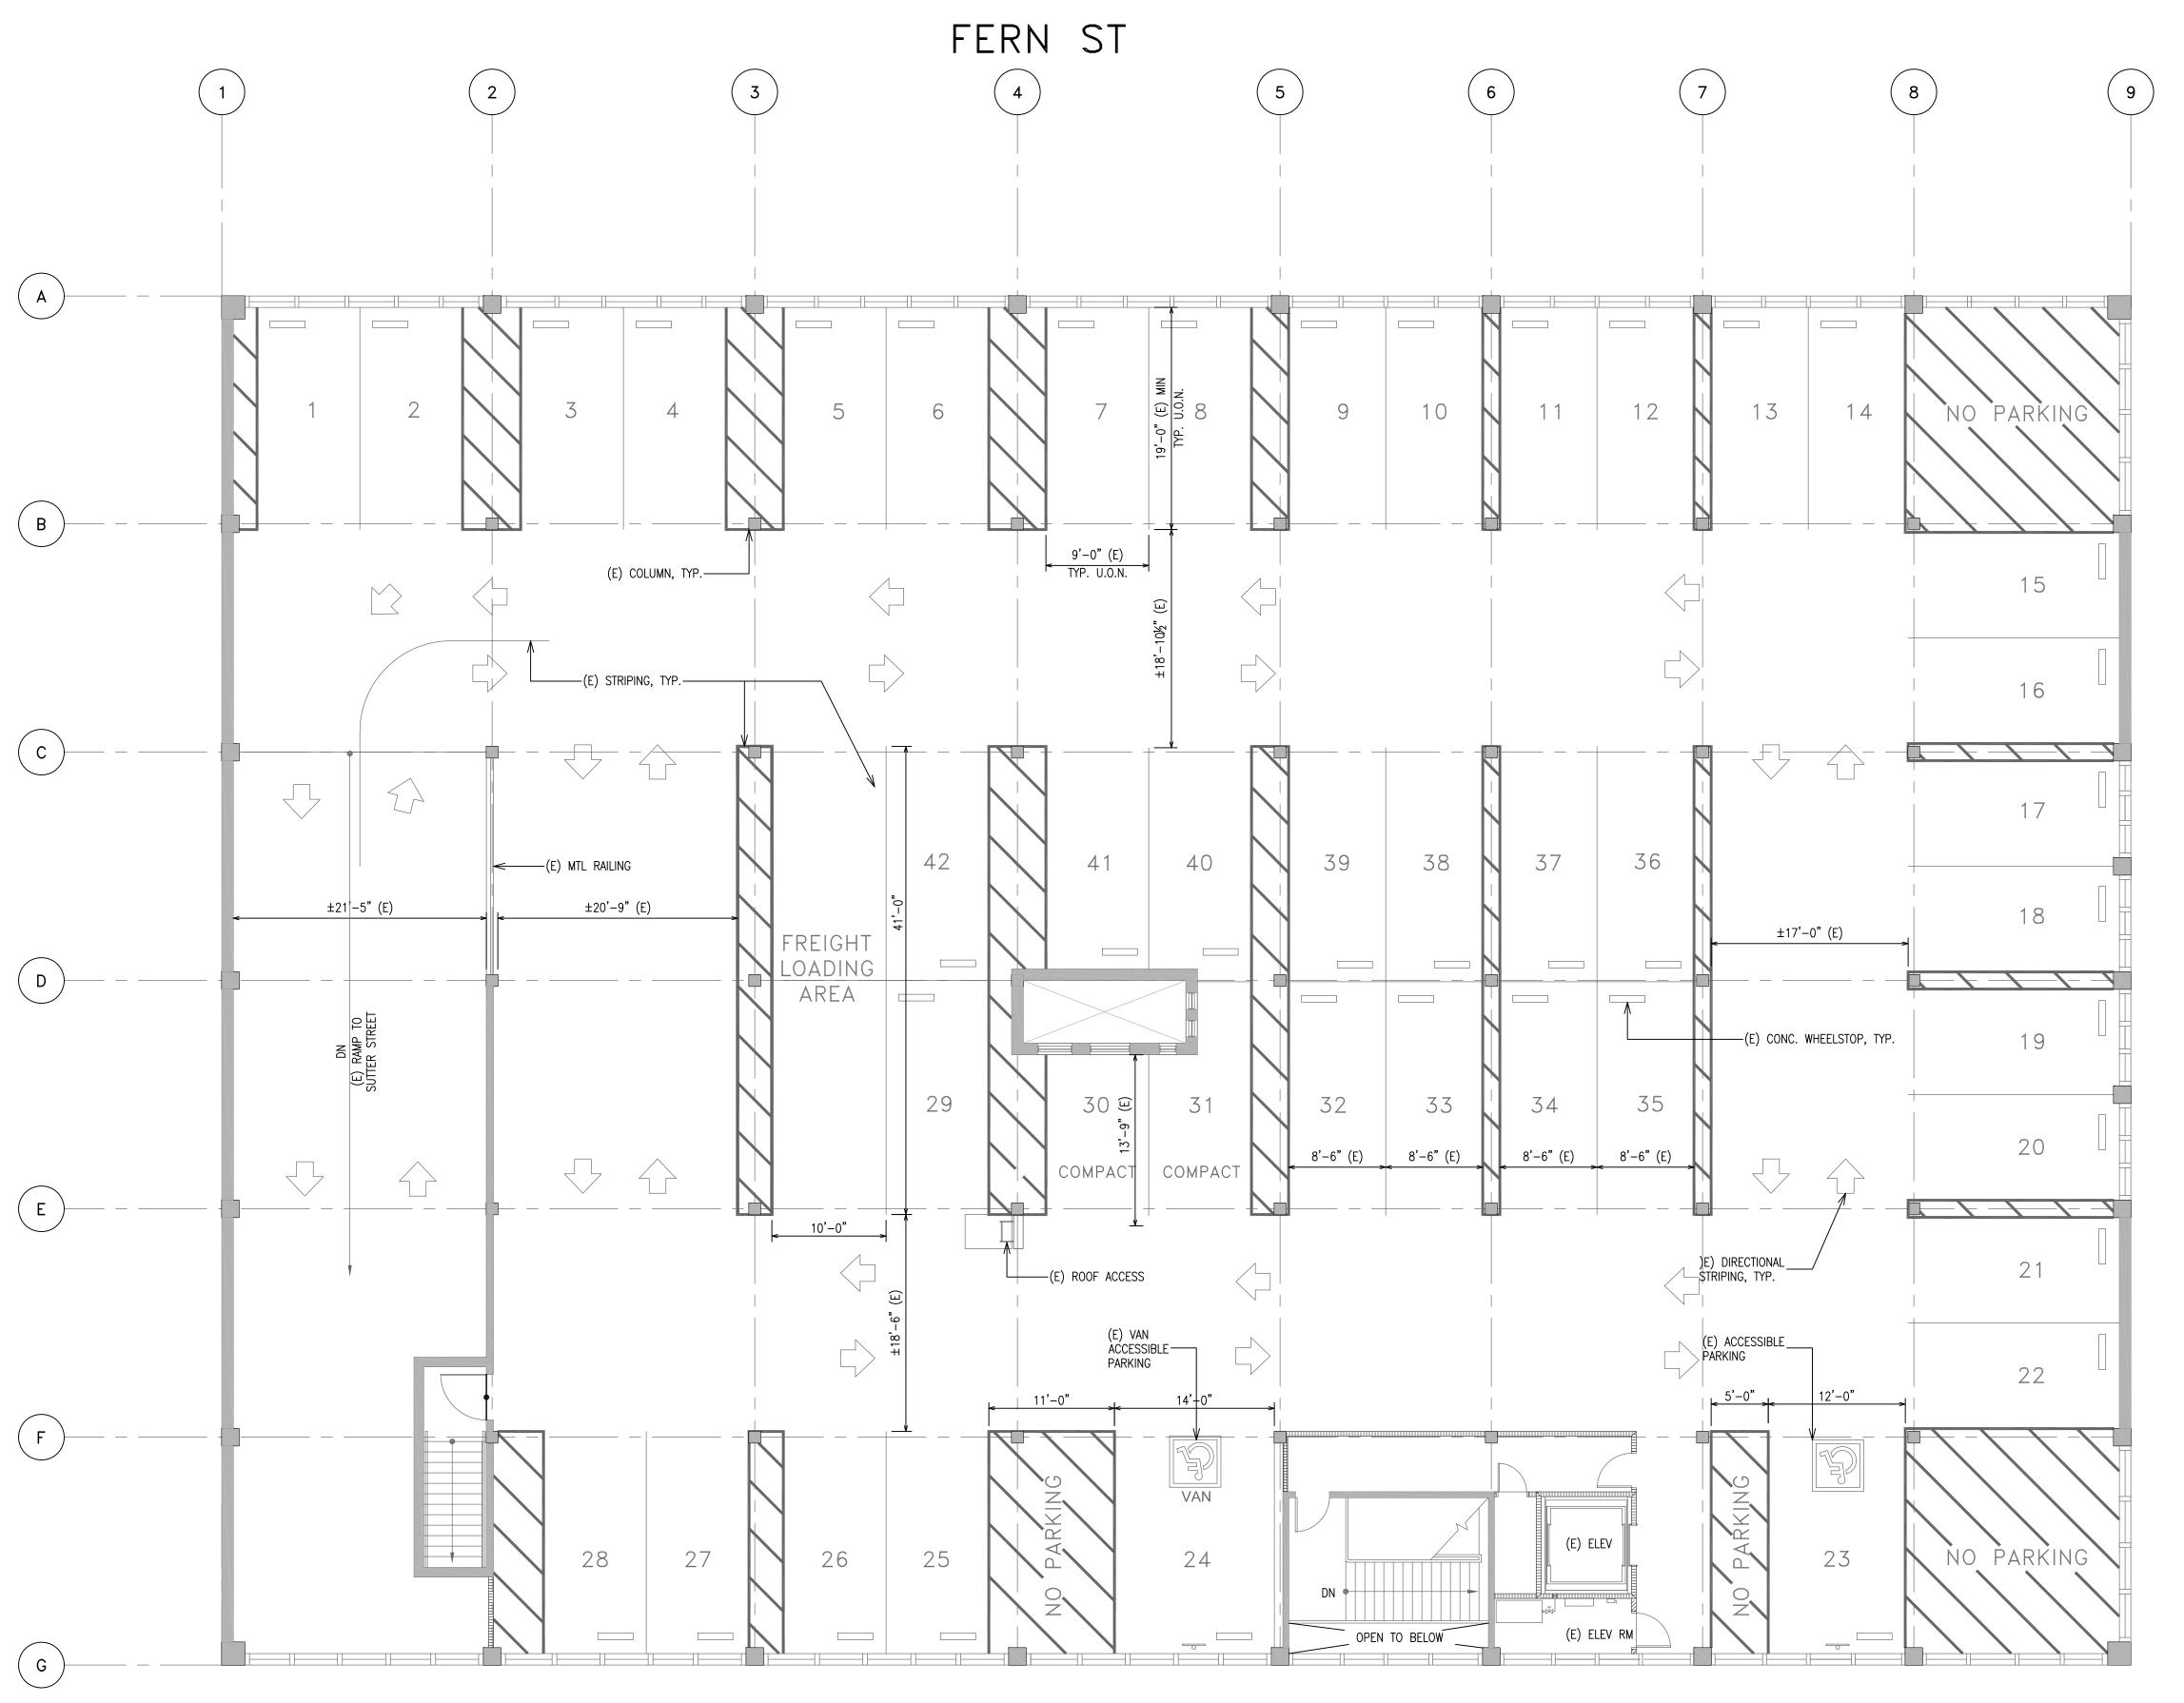

VAN NESS AVE

PARKIN	1G	
COUN	Т	
(E) REGULAR PARKING	38	STALL
(E) COMPACT PARKING	2	STALL
(E) ACCESSIBLE PARKING	2	STALL
(E) STREET PARKING AT SUTTER ST AT VAN NESS ST	_	STALL STALL
TOTAL (E) PARKING	51	STALL

SUTTER ST



ARCHIERCIES

1250 45TH STREET, SUITE 340
EMERYVILLE, CA 94608

(510) 428-2491

CORT FURNITURE
1320 Sutter Street
San Francisco, California

No.	Description	Date	В
	CUP	01/02/14	DN
		_	


PARKING PLAN (FOR REFERENCE)


 Project number
 13-5018-02


 Date
 11/06/13


 Drawn by
 DN


 Checked by
 DI

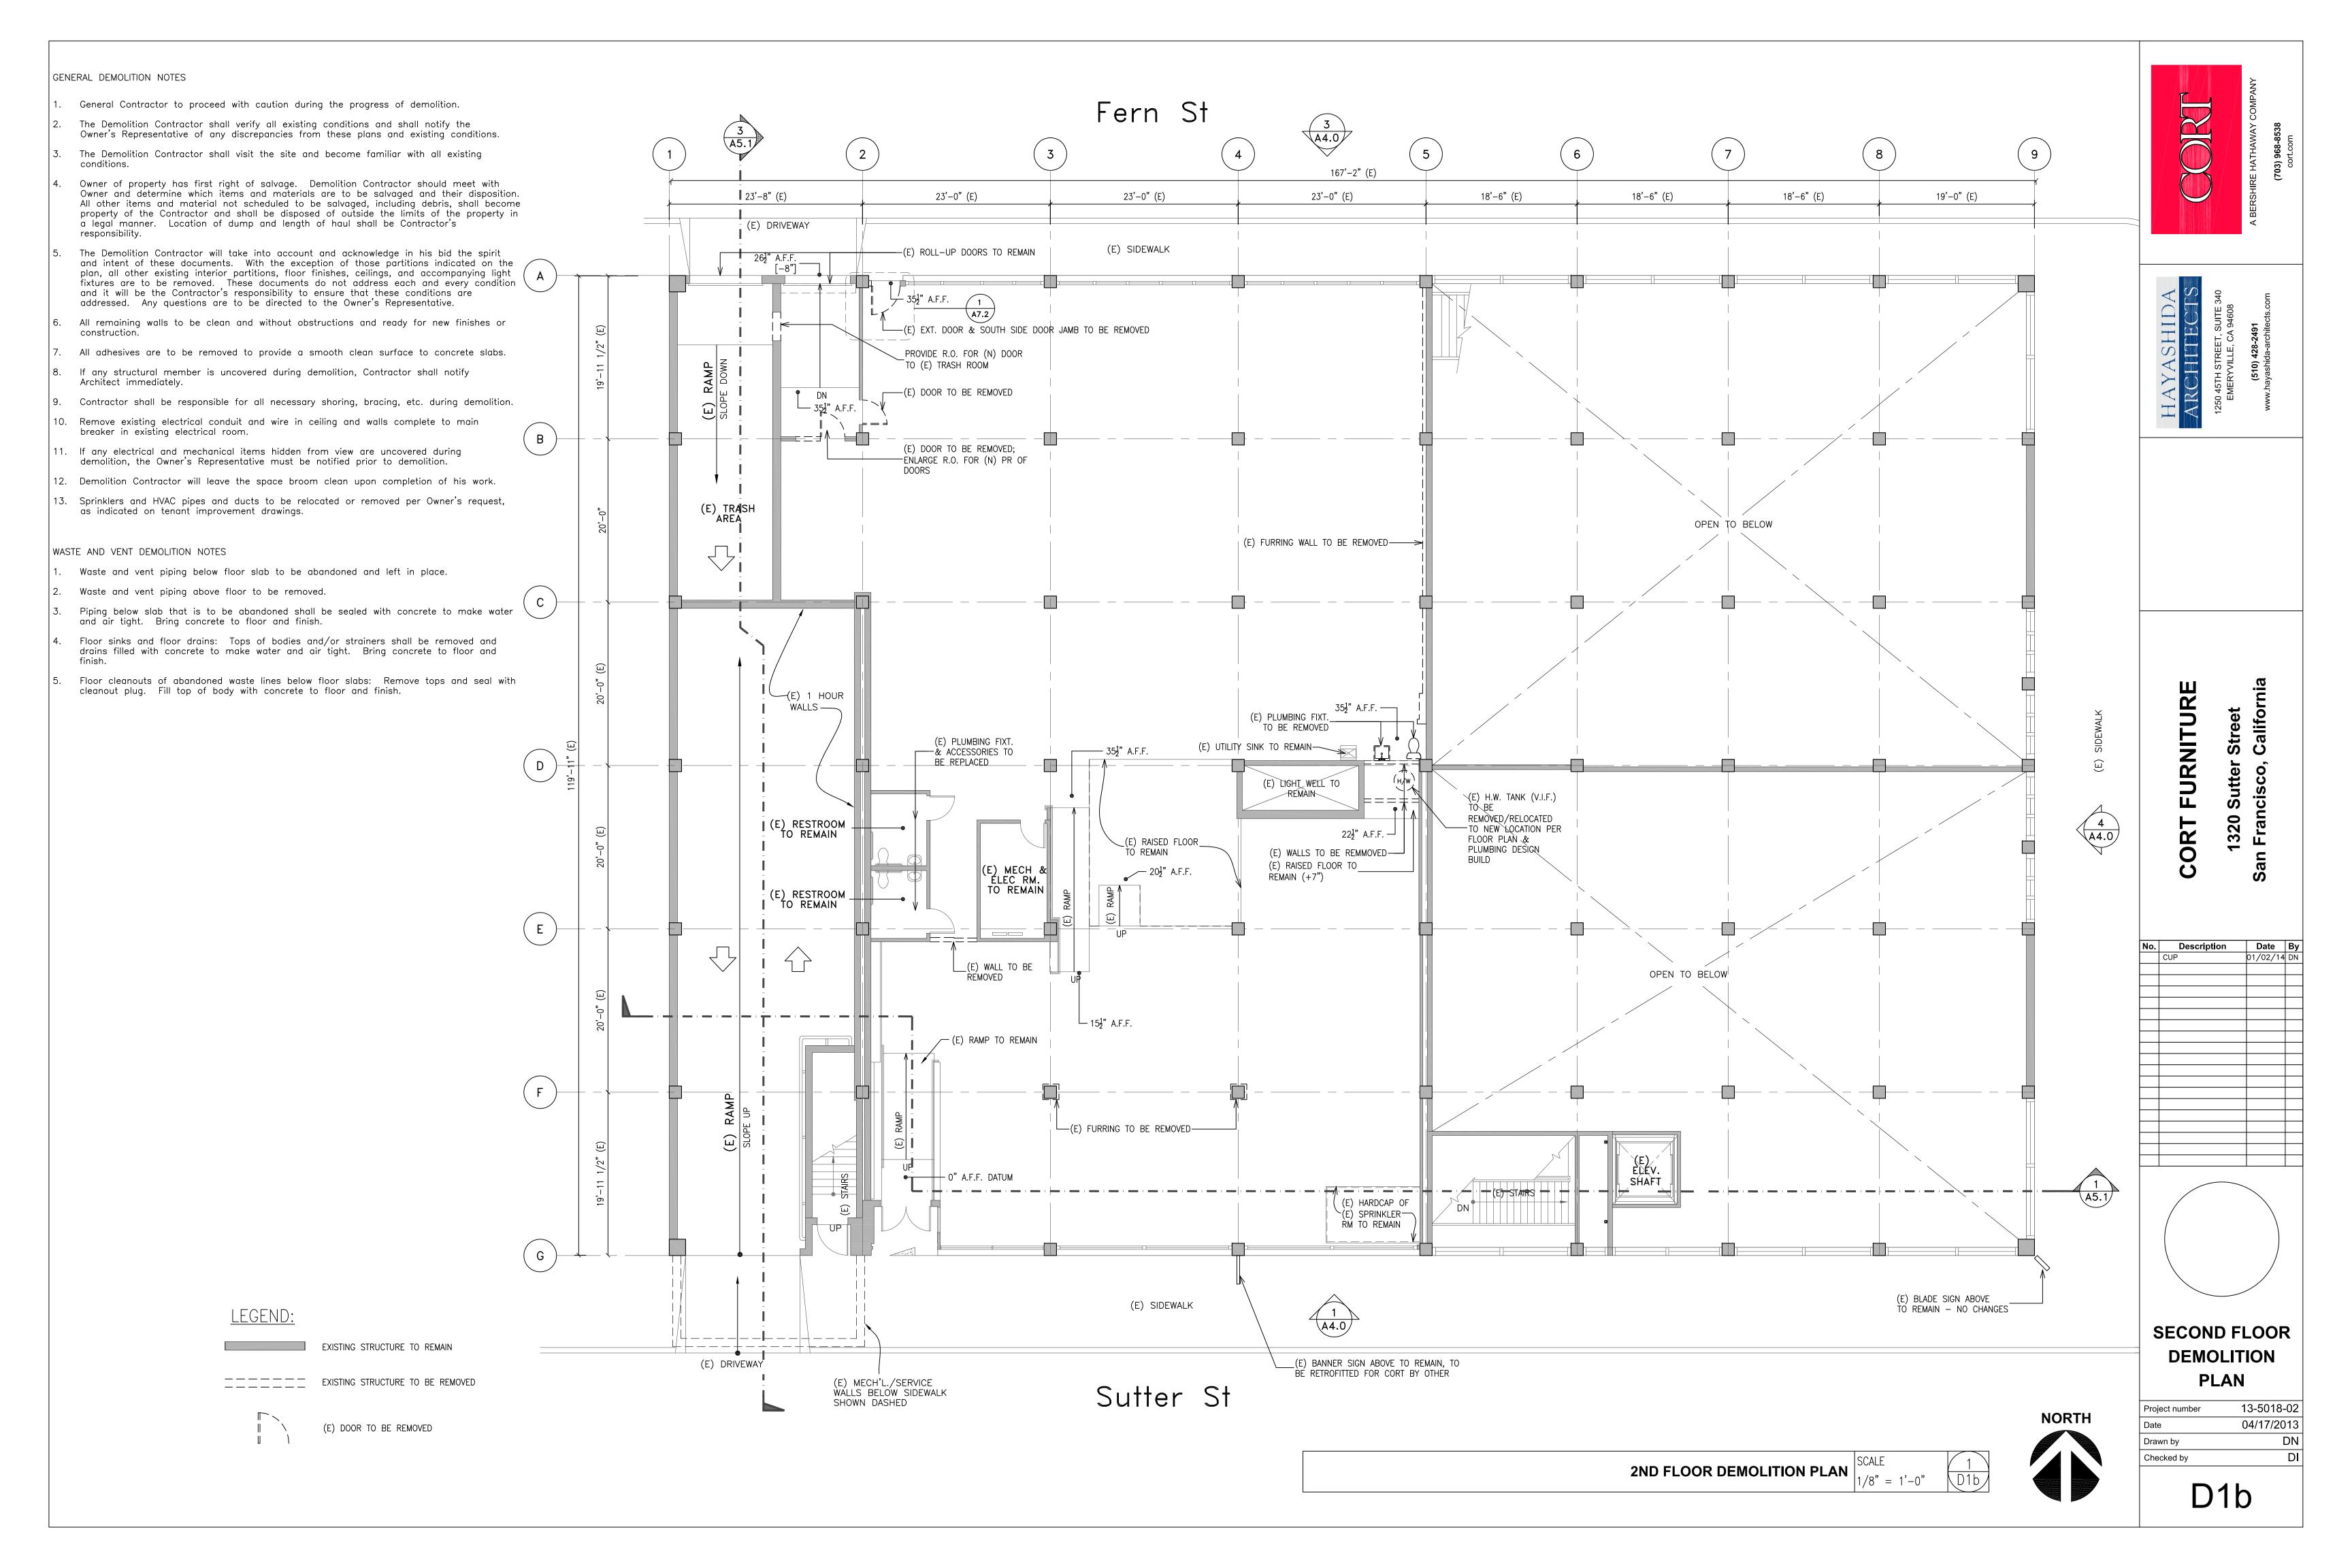

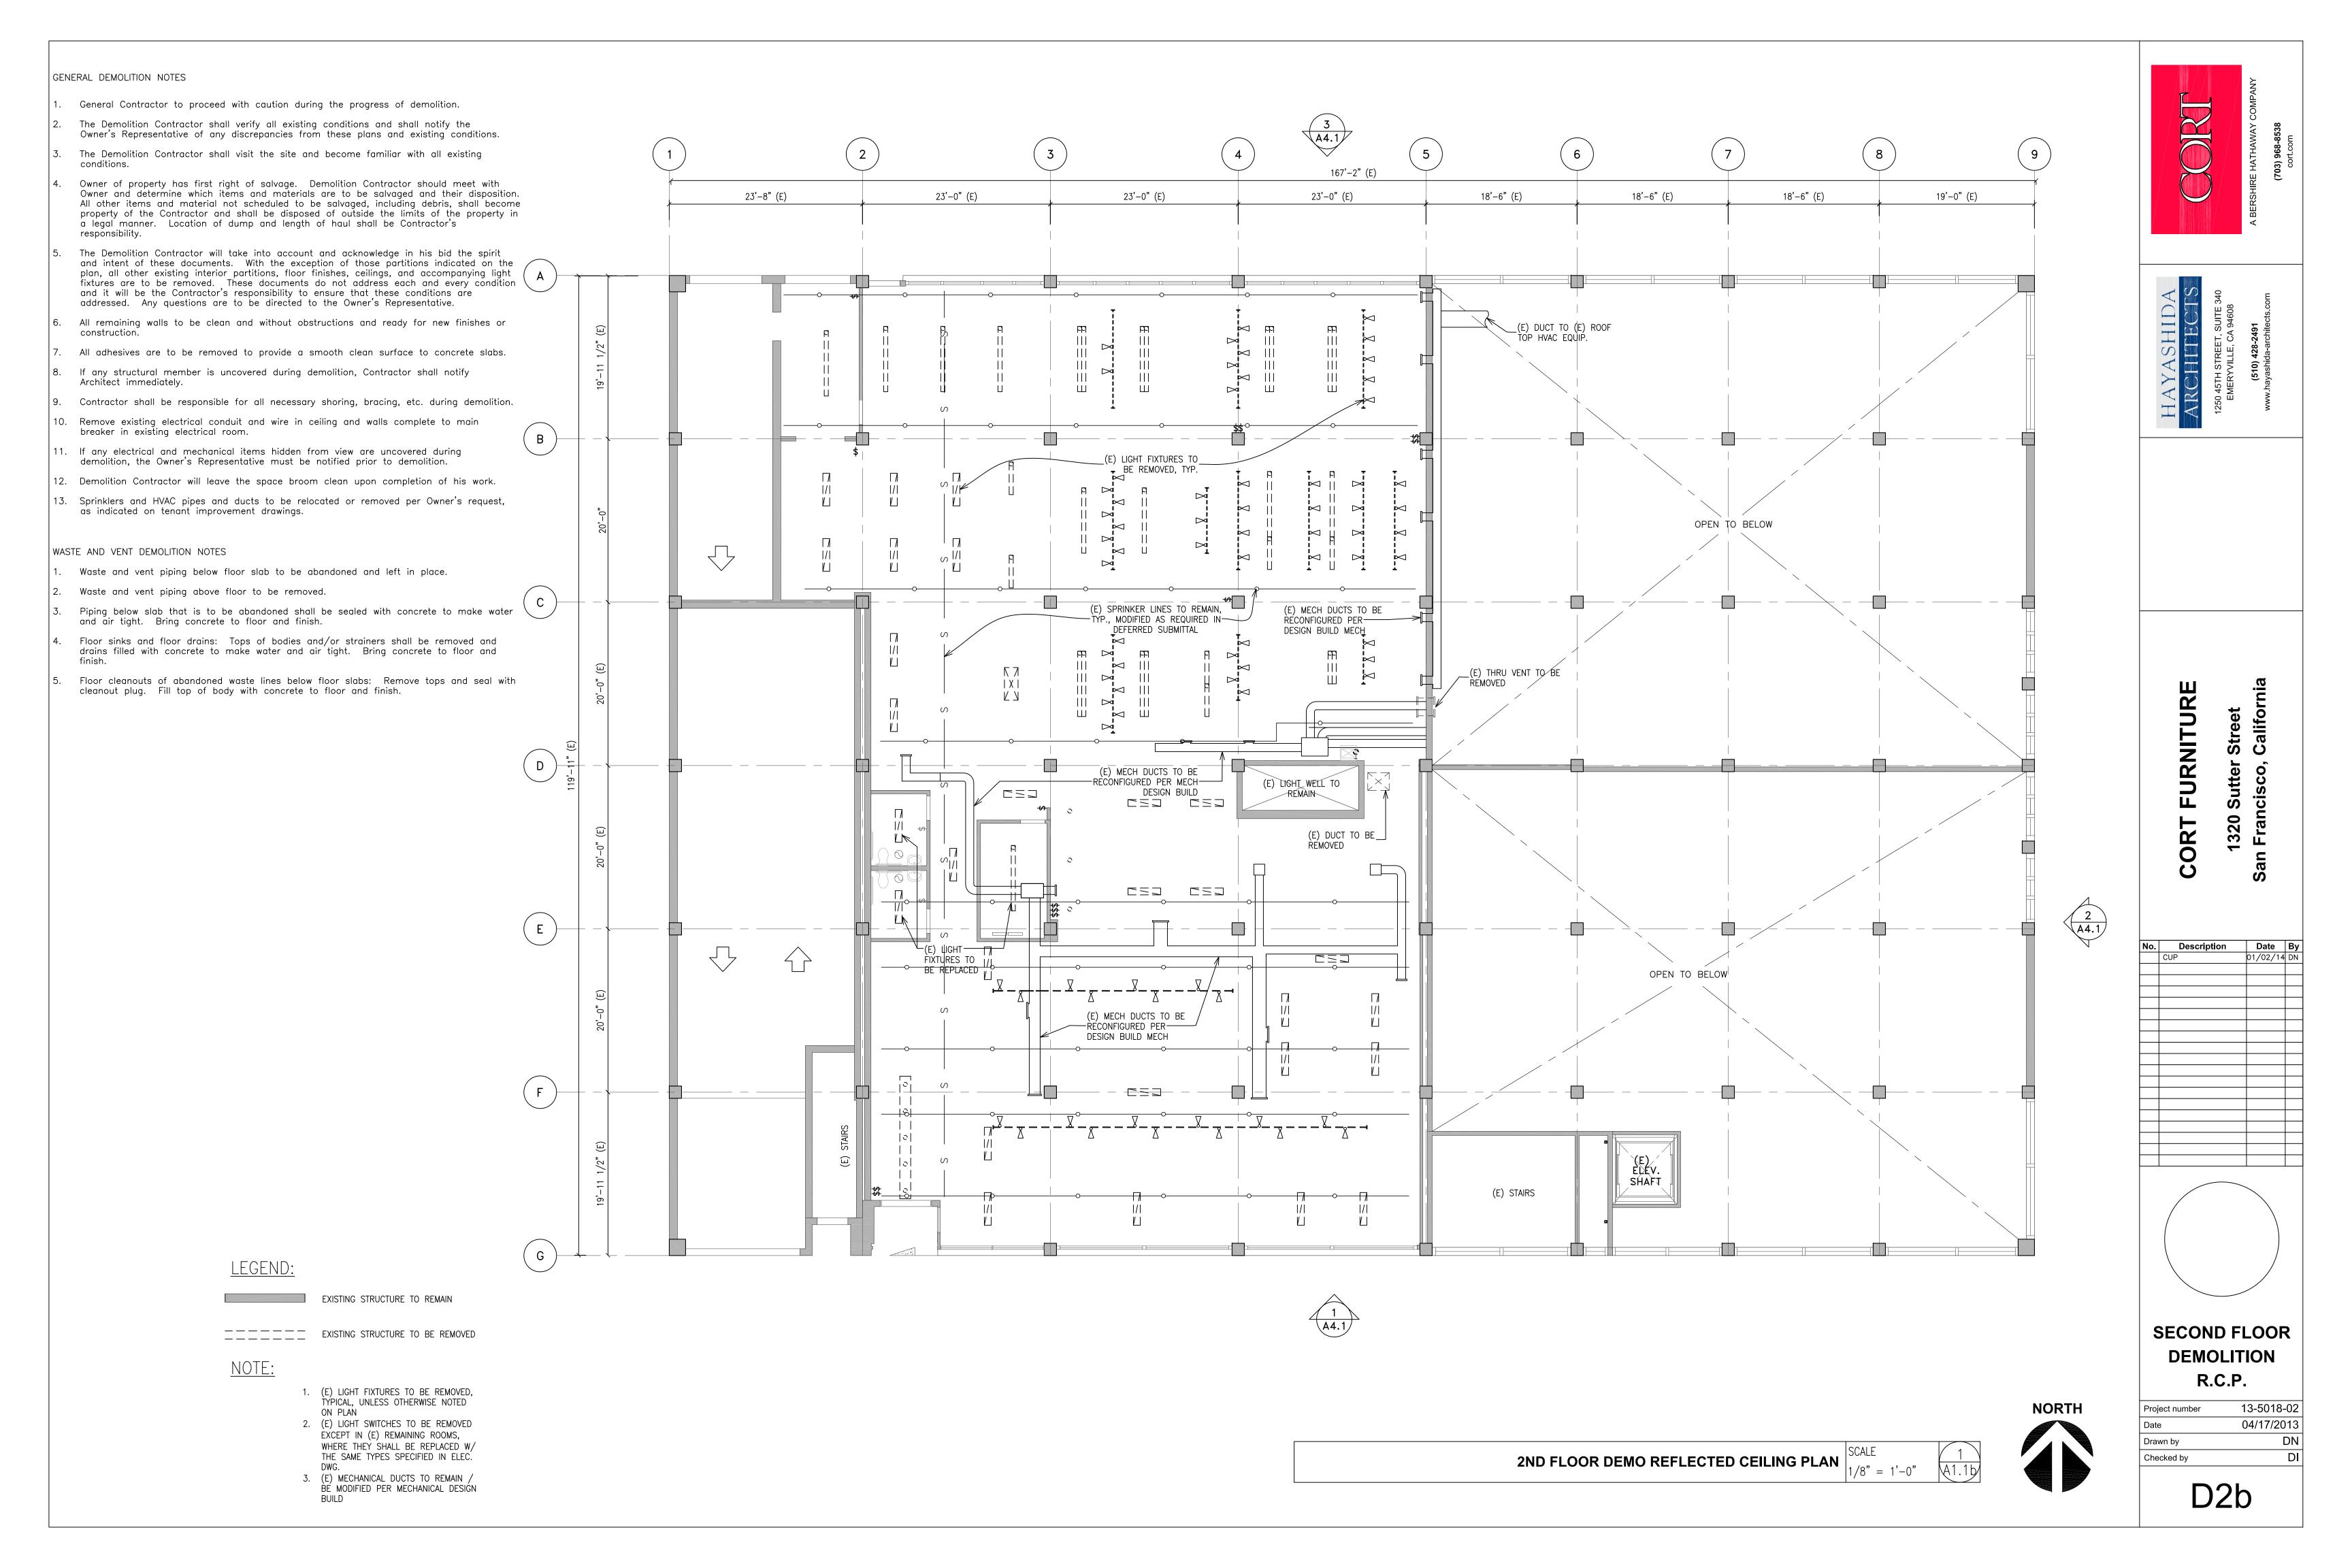


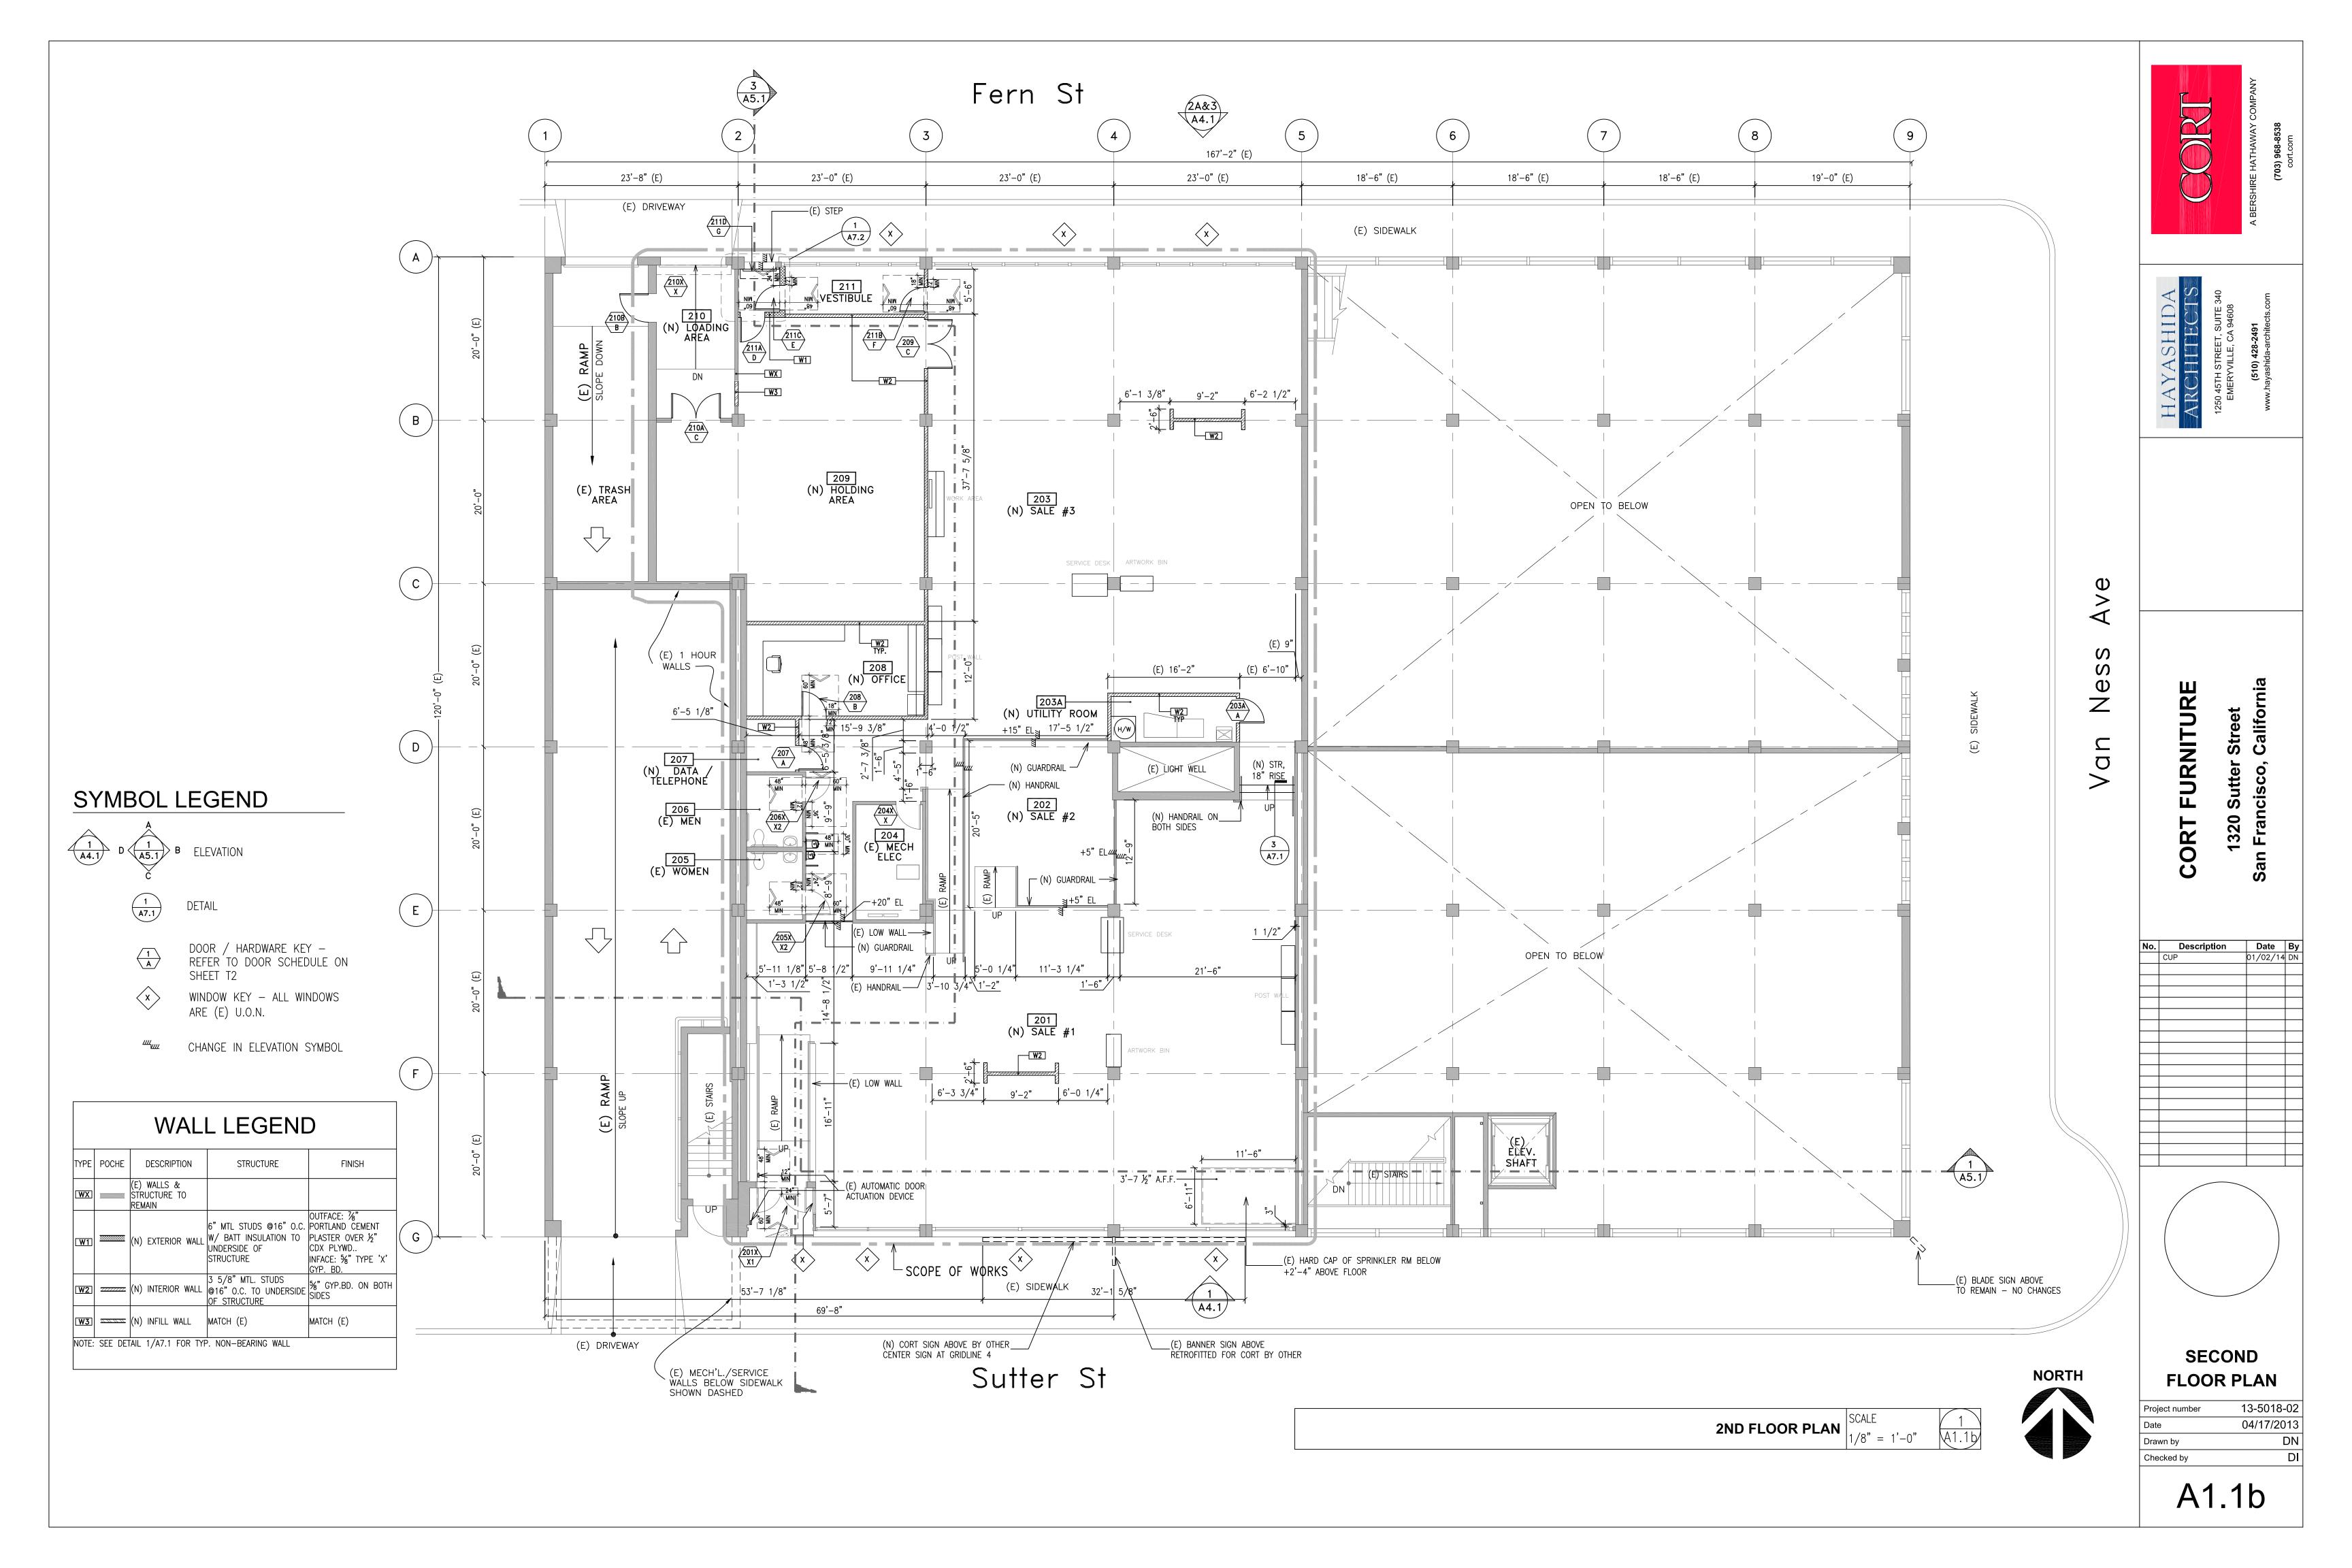


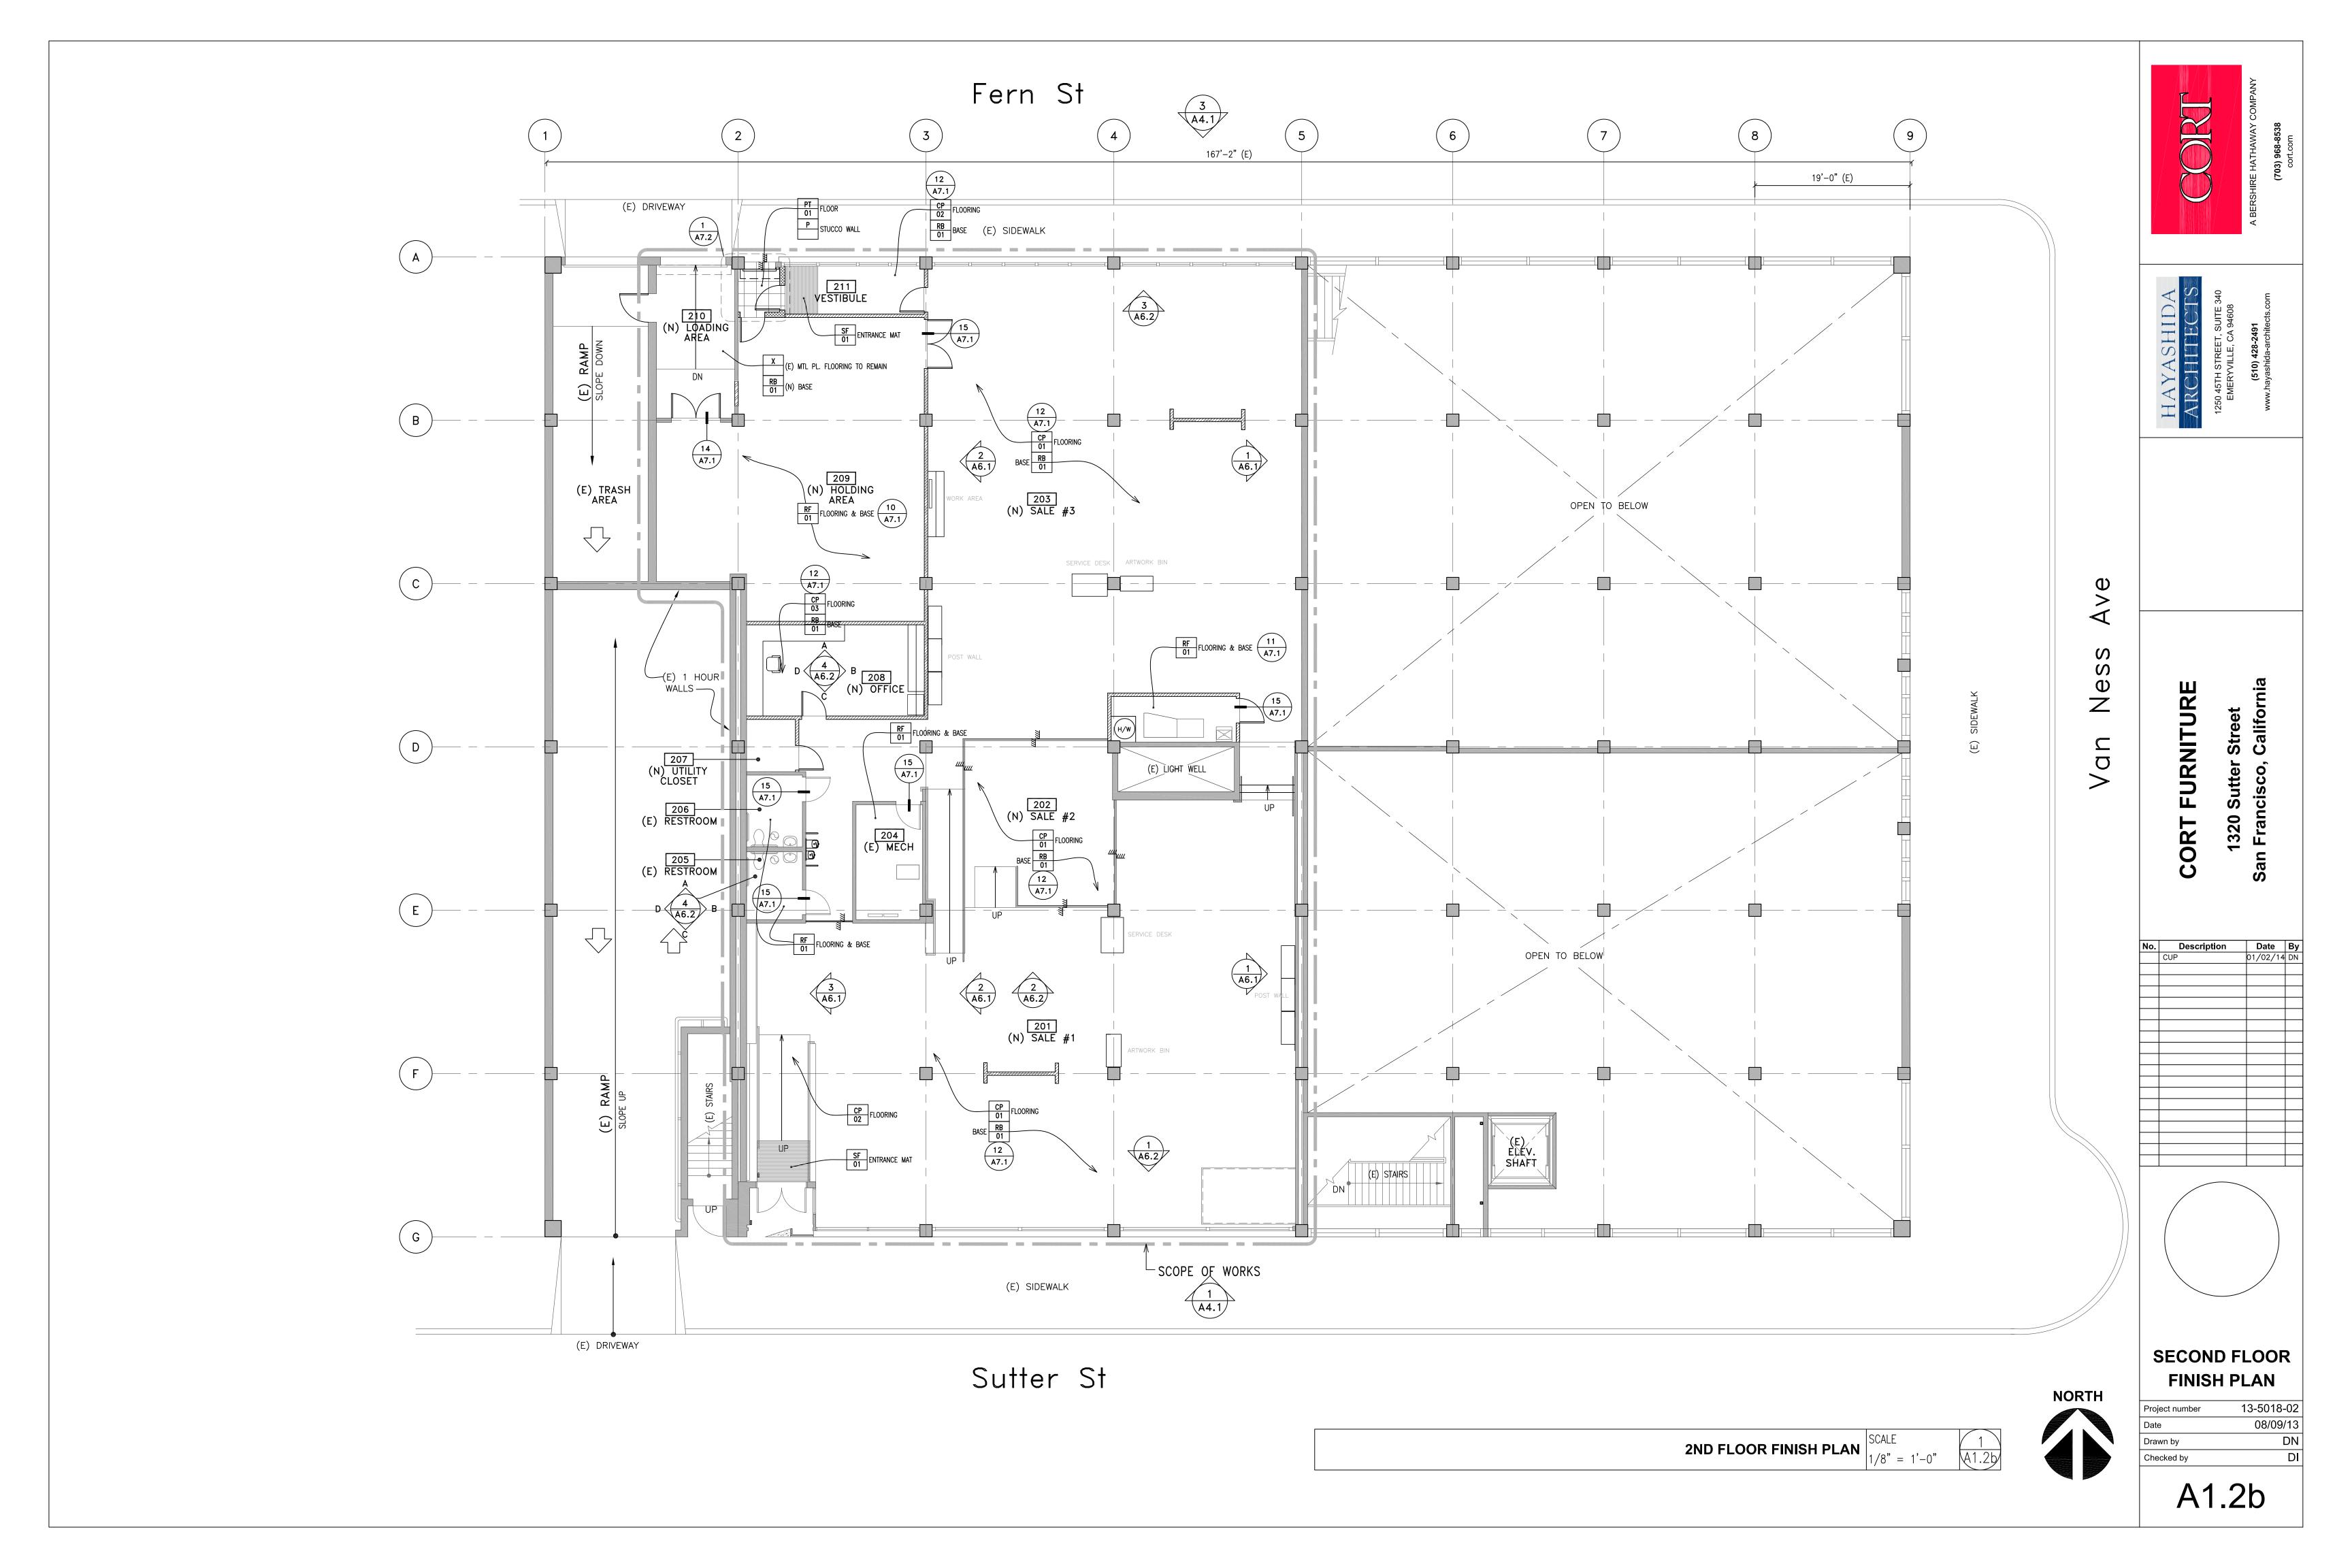


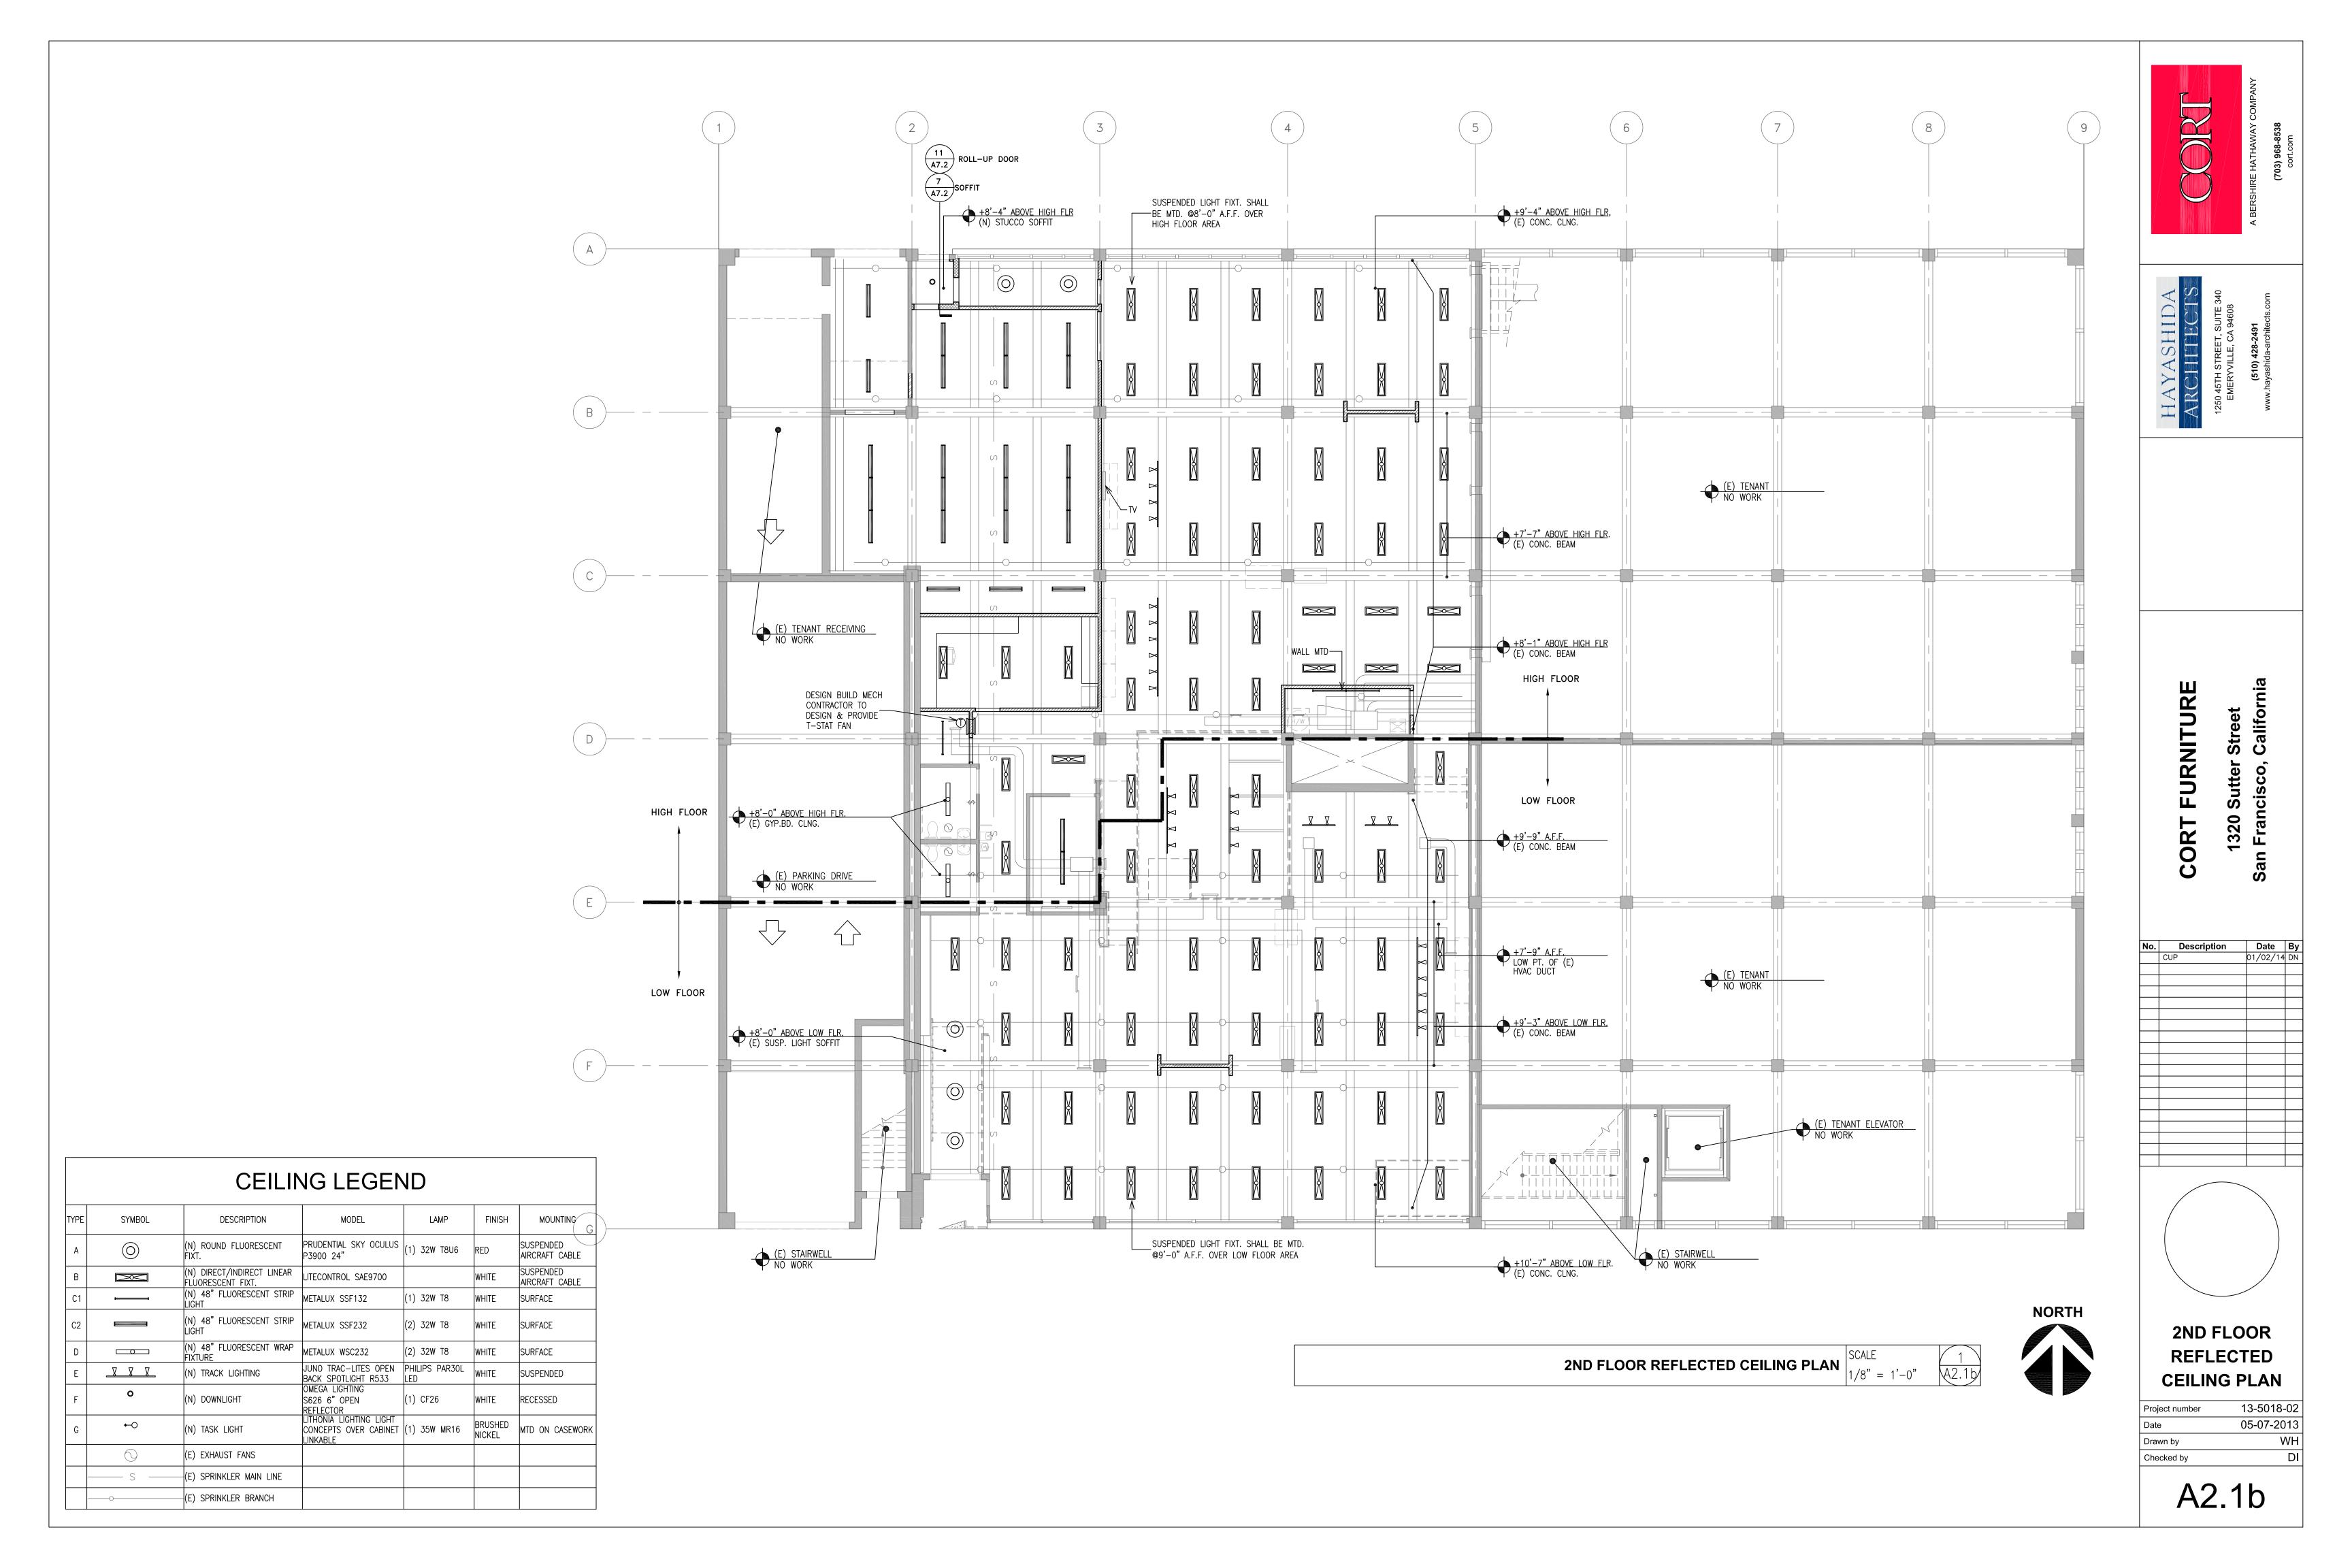



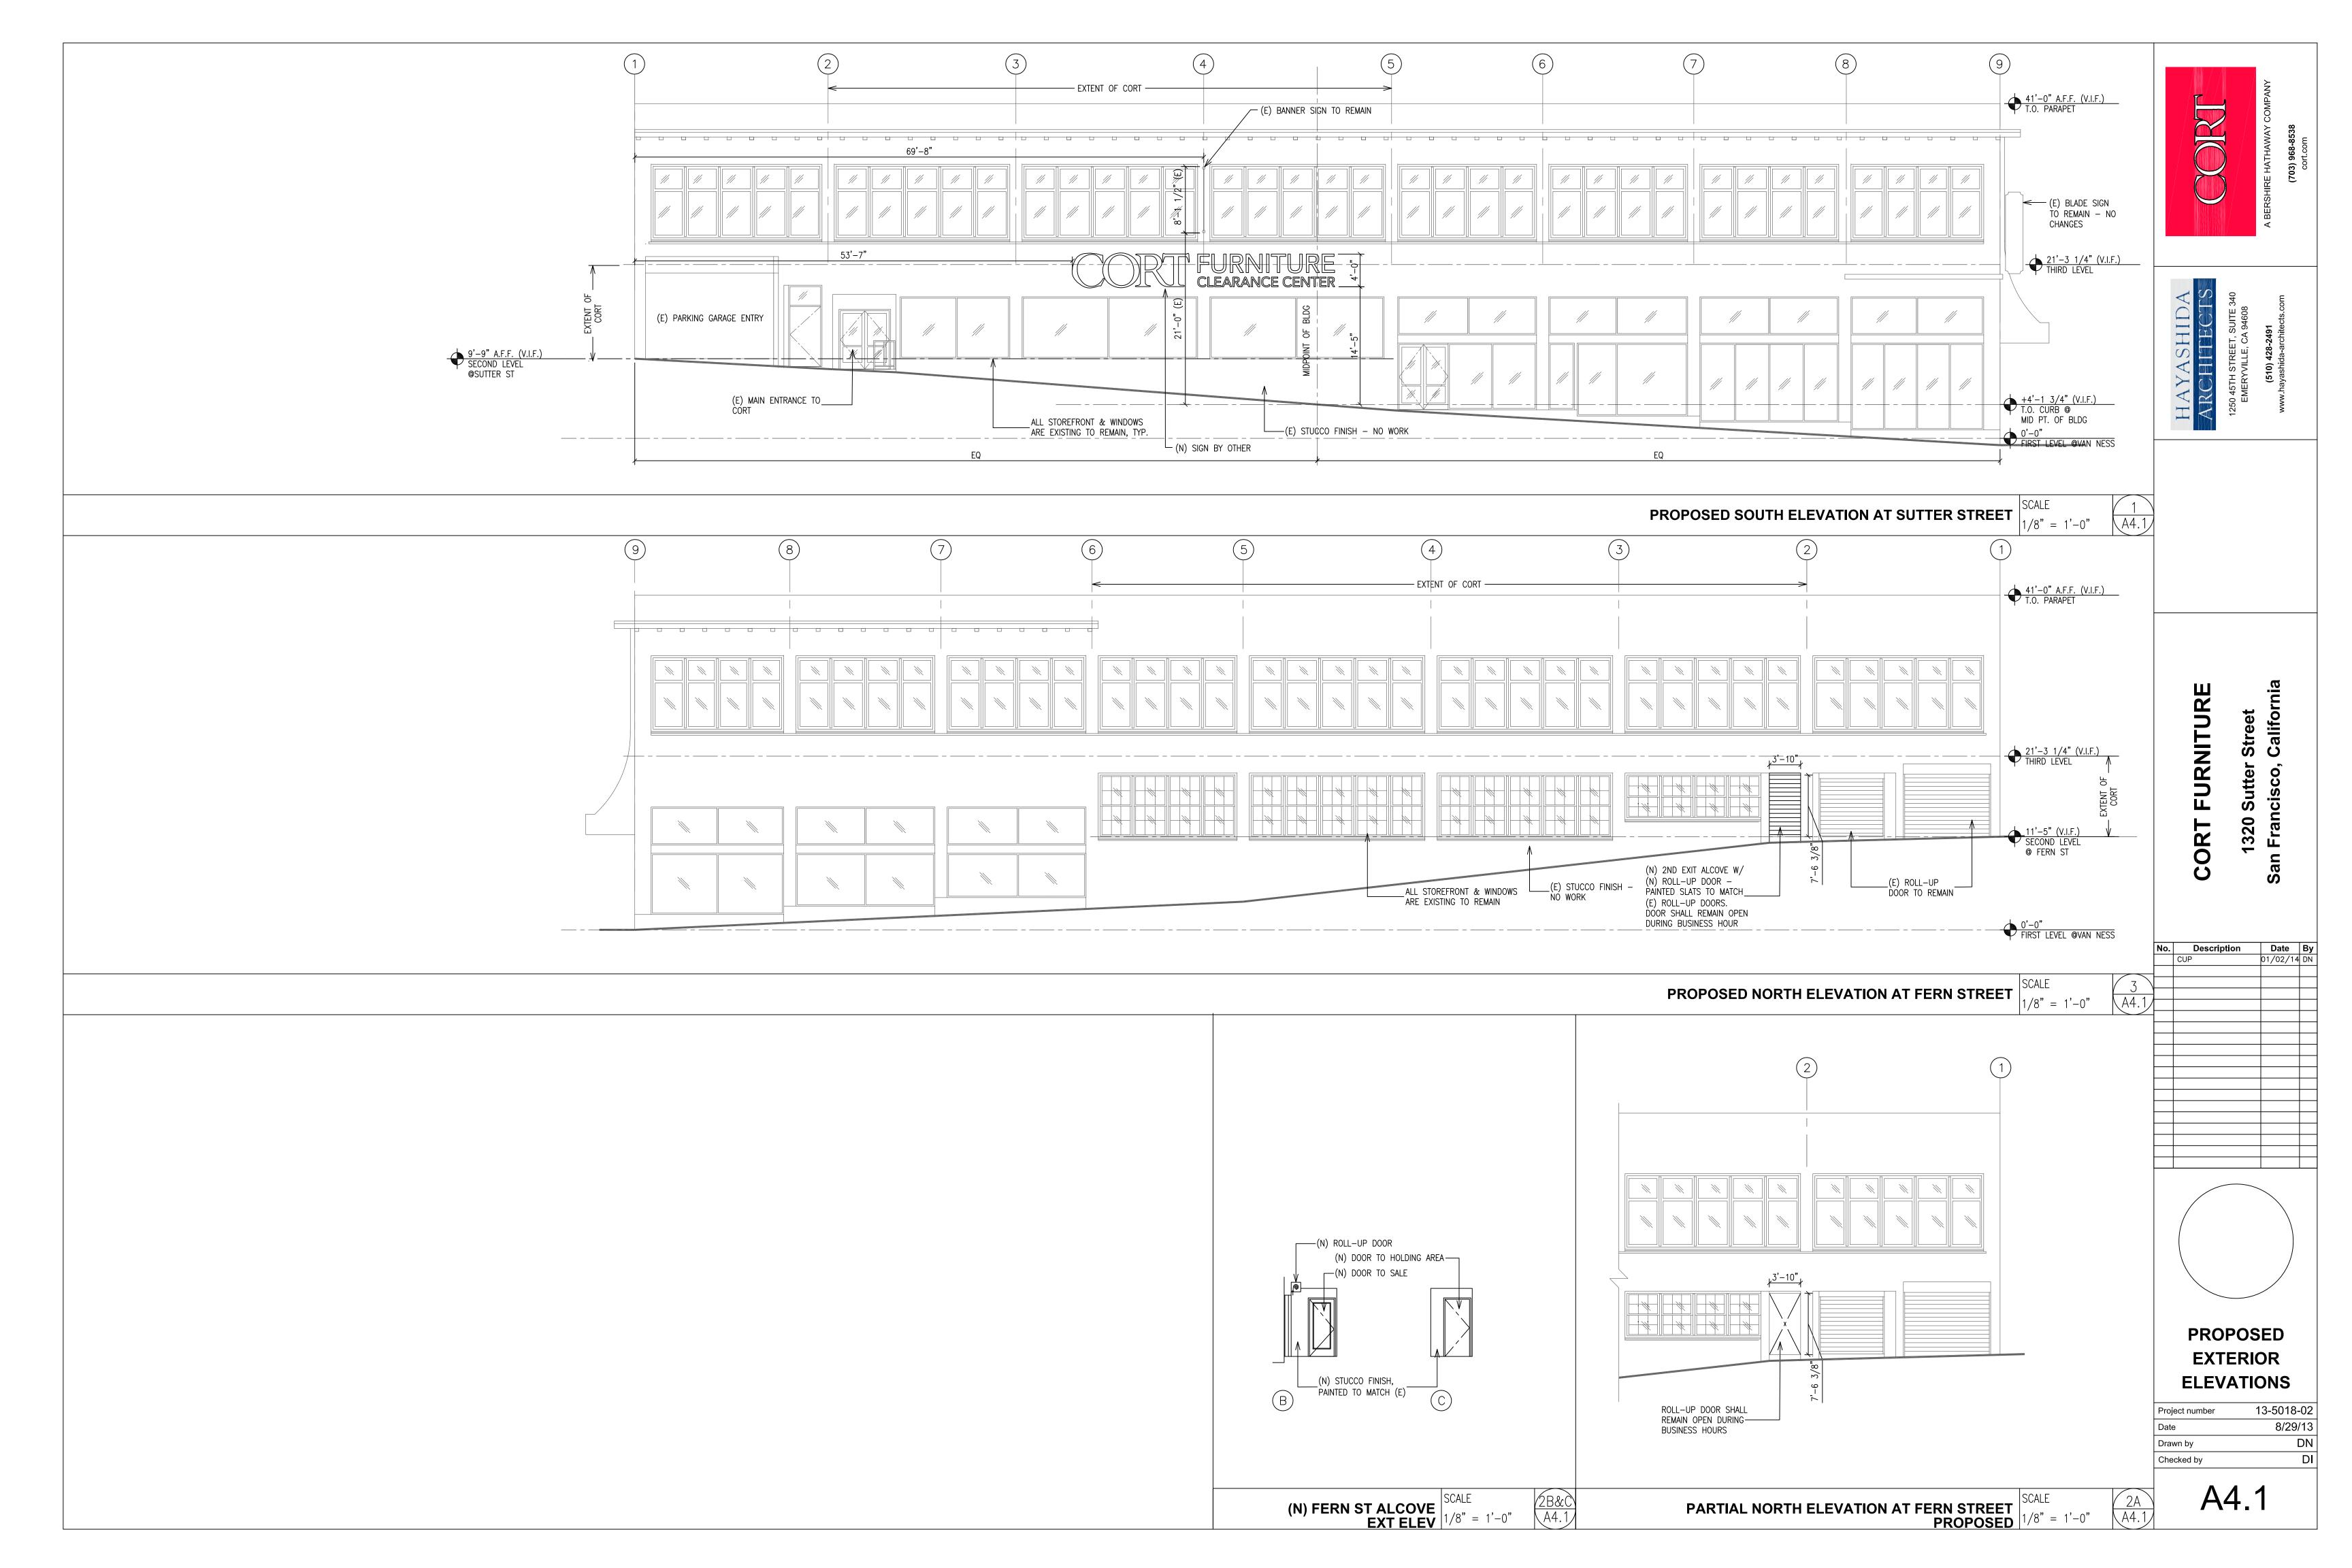

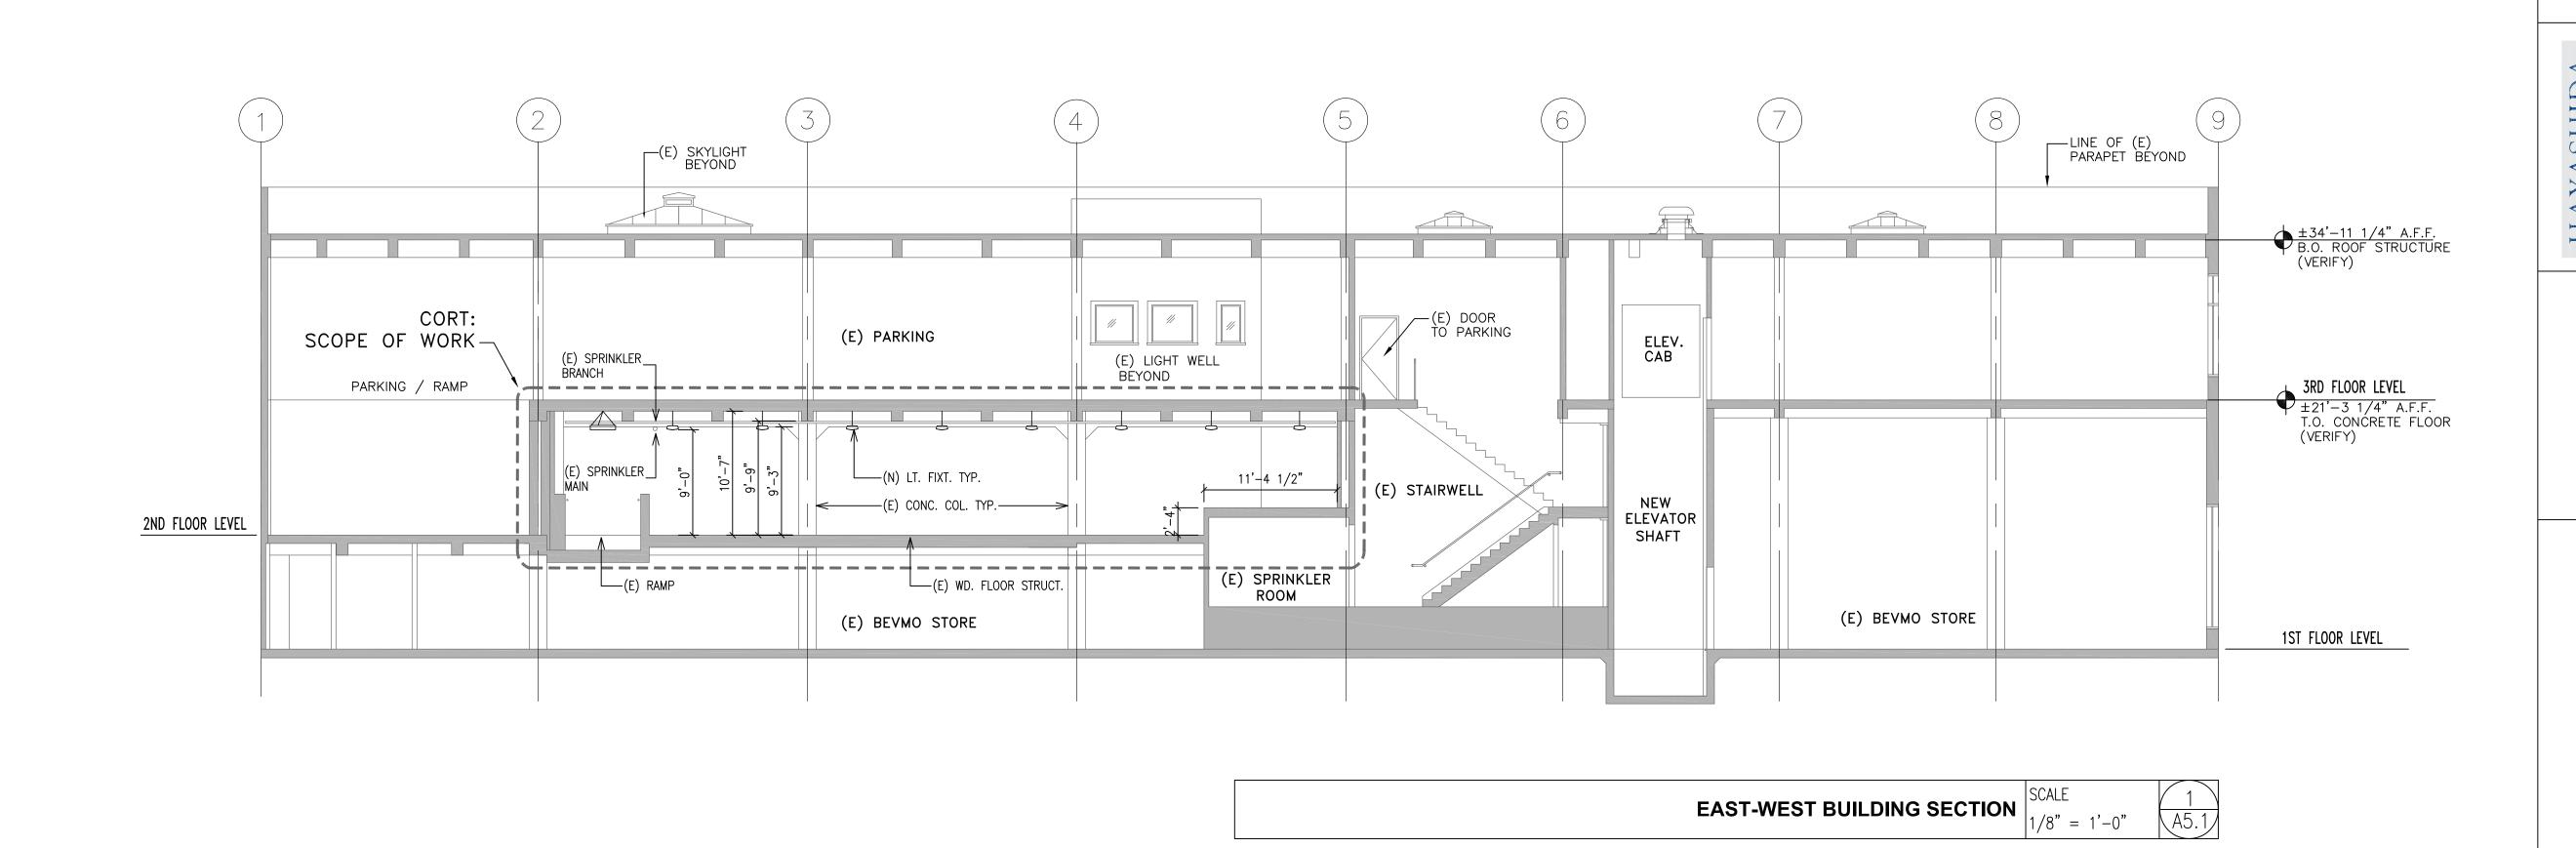

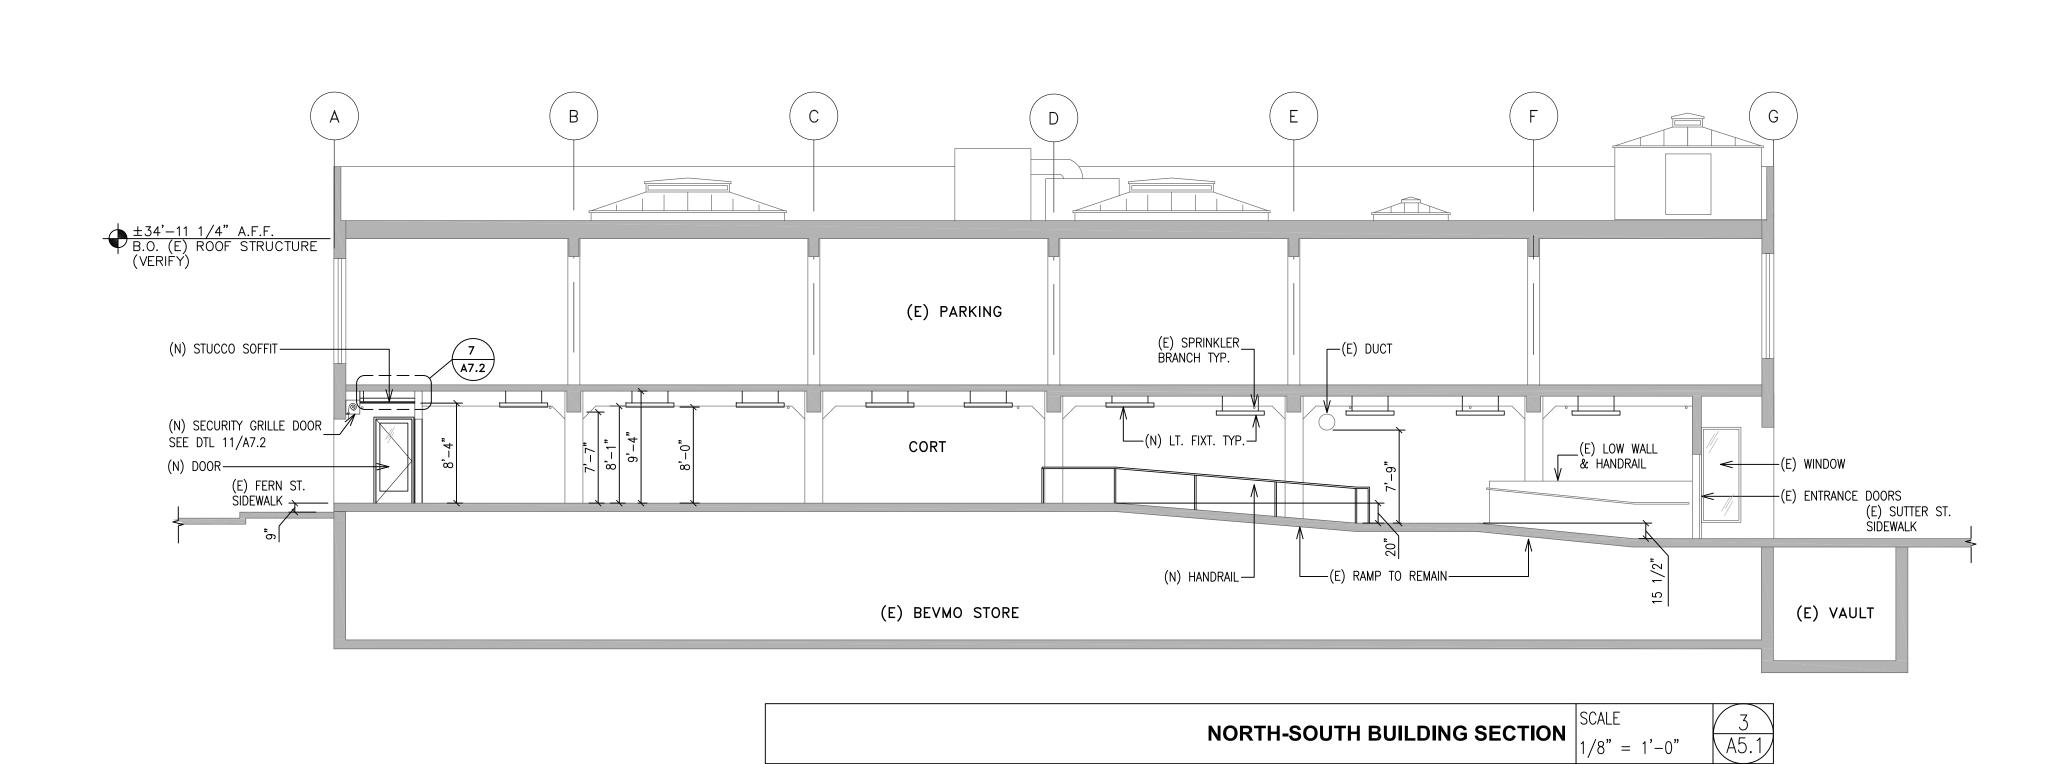



ARCHIFIECTS
1250 45TH STREET, SUITE 340
EMERYVILLE, CA 94608

CORT FURNITURE
1320 Sutter Street
San Francisco, California

No. Description Date By 01/02/14 DN 01/02/

 Project number
 13-5018-02


 Date
 04/17/2013


 Drawn by
 DN


 Checked by
 DI


SECTIONS


A5.1

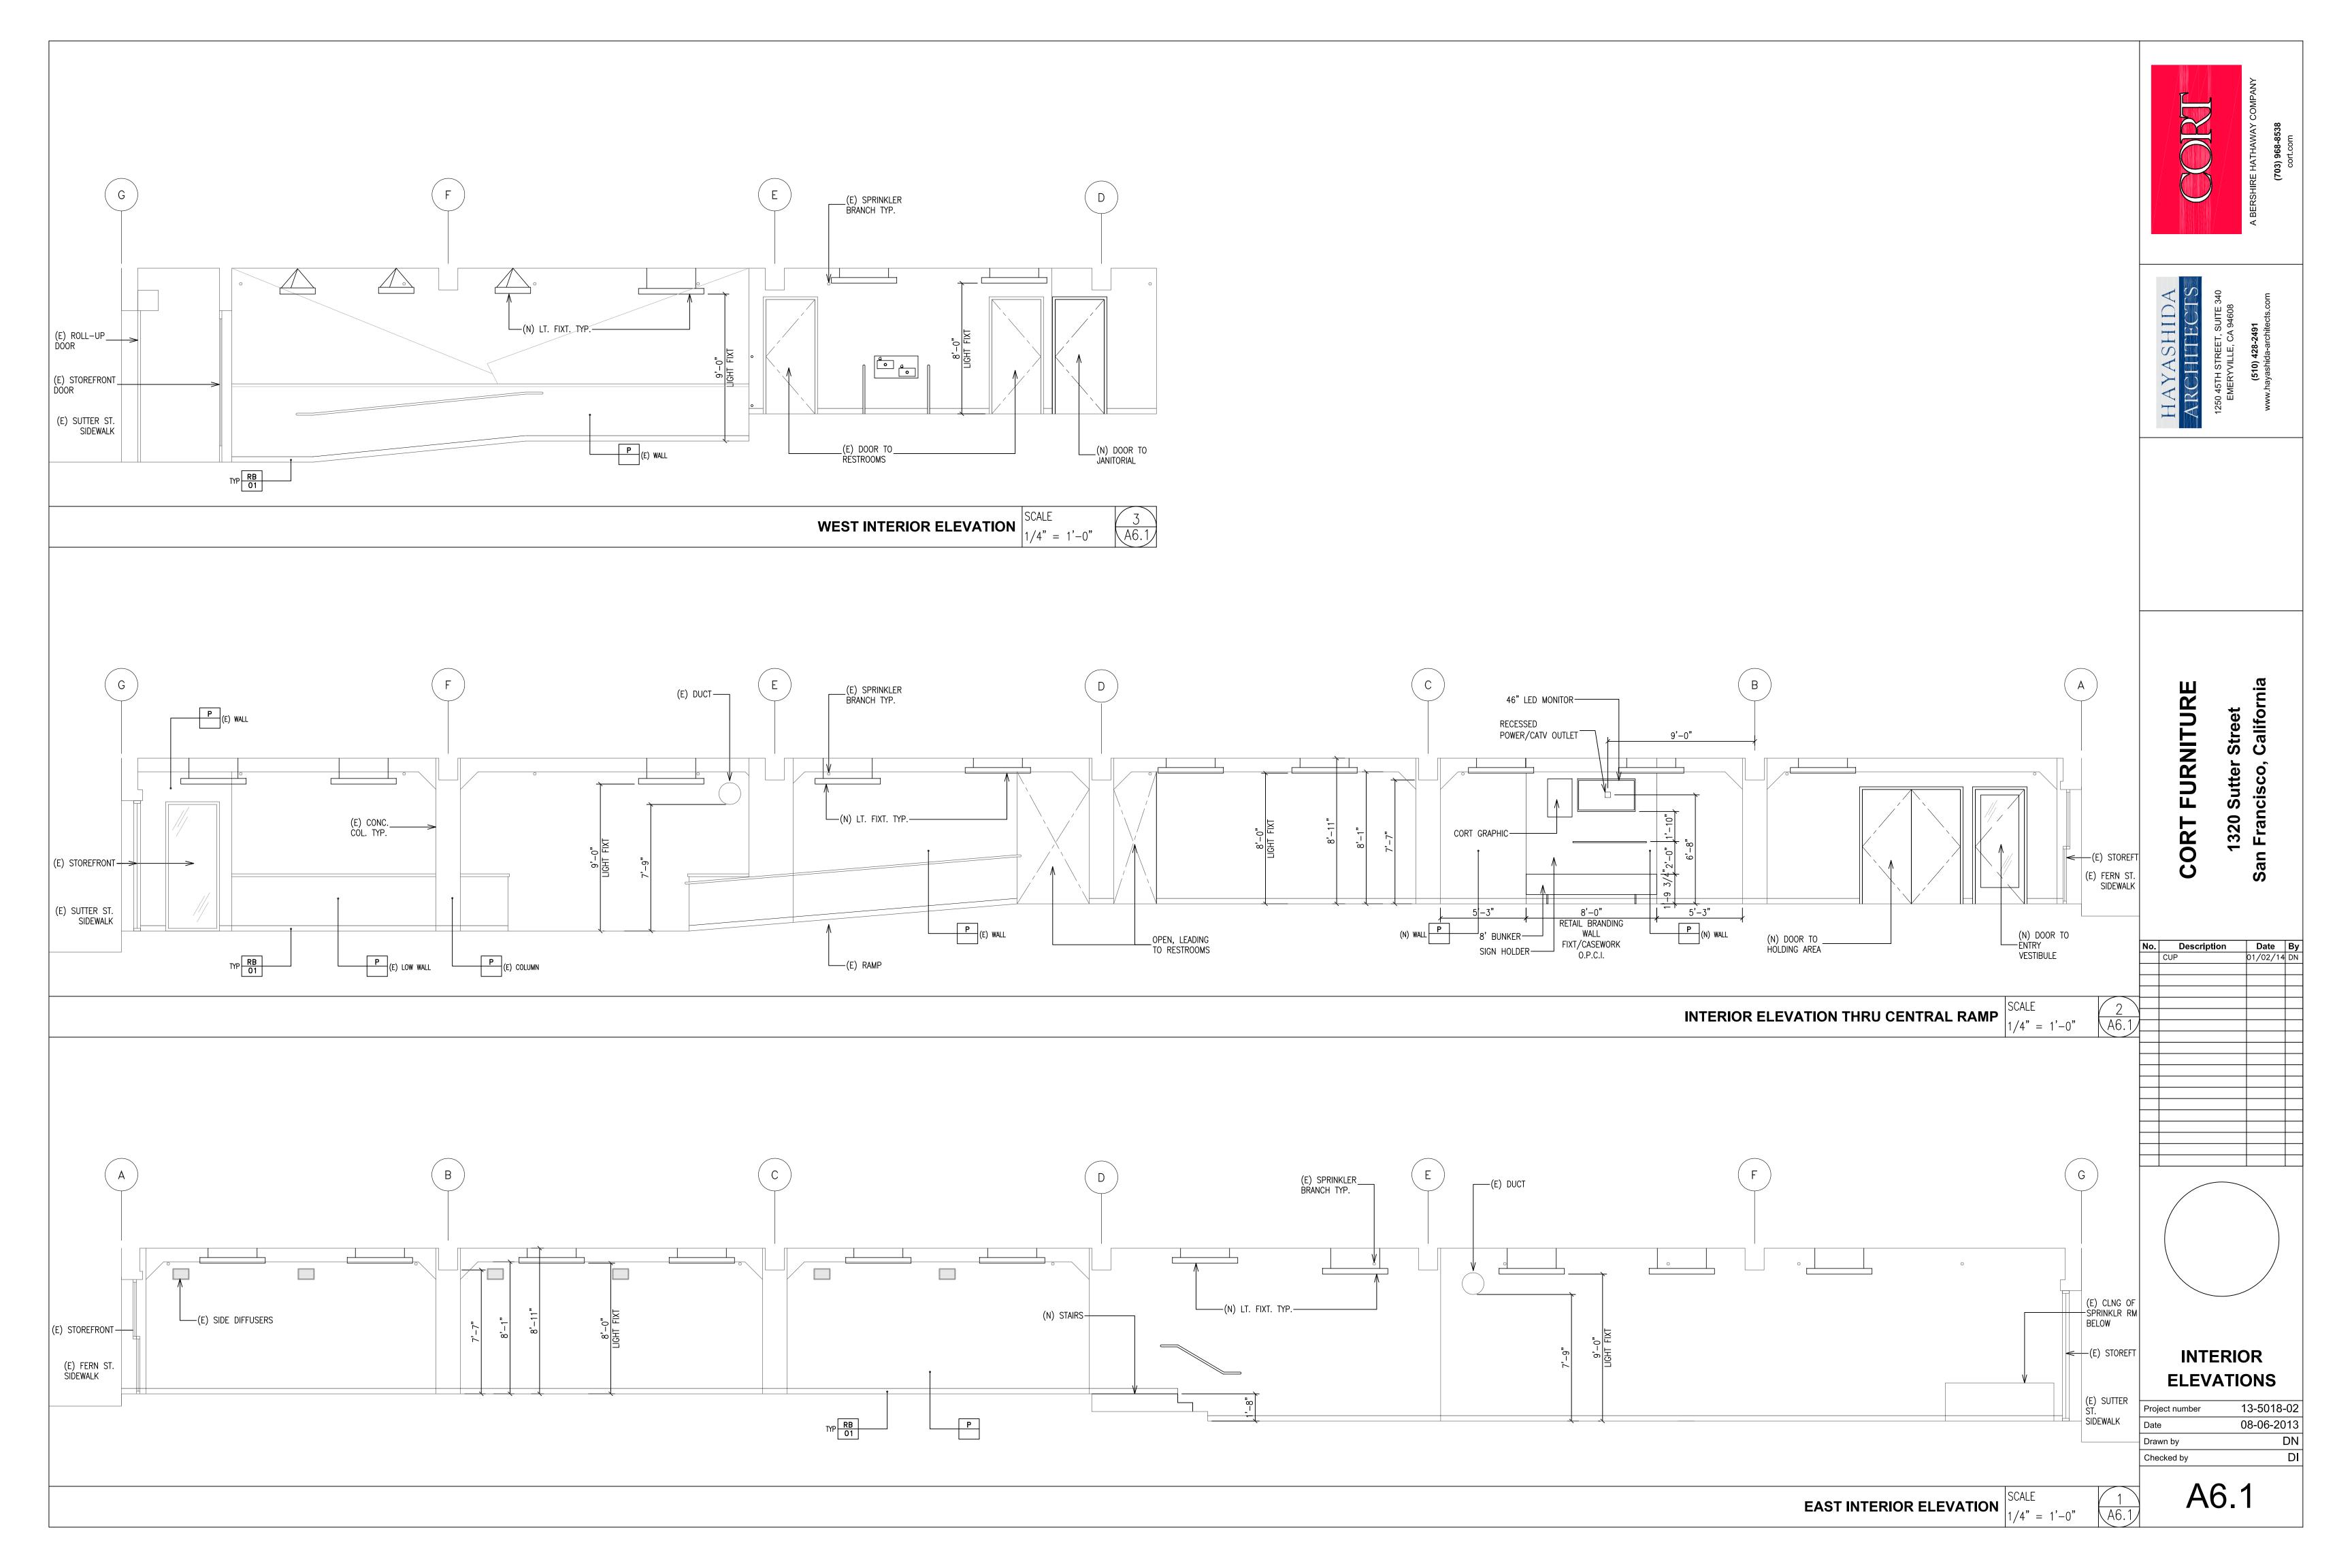

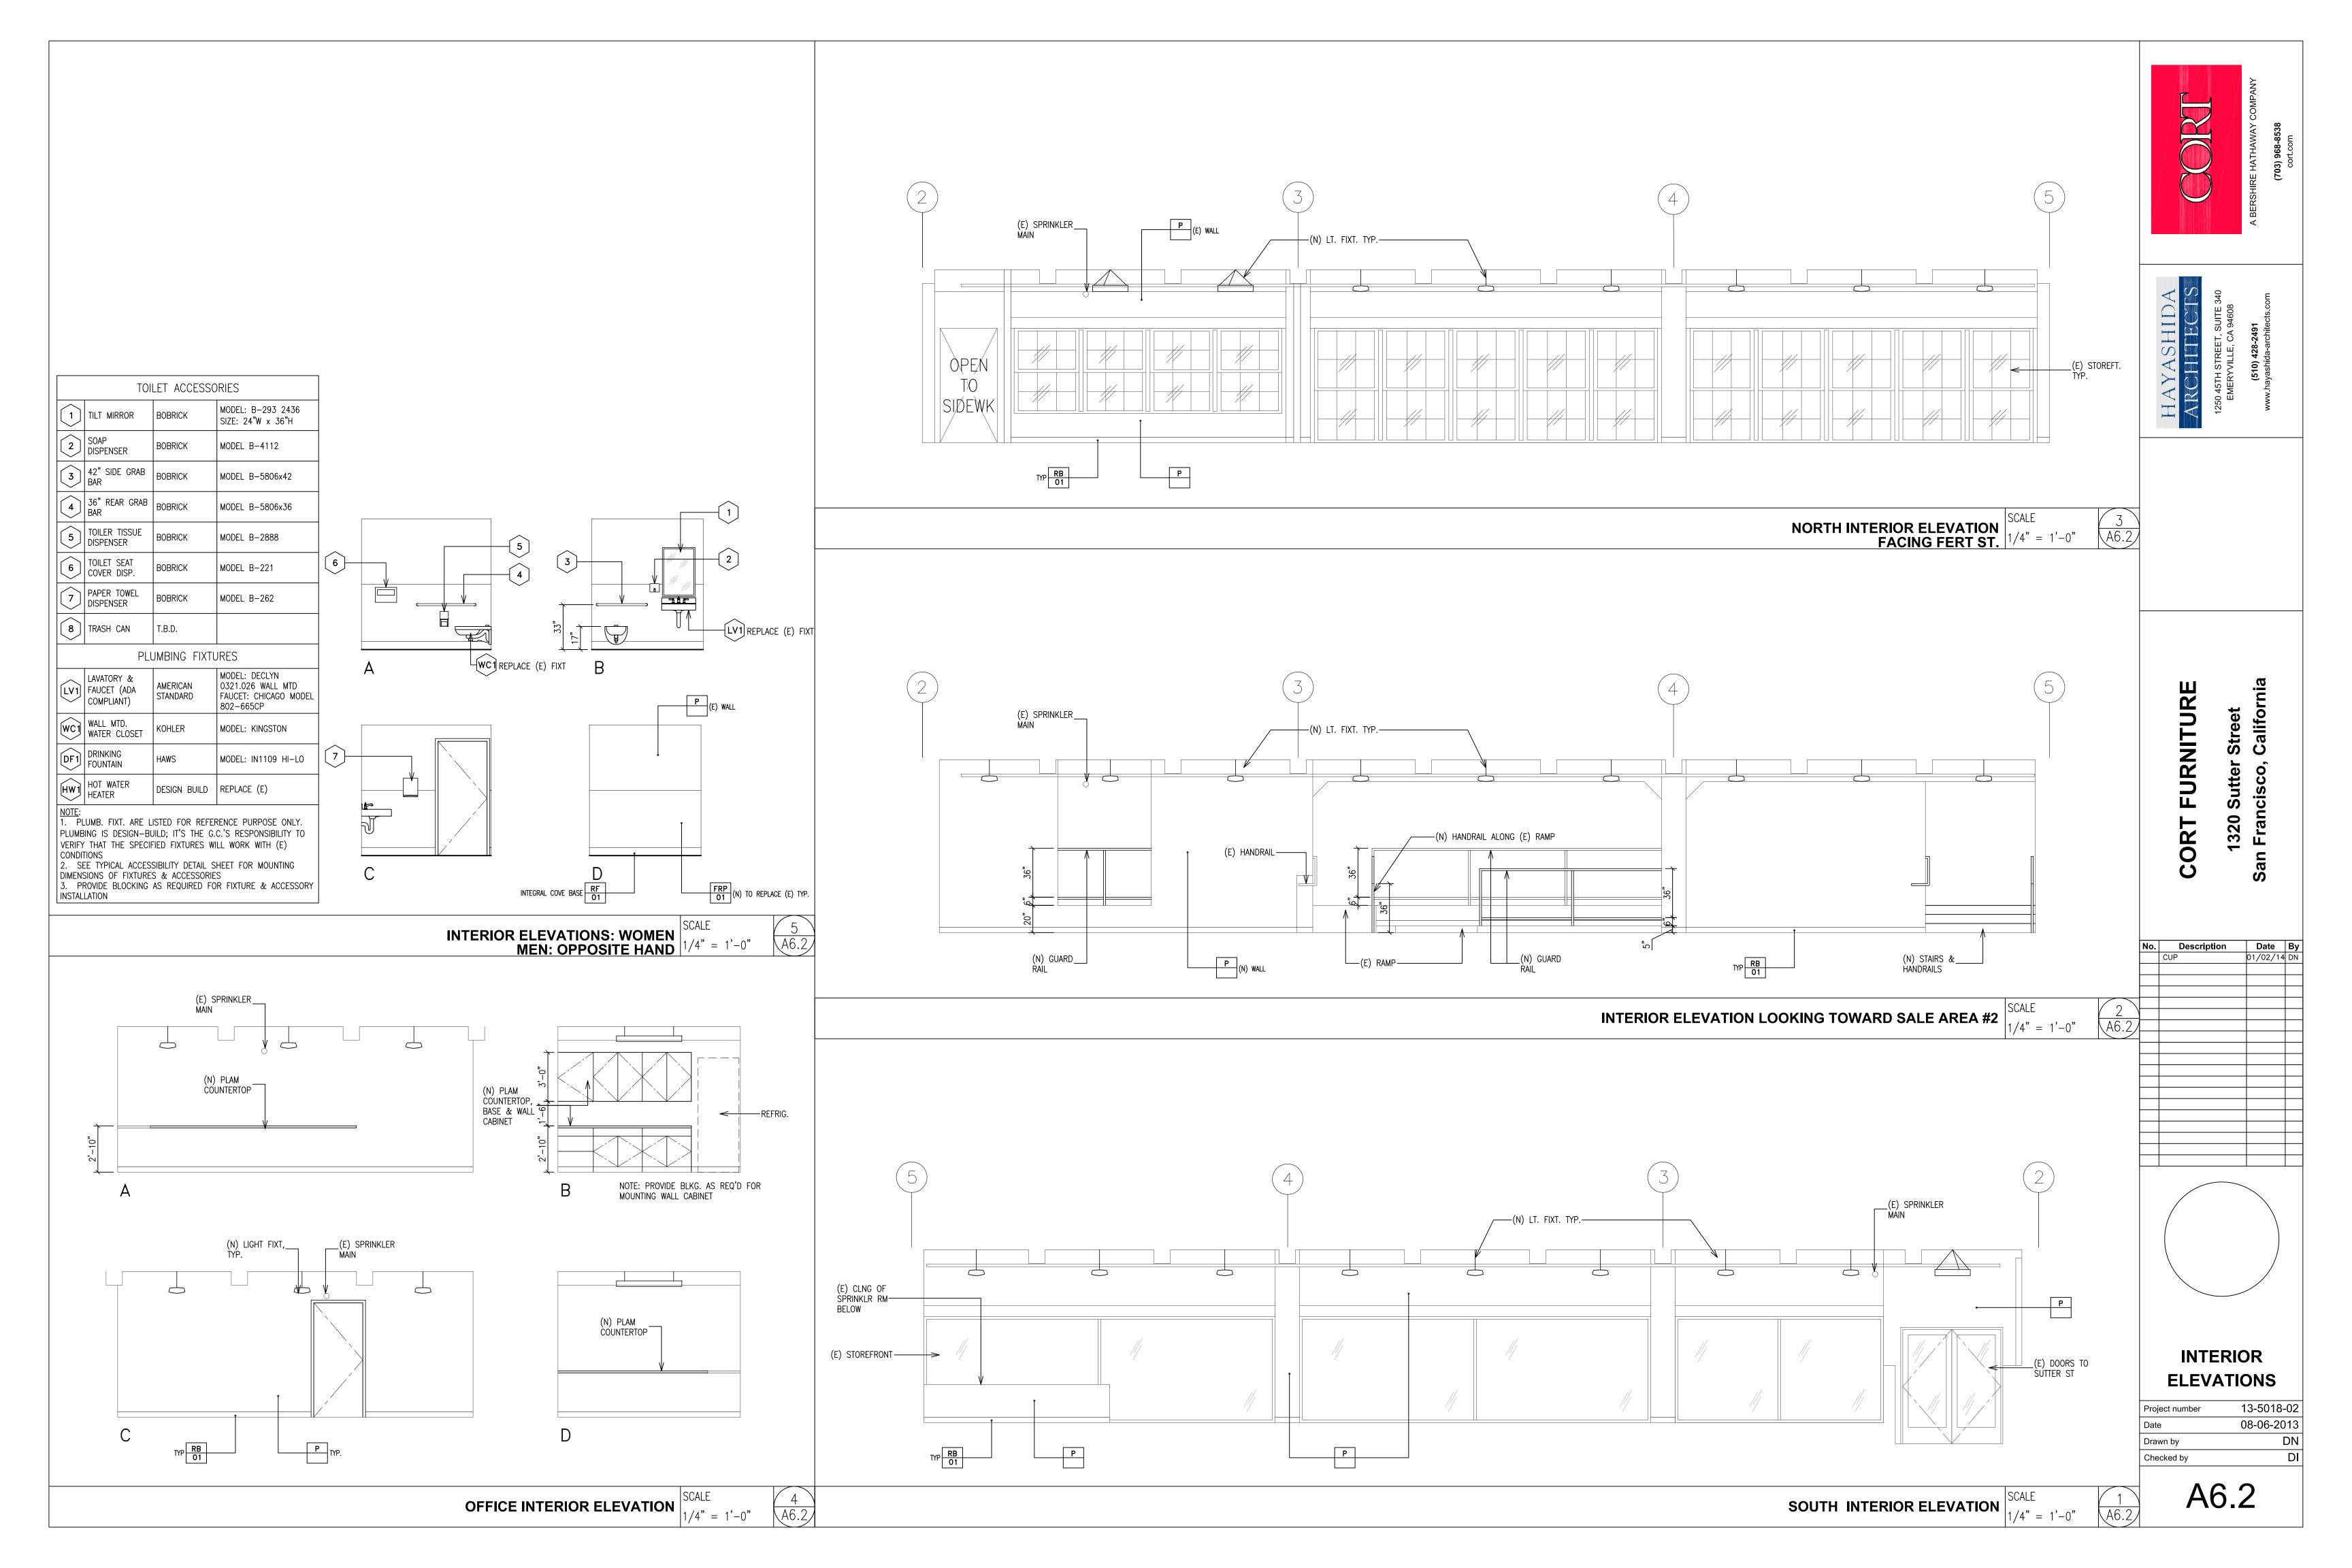

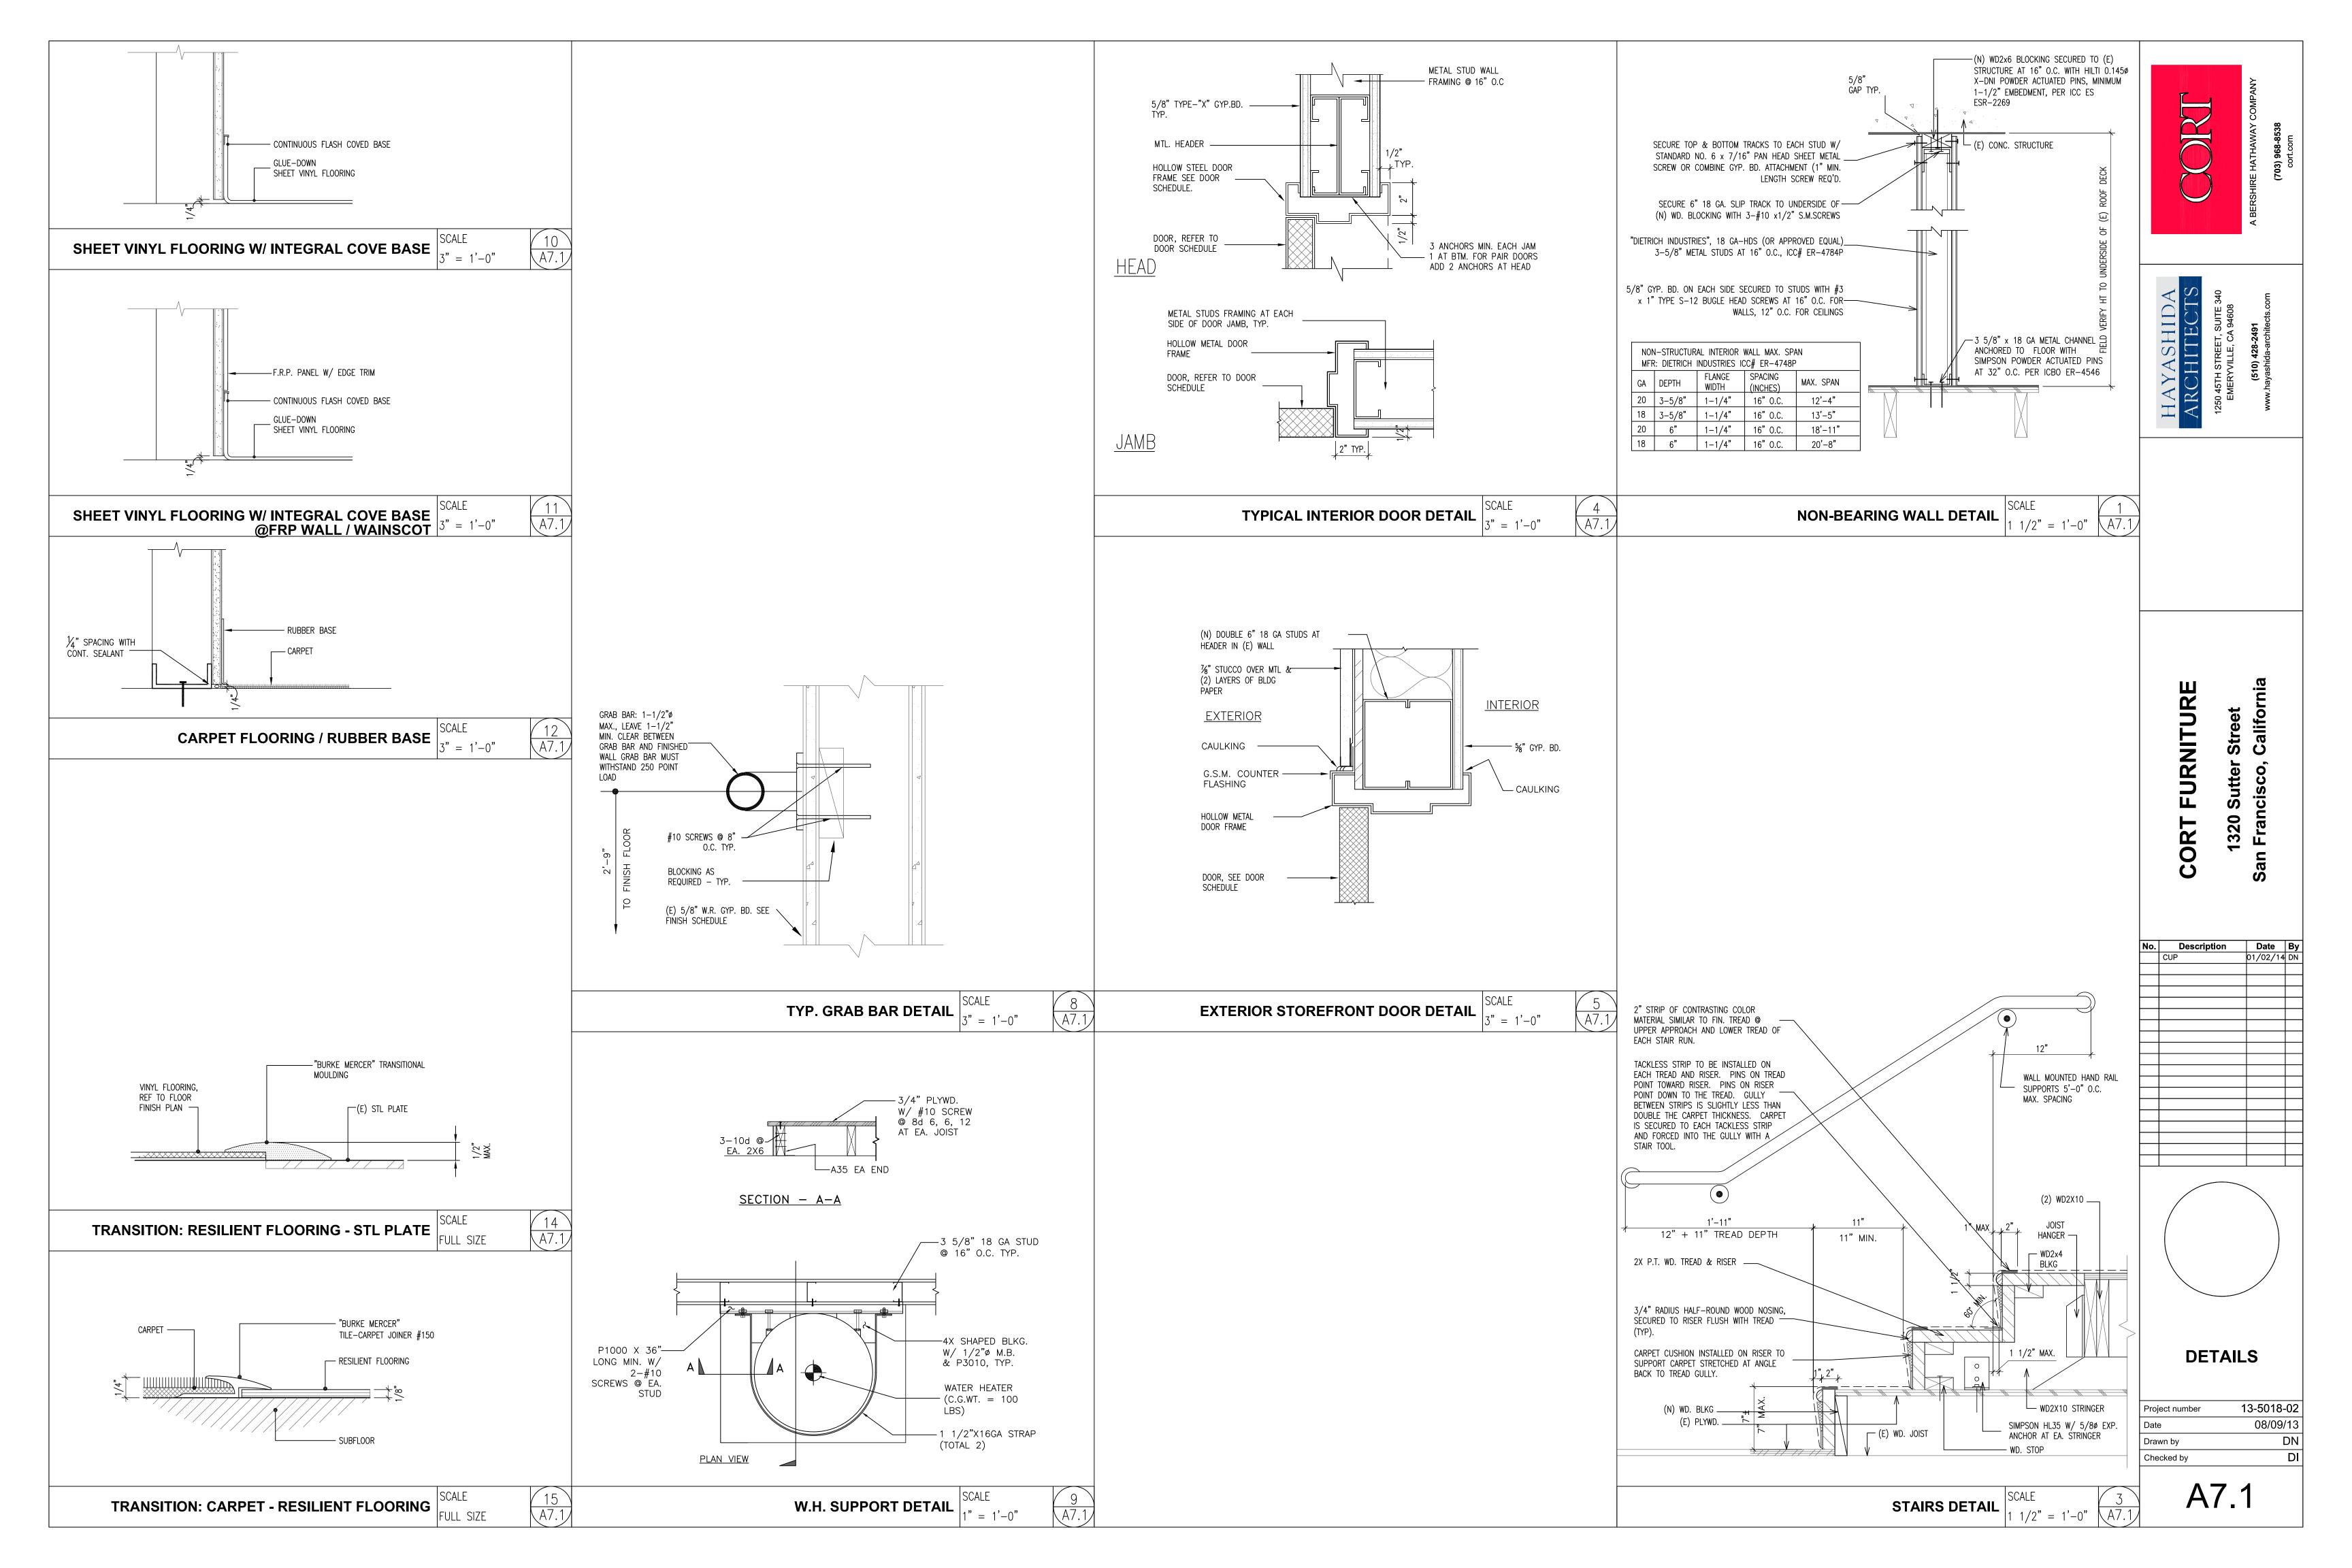

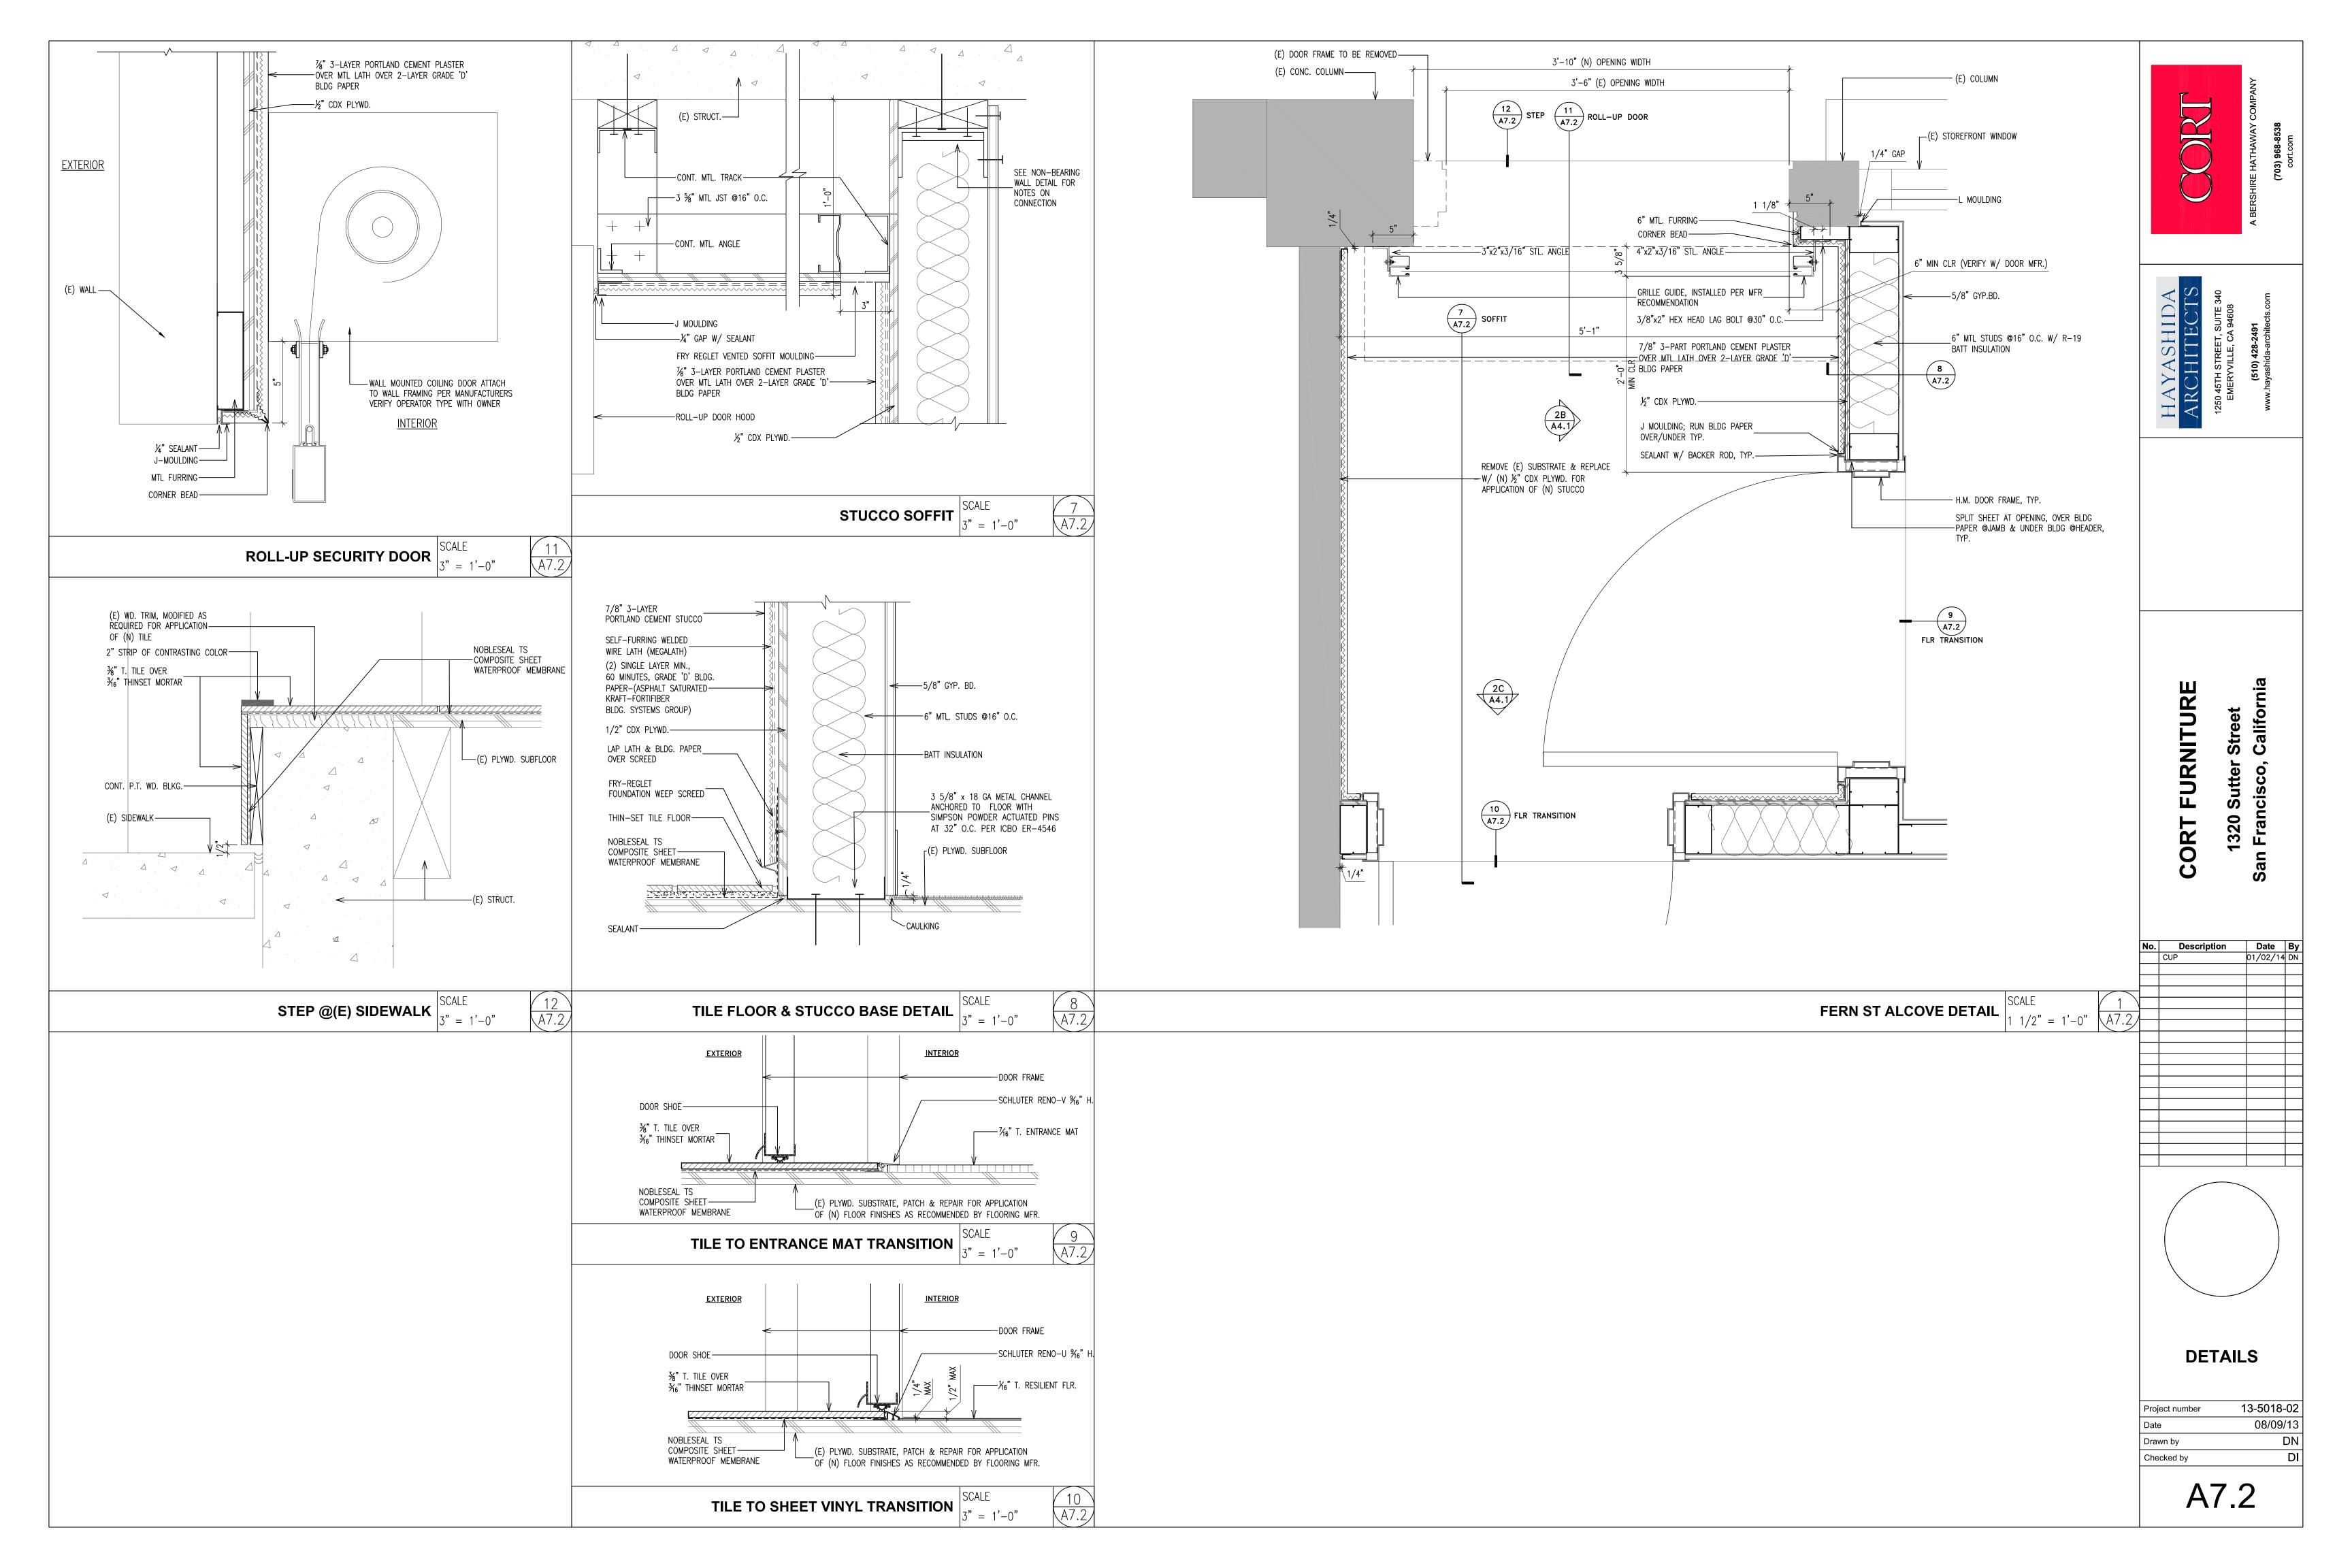



COLORS

- #2283 RED ACRYLIC
- BLACK PERF

BIGN CALCULATIONS

> SIGN PROPOSED - 128.5 SQ. FT.

POWER REQUIREMENTS

>EXISTING


GENERAL NOTES

- > (1) 48" SET "CORT" LETTERS
- > RED RETURNS
- > RED ACRYLIC FACES
- > 1" RED TRIMCAP
- > RED LEDs
- > WEEPHOLES

"FURNITURE RENTAL & CC" LETTERS

- > BLACK RETURNS (TBD)
- > WHITE ACRYLIC FACES W/BLACK PERF VINYL
- > 1" BLACK TRIMCAP
- > WHITE LEDS
- > WEEPHOLES
- > 3 SEPARATE 6"x 8" RACEWAYS
 PAINTED Sw6119 ANTIQUE WHITE







www.nationalsign.com

CONNECTICUT

780 FOUR ROD RD. BERLIN, CT PHONE (860) 829-9060

MASSACHUSETTS

195 JOHN DIETSCH SQUARE NORTH ATTLEBORO, MA PHONE (508) 809-4638

THE DRAWING IS THE PROPERTY OF NATIONAL SIGN CORPORATION AND ALL RIGHTS TO ITS USE FOR REPRODUCTION ARE RESERVED BY NATIONAL SIGN CORP.

CLIENT/PROJECT



OCATION:

SAN FRANCISCO, CA

FILE NAME: CORT FURNITURE RENTAL SAN FRANCISCO, CA

DRAWING NO.

42261-04

SCALE

SUALE AS MARKEY

DRAWN BY:

DDD

10/31/13

JECT MANAGER SANDRA REYNOLDS

REVISIONS


REV 1: 00/00/00

DDD

11/11/13

REV. 2: 00/00/00

(UL) E164024

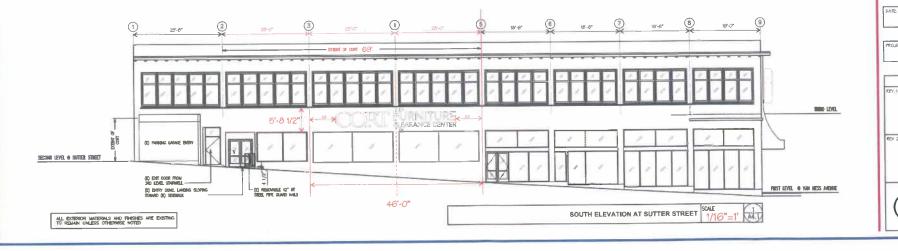

All retail use establishments must fill out the following form and sign the Affidavit before the Planning Department can complete review of a permit.

PROJECT ADDRESS:				
1320 Sutter Street, San Francisco, CA 94109				
BLOCK/LOT:	ZONING DISTRICT:	EXISTING/PREVIOUS USE & SQUARE FOOTAGE:		
0671/002	RC-4	Retail/8,000 gross square feet		

Proposed Use

NAME OF PROPOSED USE CATEGORY PER ARTICLE 7 OR 8, AS APPLICABLE: Sales and Service, Retail
PROPOSED BUSINESS NAME: CORT Furniture Clearance Center
DESCRIPTION OF PRODUCTS OR SERVICES:
CORT will sell previously-leased residential and office furniture.

Retail Operation

1 A	Number of Retail Locations in Operation	How many retail locations of this business are currently in operation nationwide?	See attached 91* addendum.	d letter-
1 B	Other Pending Locations in San Francisco	How many other sites in San Francisco have pending applications or approved permits to establish additional locations for this business that have not commenced operation?	0	
1 C	Other Pending Locations Nationwide Outside of San Francisco	How many other US sites outside of San Francisco have pending applications or approved permits to establish additional locations for this business that have not commenced operation?	2	

If the number entered on Line 1 A above is 12 or more then the proposed use may be a Formula Retail Use and the questions in the following table must be answered. If the sum is 11 or fewer the Applicant does not need to provide any additional information on this form and may proceed to sign the Applicant's Affidavit on the subsequent page.

STAN	IDARDIZED FEATURES	······································	YES	NO	
2	Standardized array of merchandise	Will this proposed use sell merchandise from a single distributor, bearing uniform markings and comprising 50% or more of the merchandise offered for sale, as measured by shelf or display space, in common with other locations of this business?		/	
3	Standardized facade	Will the proposed facade (face or front of the building looking onto a street or an open space), including awnings, have a facade design in common with other locations of this business?		/	
4	Standardized decor and color scheme	Will the interior of the business space, which may include but is not limited to, finishes, style of furniture, wall coverings, permanent fixtures or furnishings, have a style in common with other locations of this business?		'	
5	Uniform apparel	Will the proposed business require standardized items of clothing for employees, including but not limited to aprons, pants, shirts, smocks or dresses, hats and pins)other than name tags) as well as standardized colors of clothing style in common with other locations of this business?	4	See attache addendum.	
6	Standardized signage	Will the proposed business display one or more business signs (as defined in §602.3 of the Planning Code) in common with other locations of this business?		/	
7	Trademark or Service mark	Will the proposed business utilize a Trademark (a word, phrase, symbol or design, or a combination of those that identifies and distinguishes the source of the goods of one party from those of others) or a Service mark (a word, phrase, symbol or design, or a combination of those that identifies and distinguishes the source of the services of one party from those of others) in common with other locations of this business?	~		
8	Total Features	Enter the total number of "YES" responses from lines 1 (previous page) through 7	2		

Requirements and Provisions of the Code

If the number of national locations (excluding the location proposed in this application) in Line 1 A is 12 or more and if the number of total standardized features of this business in Line 8 is 2 or more, then the proposed use is a Formula Retail Use.

All Building Permit Applications for Formula Retail Uses for any use categories permitted shall be subject to the notification and design review procedures of §312 of the Planning Code as changes of use.

If the Planning Department determines that an application or permit is for a Formula Retail Use the permit applicant of holder bears the burden of proving to the Planning Department that the proposed or existing use is not a Formula Retail Use. Any permit approved for a use that is determined by the Planning Department to be for a Formula Retail Use that did not identify the use as such is subject to revocation at any time.

Applicant's Affidavit

By signing below, I acknowledge: That I am the owner or authorized agent of the owner of this property; that I am familiar with the proposed business and its operation; that I have read and completed this form in its entirety and the information presented is true and correct to the best of my knowledge; and that I understand that receipt of these materials by the Planning Department does not mean that the application has been accepted as complete.

Signature:	De Brestle	Date: (20,3)
Print nam	e, and indicate whether owner, or authorized agent:	
	David Cincotta Owne(Authorized Agent Circle one)	Phone: 415-398-8080
Mailing Address:	Two Embarcadero Center, 5th fl., San Francisco, CA 94111	Email: DCincotta@jmbm.com
	Planning Department De	termination
	THIS SECTION TO BE COMPLETED EXCLUSIVELY BY	PLANNING DEPARTMENT STAFF
The pro	posed use has been determined to be a Formula Retail Use:	Yes No No
In the s	ubject District the proposed use is:	Principally Permitted 🗌
		Requires Conditional Use
		Not Permitted 🗌
Subject	Address:	Block/Lot:
Applica	tion No.:	Date Filed:
Applica	ition Type:	
Signatu	re:	Date:
Printed	Name:	Phone:

David P. Cincotta Direct: (415) 984-9687 Fax: (800) 365-1372 DCincotta@jmbm.com Two Embarcadero Center, 5th Floor San Francisco, California 94111-3813 (415) 398-8080 (415) 398-5584 Fax www.jmbm.com

October 7, 2013

Sharon Lai San Francisco Planning Department 1650 Mission Street, Suite 400 San Francisco, California 94103-2479

Re: Case No. 2013.1329C (1320 Sutter Street): Addendum to Formula Retail Use Affidavit

Dear Ms. Lai:

The purpose of this addendum is to clarify several responses in the formula retail use affidavit that we are filing on behalf of our client, CORT Furniture Clearance Center (CORT). This additional information should help the Planning Department and the Planning Commission to better evaluate the project.

Question 1A- Number of Retail Locations in Operation: How many retail locations of this business are currently in operation nationwide?

While CORT maintains a total of 138 facilities in the continental United States, only **five** of those facilities are clearance centers in the style of the proposed project. CORT's primary business involves furniture leasing, therefore, the vast majority of its facilities are a combination of warehouses and furniture leasing showrooms or a combination of the two. For the purpose of answering question 1A, we deducted CORT's 47 warehouse only facilities from its total number of facilities as they are not "retail" operations. This leaves 91 facilities which have some component of either a leasing or sales use. The proposed project will replace one of CORT's five existing clearance center only facilities.

Question 4- Will the interior of the business space, which may include but is not limited to, finishes, style of furniture, wall coverings, permanent fixtures or furnishings, have a style in common with other locations of this business?

As stated in the affidavit, the answer to this question is "no." CORT is proposing a unique design concept that is currently used at only one other furniture clearance center, which is located in Houston, Texas.

Sharon Lai October 7, 2013 Page 2

Question 5- Uniform Apparel: Will the proposed business require standardized items of clothing for employees, including but not limited to aprons, pants, shirts, smocks or dresses, hats and pins (other than name tags) as well as standardized colors of clothing style in common with other locations of this business?

CORT will offer employees significant discretion with regard to workplace apparel. While a certain style may be emphasized, CORT employees may wear various colors of polo shirts (with a logo), or can instead choose to wear a shirt and tie with a name tag. Given the options available to employees, workplace apparel may be significantly varied among employees, both within the San Francisco store and throughout CORT's four other clearance center only facilities.

Very truly yours,

DAVID P. CINCOTTA, Of Counsel to Jeffer Mangels Butler & Mitchell LLP

DPC:cg