

TRANSPORTATION IMPACT ANALYSIS GUIDELINES

PUBLIC TRANSIT MEMORANDUM ATTACHMENTS



San Francisco
Planning

Existing and Proposed Project Figure and Table Examples

Introduction

Attachment A represents typical figures necessary to illustrate transit conditions included in a transportation study. All figures should include basic elements (e.g., north arrow, title, legend, references, acronyms, etc.). Symbology should reflect that documents may be printed in black and white. All figures and tables should include all the information the reader would need to understand the information presented. The figures presented below were from previous transportation studies and are illustrative only and may not include all the basic elements.

FIGURE 1

Site Plan

Figure 1 is an example of a site plan that includes a detailed description of existing and proposed streetscape elements that could affect existing transit services. When developing a map similar to the one shown, include the linear dimensions of the existing and proposed alternations to publicly-accessible rights-of-way (e.g., parking, loading zones, bicycle facilities, or transit facilities). The presence of infrastructure or streetscape elements that assist with the operation of transit (e.g., Muni overhead wire poles, transit shelters) should be identified. Any loading zones should match the color of the zones to those used in the SFMTA Color Curb Program. Existing and proposed changes should be explicit.

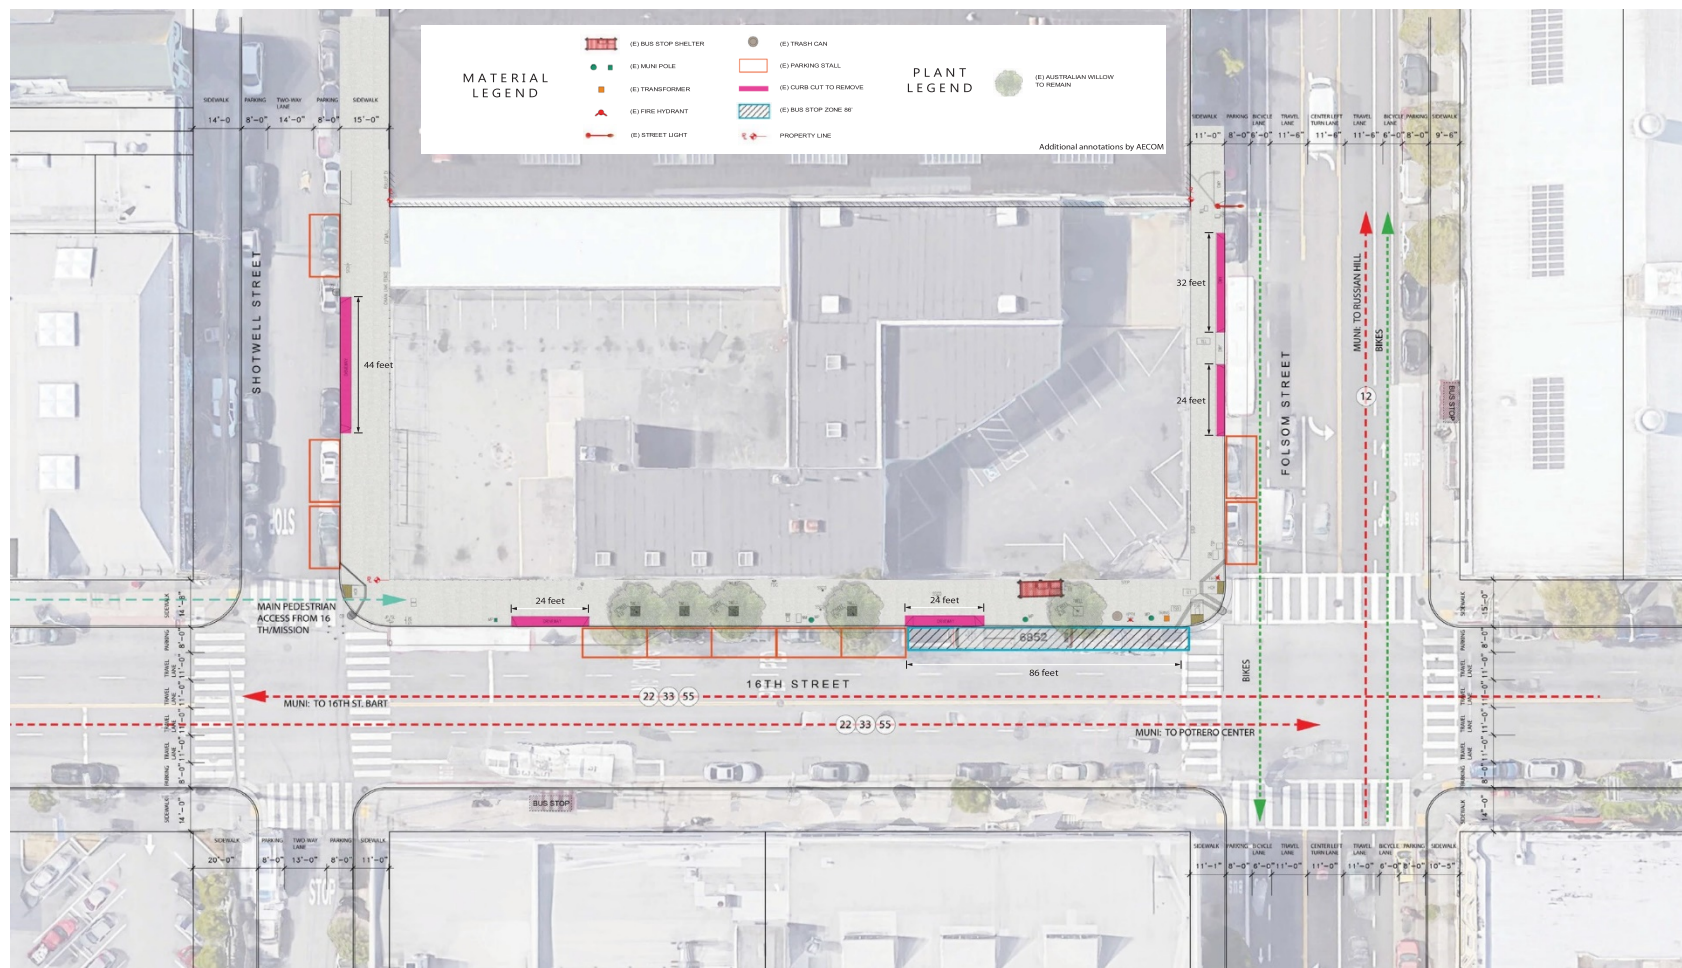


FIGURE 2

Transit Network

Figure 2 shows a transit network map, identifying public transit service that serves the project area and surrounding streets. The dotted lines represent the project study area. Local and regional public transit services are represented through different line colors with labeled route numbers. Line weight by frequency (i.e., Rail, Rapid Bus, Frequent, Grid, Connector, Specialized, Owl) should be identified. Additional symbols are included to identify transit stops, stations, and other important transit facilities.

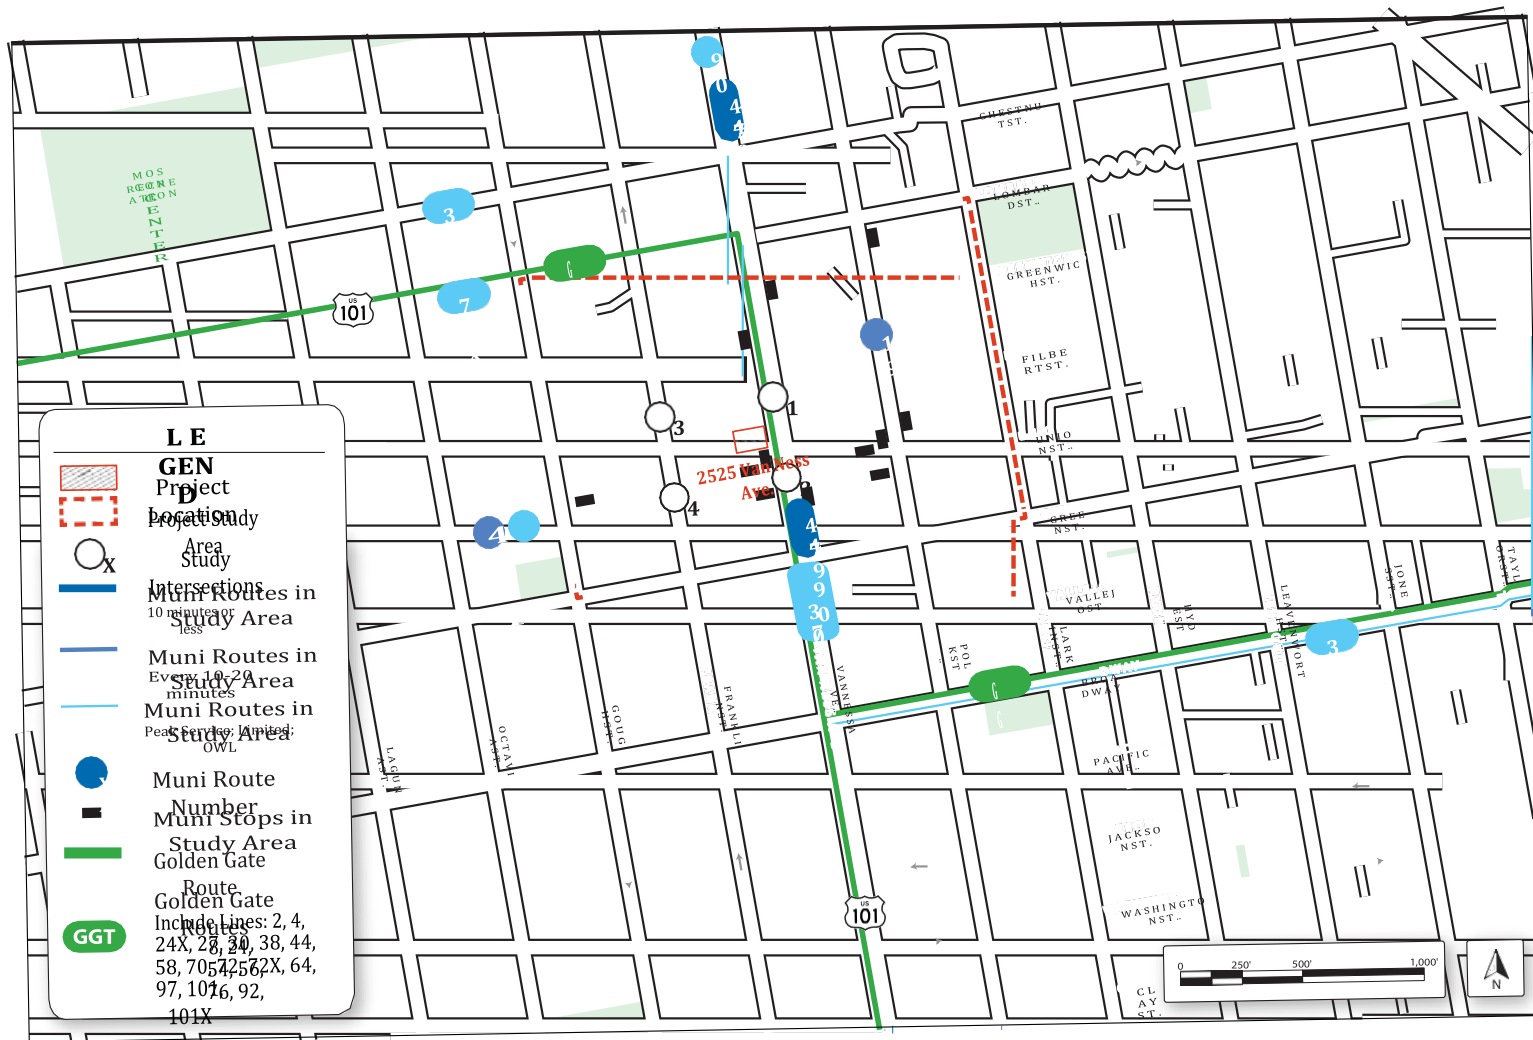


TABLE 1

Existing Public Transit Network Characteristics

Table 1 below presents the existing public transit routes within an approximate quarter-mile of the project site. The table should include all necessary information to describe the existing transit network conditions (e.g., route numbers, service type, and distance to project site). As shown in Table 1, 'x' represents numerical values that would need to be provided and be consistent with project plans.

Route	Direction	Weekday Headways (AM / PM) ¹		Hours of Operation	Nearest Stop Location	Distance to Project Site (feet) ²	Neighborhoods Served by Route
47-Van Ness	IB	8	8	6:00AM - 1:14AM	Van Ness Ave & Union St	325	Fisherman's Wharf, Fort Mason, Marina, Russian Hill, Polk Gulch, Union Street, Cathedral Hill, Lower Nob Hill, Tenderloin, Civic Center, South of Market, Showplace Square
	OB	8	12	5:43AM - 1:16AM	Van Ness Ave & Union St	110	
49-Van Ness /Mission	IB	8	8	5:13AM - 1AM	Van Ness Ave & Union St	325	Fort Mason, Marina, Russian Hill, Polk Gulch, Union Street, Cathedral Hill, Lower Nob Hill, Tenderloin, Civic Center, South of Market, Mission, Bernal Heights, Holly Park, St. Mary's Park, Mission Terrace, Excelsior, Cayuga, Sunnyside, Oceanview
	OB	8	13	5:40AM - 1AM	Van Ness Ave & Union St	110	
76X-Marin Headlands Express	IB	NA	NA	Weekends 10:30AM - 7:25PM	Van Ness Ave & Union St	110	Marin Headlands, Presidio National Park, Marina, Cow Hollow, Union Street, Russian Hill, Polk Gulch, Lower Nob Hill, Financial District
	OB	NA	NA	Weekends 9:30AM - 6:04PM	Van Ness Ave & Union St	325	
90-San Bruno Owl	IB	NA	NA	12:40AM - 5:12AM	Van Ness Ave & Union St	110	Fort Mason, Marina, Russian Hill, Polk Gulch, Pacific Heights, Cathedral Hill, Lower Nob Hill, Tenderloin, Civic Center, SoMa, Mission, Showplace Square, Potrero Hill, Produce Market, Apparel City, Bernal Heights, Portola, Visitacion Valley
	OB	NA	NA	1:17AM - 5:52AM	Van Ness Ave & Union St	325	

Source: SF Muni, 2017; Prepared by CHS Consulting, 2017

Notes:


IB= Inbound; OB = Outbound

1. Headway in minutes. AM peak = 7:00 AM to 9:00 AM and PM peak = 4:00 PM to 7:00 PM

2. Distances are approximate and are measured from the center of the project site along local streets to reach nearest stop. Distances are not measured in a straight line between two points or places.

TABLE 7

SFMTA Ridership Data by Timeperiod

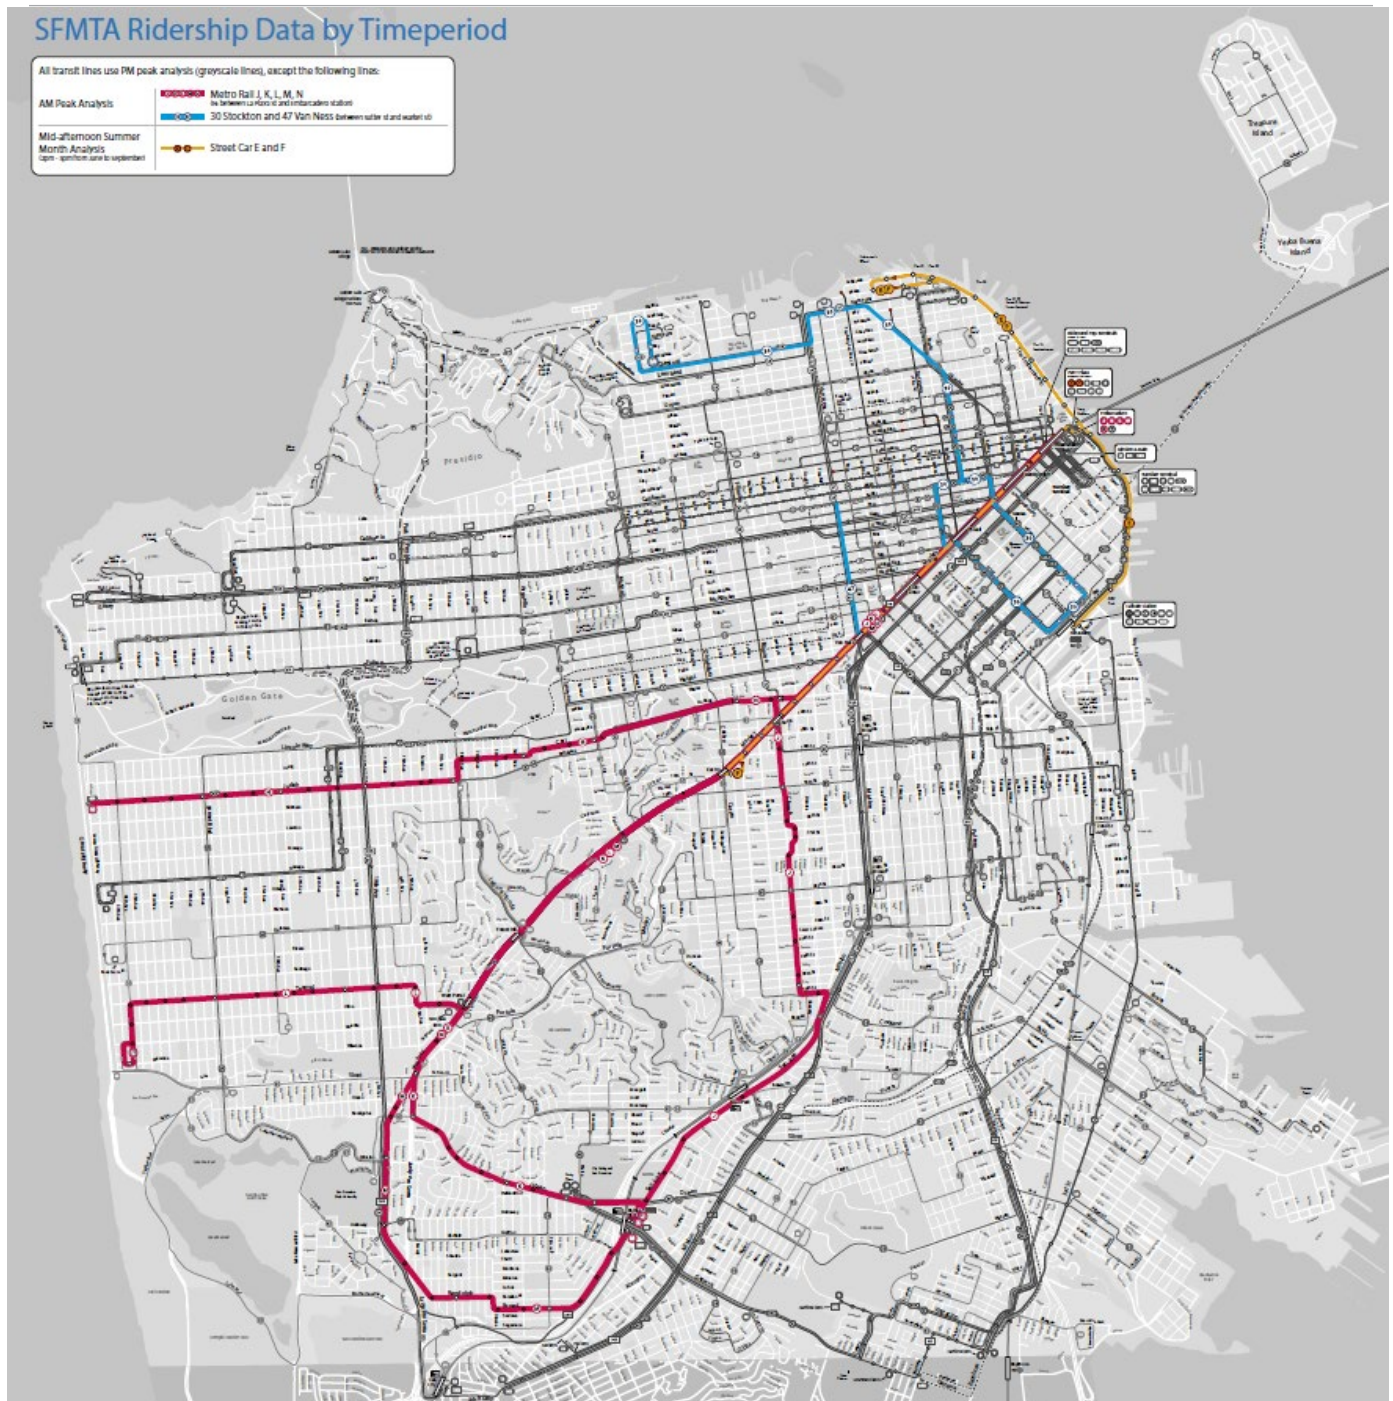

Route Name	Direction	Vehicle Capacity (Veh)	Maximum # of Vehicles (Veh)	Max. Load (Veh)	Capacity Utilization (%)	Cars per Hour	Station Load (Veh)	Net Capacity	Peak Hour Capacity	Peak Hour Load Factor (%)
1 Columbia	WESTBOUND	63	4.5	2.0	0.60	1	SACRAMENTO ST/STANISLAUS ST	474	474	65%
2 Central	WESTBOUND	63	10.0	2.0	0.45	1	SACRAMENTO ST/STANISLAUS ST	128	128	30%
3 Edison	WESTBOUND	63	10.0	2.0	0.30	1	SACRAMENTO ST/STANISLAUS ST	128	128	27%
4 Edison	WESTBOUND	63	1.0	2.0	0.02	1	MCALLISTER ST/STANISLAUS ST	402	402	17%
5 High/Paradise	WESTBOUND	63	10.0	2.0	0.30	1	HIGHT ST/STANISLAUS ST	53	128	30%
7 High/Paradise	WESTBOUND	63	10.0	2.0	0.45	1	HIGHT ST/STANISLAUS ST	112	128	30%
8 Jackson	SOUTHBOUND	63	1.0	2.0	0.02	1	GENESEE AVE/MISSION ST	112	112	60%
9 Jackson	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
10 Jackson	EAST ON THRUWAY SOUTH TO JENNEY	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	124	124	17%
11 Jackson/Paradise	EAST ON THRUWAY SOUTH TO JENNEY	63	10.0	2.0	0.30	1	PACIFIC AVENUE/STANISLAUS ST	103	203	60%
12 Jackson	SOUTHBOUND	63	10.0	2.0	0.30	1	STANISLAUS ST/STANISLAUS ST	103	103	30%
13 4th Ave	SOUTHBOUND	63	10.0	2.0	0.30	1	PACIFIC AVENUE/STANISLAUS ST	81	138	47%
14 4th Ave	SOUTHBOUND	63	10.0	2.0	0.30	1	STANISLAUS ST/STANISLAUS ST	103	103	30%
15 1st St	WESTBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
16 1st St	EAST ON THRUWAY EAST ON 16TH ST	63	4.0	2.0	0.07	1	PARADE ST/STANISLAUS ST	103	103	30%
17 1st St	WESTBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
18 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
19 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
20 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
21 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
22 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
23 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
24 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
25 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
26 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
27 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
28 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
29 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
30 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
31 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
32 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
33 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
34 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
35 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
36 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
37 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
38 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
39 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
40 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	PARADE ST/STANISLAUS ST	110	401	25%
41 1st St	WESTBOUND	63	1.0	2.0	0.02	1	GENESEE AVE/MISSION ST	112	112	60%
42 1st St	WESTBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
43 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
44 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
45 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
46 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
47 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
48 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
49 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
50 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
51 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
52 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
53 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
54 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
55 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
56 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
57 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
58 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
59 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
60 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
61 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
62 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
63 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
64 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
65 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
66 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
67 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
68 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
69 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
70 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
71 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
72 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
73 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
74 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
75 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
76 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
77 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
78 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
79 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
80 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
81 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
82 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
83 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
84 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
85 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
86 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
87 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
88 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
89 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
90 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
91 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
92 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
93 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
94 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
95 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
96 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
97 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
98 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
99 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%
100 1st St	SOUTHBOUND	63	10.0	2.0	0.30	1	GENESEE AVE/MISSION ST	112	112	60%

Route Name	Direction	Vehicle Capacity Trucks	Trucks per Hour	Max Load	Cars per Hour	Maximum Load/Truck	Truck Capacity	Passenger Capacity	Peak Hour Capacity
1. Center	EASTWARD	45	2.9	28	1	CALIFORNIA ST. ARLING ST	225	304	476
2. Center	EASTWARD	45	12.9	28	1	POPLAR BLVD. ST. BELLEVILLE ST	441	176	476
3. Center	EASTWARD	45	12.9	28	1	POPLAR BLVD. BROADWAY	441	176	476
4. Hub	EASTWARD	45	12.9	27	1	MCALISTER ST. ALMA ST	441	164	476
5. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
6. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
7. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
8. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
9. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
10. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
11. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
12. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
13. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
14. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
15. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
16. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
17. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
18. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
19. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
20. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
21. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
22. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
23. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
24. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
25. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
26. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
27. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
28. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
29. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
30. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
31. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
32. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
33. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
34. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
35. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
36. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
37. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
38. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
39. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
40. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
41. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
42. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
43. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
44. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
45. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
46. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
47. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
48. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
49. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
50. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
51. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
52. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
53. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
54. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
55. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
56. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
57. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
58. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
59. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
60. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
61. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
62. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
63. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
64. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
65. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
66. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
67. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
68. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
69. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
70. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
71. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
72. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
73. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
74. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
75. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
76. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
77. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
78. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
79. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
80. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
81. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
82. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
83. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
84. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
85. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
86. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
87. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
88. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
89. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
90. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
91. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
92. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
93. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
94. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
95. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
96. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
97. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
98. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
99. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476
100. Hub	EASTWARD	45	12.9	28	1	MCALISTER ST. SPRING	441	176	476

[illegible]

SFMTA Transit System Service Categories, Routes, and Designations

TABLE 4

Short Range Transit Plan Service Categories and Routes

Category	Description	Routes
Rapid Bus	These heavily used bus lines include some of the busiest routes in the Muni network. With wider stop spacing, vehicles arriving frequently and transit priority enhancements along the routes, the Rapid bus routes delivers speed and reliability whether customers are heading across town, or simply traveling a few blocks.	5R, 9R, 14R, 28R, 38R
Frequent	These routes combined with Rapid Bus create the Transit Priority Network. They also include transit priority enhancements and frequent service but with more stops along the route than the Rapid bus system.	1, 7, 8, 9, 14, 22, 28, 30, 38, 47, 49
Grid	These citywide routes combine with the Transit Priority Network to form an expansive core grid that lets customers get to their destinations with no more than a short walk, or a seamless transfer. Depending on demand, they typically operate less frequently than the Rapid and Frequent routes.	2, 3, 5, 6, 10, 12, 18, 19, 21, 23, 24, 27, 29, 31, 33, 43, 44, 45, 48, 54
Connector	These bus routes are shorter than the Citywide grid routes and predominantly circulate through San Francisco's hillside residential neighborhoods, filling in gaps in coverage and connecting customers to major transfer hubs, including Muni Metro and BART stations.	25, 35, 36, 37, 39, 52, 55, 56, 57, 66, 67
Specialized	These routes augment existing service during specific times of day to serve a specific need, or serve travel demand related to special events. They include AM and PM commute service, weekend-only service, and special event trips to serve sporting events, large festivals and other San Francisco activities	1AX, 1BX, 7X, 8AX, 8BX, 14X, 30X, 31AX, 31BX, 38AX, 38BX, 41, 76X, 81X, 82X, 83X, 88, NX
Owl	These bus routes operate every 30 minutes from midnight to 6 am, ensuring a basic level of access across the City 24 hours per day.	5, 14, 22, 24, 25, 38, 44, 48, 90, 91, L bus, N bus

Screening Criteria for Transit Delay Analysis - Supplemental Notes

The following subsections provided additional details supporting the transit delay screening criteria based on a threshold of significance of 4 minutes, or half-headway, if less. Assumptions used to quantify factors that lead to transit delay were determined. The expected number of inbound project vehicle trips at each project driveway during the peak hour that would meet the 4 minute threshold of significance was calculated.

Assumptions		Notes/Sources
Delay to each bus from turning vehicle	5 seconds	Based on observed travel time of 63 northbound buses on Mission between 14th and 15th, which cut off buses with green time were delayed by 2.5 seconds. July 5, 2018 for 4840 Mission Transportation Study. 5 seconds is applied conservatively.
# of buses that would be delayed by just project vehicle turning movements to trip 4 minutes	48 buses	240 seconds/5 seconds
Most buses running on any street in one direction in a given hour	31 or one per every 116 seconds	Between 5 and 6 PM in the predominant commute direction, streets with high amounts of transit service: Geary (31 buses), Stockton (31 buses), 3rd Street (29 buses), California (25 buses), Otis/Mission (24 buses) and Van Ness (16 buses). SFMTA, October 5, 2017 email for 30 Otis.
Delay associated with 31 buses	2.6 minutes or 155 seconds	31 buses * 5 seconds

Expected number of buses that would arrive during 200 inbound vehicle trips accessing the curb or driveway	18	Assumption 1) The time interval is finite and measures as 10 seconds long (assuming the vehicle clears the ~50 foot conflict area in 10 seconds yields a speed of 3.4mph). 2) That simultaneous bus and vehicle arrival into the conflict area only last 10 seconds. 3) Because of 1) and 2), the peak 1-hour in the denominator is expressed as 360 10-second intervals. 4) We then divide the number of inbound vehicle trips by the 360 to express the probability of a 10-second interval having an inbound vehicle trip. 5) Multiply that by the most number of buses running on any street (31) in a given direction during the PM peak to arrive at the number of buses that would arrive at the same time an inbound vehicle trip would access the driveway.
Expected number of buses that would arrive during 300 inbound vehicle trips accessing the curb or driveway	26	
Expected number of buses that would arrive during 350 inbound vehicle trips accessing the curb or driveway	31	
Expected number of buses that would arrive during 400 inbound vehicle trips accessing the curb or driveway	35	

Assuming that 350 inbound vehicle trips and the associated increase in walking trips would also delays those buses by 1.4 minutes, we landed on this screening criteria.

Quantitative Approaches to Transit Delay

EXAMPLE 1

Transit Cooperative Research Program 165 methodology.

The following subsections provided additional details regarding quantitative approaches to transit delay analysis. Given that quantitative transit delay analysis could require substantial inputs and data, the department will determine the need for this analysis early in the transportation review process.

- The analysis will quantify to what extent the Project would increase delay experienced by transit on the analysis corridors through the study area. The transit delay analysis will also quantify to what extent transit travel times would be improved by the proposed expanded and upgraded transit-only lanes.
- Data inputs will be gathered at both the individual stop-level and at the corridor-level. Much of the input data has already been collected. SFMTA will provide stop level boarding and alighting data. Plus project and cumulative intersection turning movement volumes will be estimated using the Furnessing method based on SF CHAMP model link volumes.

Inputs by Proposed Data Source

- o SFMTA Data Request
 - Average boarding volume per bus per stop
 - Average alighting volume per bus per stop
 - Scheduled buses per hour
 - Percent of boarders using farebox
 - Door opening and closing time
- o Observation/General Knowledge
 - Boarding door(s) [All]
 - Fare payment method [Smart Card]
 - Boarding height [Level, Stairs, Steep Stairs]
 - Standees present [Yes, No]
 - Number of doors
 - Available door channels
 - Number of loading areas
 - Loading area design [linear/non-linear]
 - Bus lane type
 - Running way type
 - Stop type [on-line/off-line]
 - Area type [metro CBD, metro non-CBD]
 - Stop location [near-side at signal, far-side at signal, influenced by signal, not influenced by signal]
- The consultant team will request feedback from SFMTA on all tool inputs prior to completing the analysis; although the tool provides default values for many operational measurements, SFMTA may have better, more locally-specific information that could improve accuracy of the tool. Example inputs include: max bus speed on the corridor during the PM peak hour, door opening and closing time, and percent of riders using the farebox.

-
- The tool outputs average route speed, in MPH, along the defined corridor. This will be easily be converted into travel time, in seconds. This tool will output changes in travel speed and changes in travel time. Therefore, the transit delay threshold, which is yet to be established for this project, should refer to one of these two metrics.

Outputs

- o Step 1: Average Dwell Time (seconds)
- o Step 2: Bus Stop Capacity (bus/hr) AND Bus facility Capacity (bus/hr)
- o Step 3: Average Travel Speed (mi/hr)

Quantitative Approaches to Transit Delay

EXAMPLE 2

Transit Delay Analysis Based on Three Components

The following paragraphs detail the methodology used to assess the delay that could potentially be experienced by transit vehicles along a study corridor.

Measures of Delay

The total transit vehicle delay was assumed to be comprised of the three following cumulative elements:

- **Transit Travel Delay** - The transit travel delay represented the additional time experienced by a transit vehicle as it travels between stops across one or more intersections in the corridor due to congestion caused by other vehicular traffic traveling parallel or perpendicular to the transit flow.
- **Transit Reentry Delay** - The transit reentry delay represented the wait for a sufficient gap in traffic flow to allow a bus to pull back into the travel lane.
- **Transit/Bicycle Delay** - The transit/bicycle delay represented the added time caused by the interaction between bicycles and transit vehicles as buses pull in or out of the bus stops.

The three components of the total transit delay were quantified as follows:

Transit Travel Delay

The transit travel delay was quantified using traffic operations data obtained from the intersection LOS calculations performed at study intersections along the corridor. The transit travel delay reflected the approach delay at the intersection for the direction of transit travel. For those intersections within a transit corridor that had not being analyzed for LOS purposes, the travel delay was estimated using the average of the delay (for each approach) for those locations where the intersection delay was available. Average approach delay for signalized and unsignalized intersections was estimated separately. Thus, the total transit travel delay in a transit corridor was calculated as the sum of all the approach delays at those intersections where LOS calculations were available, plus the number of signalized intersections multiplied by the average approach delay for signalized intersections, plus the number of unsignalized intersections multiplied by the average approach delay for unsignalized intersections. The transit travel delay was calculated separately for each direction of transit travel (i.e., eastbound and westbound, or northbound and southbound).

In several instances study intersections operate at LOS F, with average intersection delays above 80 seconds per vehicle and volume-to-capacity (v/c) ratios higher than 1.0, which represent the upper limits of the methodology used to estimate intersection delay. As shown in Figure V.A.3-3, p. V.A.3-16 adapted from the 2000 Highway Capacity Manual (Chapter 16, exhibit 16-14), that displays the relationship between the v/c ratio and the average intersection delay at a given intersection, the average delay increases very rapidly once a v/c value of 1.02 with an associated delay of 100 seconds is reached.

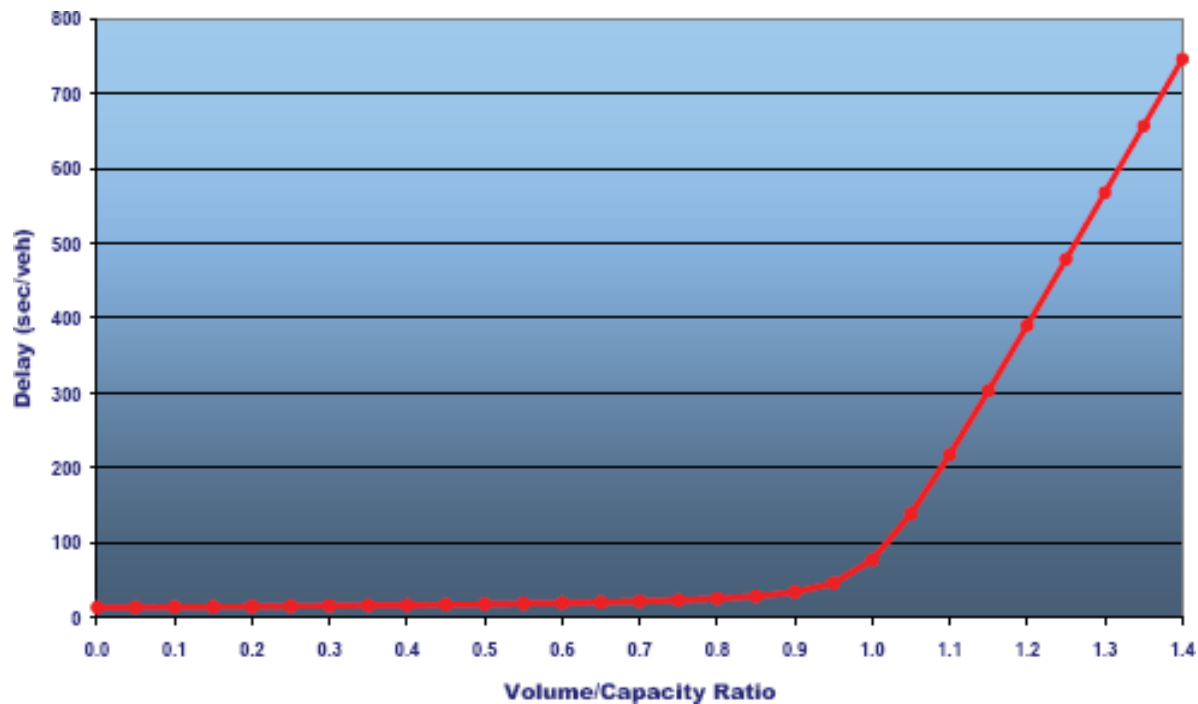


FIGURE V.A.3-3 SENSITIVITY OF VEHICLE DELAY TO VOLUME/CAPACITY RATIO

Source: 2000 Highway Capacity Manual, Chapter 16, exhibit 16-14.

As a result, the vehicle delay values estimated by the HCM methodology in those instances when the intersection operated at LOS F and had a v/c ratio well above 1.02, outside its range of application, would be unrealistically high. Thus, an adjusted methodology was used to calculate transit delays at those locations where the LOS degrades to F for the approach on which transit vehicles operate. The methodology had two components, one that was applied to each individual intersection on a transit corridor and another that was applied globally to each transit corridor.

Individual Intersection Delay Adjustments – Three possible cases occurred:


1. Intersection operated at LOS F with a calculated average delay of less than or equal to 100 seconds per vehicle – Used the average delay resulting from the application of the HCM methodology.
2. Intersection operated at LOS F with a calculated average delay greater than 100 seconds per vehicle and the v/c ratio is less than or equal to 1.02 – Assumed an additional 100 seconds of delay per vehicle to a base delay of 100 seconds. The total intersection delay in this case was 200 seconds per vehicle ($100 + 100 = 200$).
3. Intersection operated at LOS F with a calculated average delay greater than 100 seconds per vehicle and the v/c ratio was greater than 1.02 – Assumed an additional 140 seconds of delay to a base delay of 100 seconds. The total intersection delay in this case was 240 seconds per vehicle ($100 + 140 = 240$).

Corridor Delay Adjustments – Subsequently, additional adjustments were made to calculate the total delay along a transit corridor for those intersections that met any of the three cases noted above:

- a. In those instances where there were consecutive intersections operating at LOS F on a transit corridor, the intersection delay calculations was increased by a factor of 10 percent per intersection. For example if there were three consecutive intersections in a transit corridor that operated at LOS F and met the criterion noted under case 3 above, the total delay for these three intersections was increased by 30 percent. In this case, the total intersection delay for these three locations became 312 seconds per vehicle ($240 \times 1.3 = 312$).
- b. In those instances where there were transit-only lanes or other meaningful transit priority treatments, the transit travel delay calculated from above was decreased. Adjustments were generally made based on individual transit lane situations and other factors such as lane configurations, external (e.g., freeway) traffic, etc. As general guidelines, at those locations where transit lanes were regularly enforced, the transit travel delay was assumed to be very small. At those locations where there was no strong transit lane enforcement, a 50 percent adjustment was made to decrease the calculated transit corridor delay.

Transit Reentry Delay

The transit reentry delay at a given transit stop was estimated using empirical data presented in the 2000 Highway Capacity Manual (HCM). Figure V.A.3-4, p. V.A.3-18, summarizes the HCM data. The total transit reentry delay in a transit corridor was calculated as the sum of the individual transit reentry delays at each bus stop. The transit reentry delay was calculated separately for each way of transit travel (i.e., eastbound and westbound, or northbound and southbound).

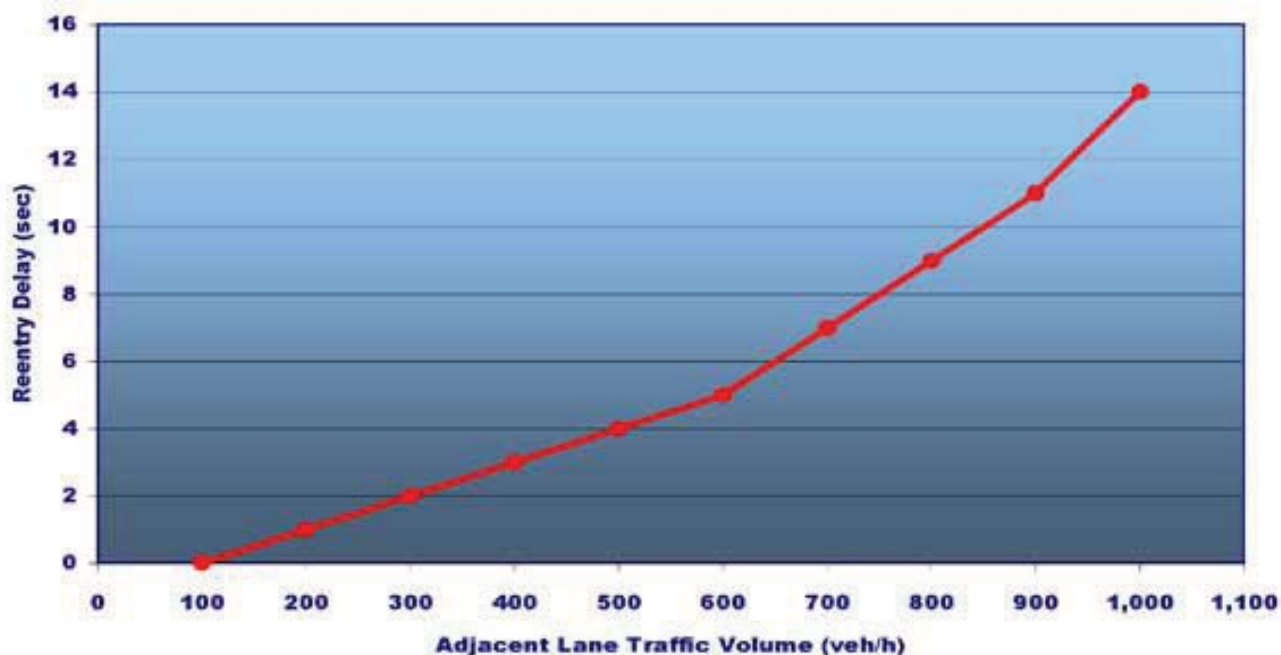

Transit/Bicycle Delay

Thorough analyses of the interaction between transit vehicles and bicycles operating on a parallel path do not exist.

The methodology described in the 2000 HCM as well as similar approaches developed by the Transit Cooperative Research Program (TCRP) and the Federal Transit Administration (FTA) to estimate transit service capacity reduction factors only evaluate a) the amount of motor vehicles traveling in the lane adjacent and to the left of a bus, and b) the number of vehicles turning right in front of a bus. In either case, the presence of bicycles is not accounted for in the calculation of the capacity reduction coefficients and it is assumed not quantifiable for the purposes of this study.

Implementation

The estimated total transit vehicle delay obtained following the methodology discussed above was then reviewed for reasonableness for each transit corridor. Any additional professional judgment factors used was also documented.

The average transit travel delay for the intersections without LOS delay data was estimated based on the average delay data obtained from those intersections where LOS calculation was conducted for the direction of transit travel. Similarly, the calculation of transit reentry delay required the estimation of traffic volumes on the adjacent travel lane using the data obtained from the intersection LOS calculations performed at study intersections along the corridor.

Transit Corridors without Study Intersections

There were some transit corridors without study intersections. No lane reductions or similarly substantial lane changes have been proposed on these corridors as part of the Bicycle Plan. Thus, the transit conditions on these corridors were evaluated qualitatively with a general description of the potential for transit delays.

Mitigation and Improvement Measures

1. MITIGATION MEASURES FOR LAND USE DEVELOPMENT PROJECTS LOCATED WITHIN AN AREA PLAN

Rincon Hill Plan

No applicable mitigation or improvement measures were identified.

Market and Octavia Neighborhood Plan

No applicable mitigation or improvement measures were identified.

Visitacion Valley Redevelopment Plan

No applicable mitigation or improvement measures were identified.

Balboa Park Station Area Plan

No applicable mitigation or improvement measures were identified.

Eastern Neighborhoods Rezoning and Area Plan

Mitigation Measure E-5: Enhanced Transit

Funding: As a mitigation measure to adequately serve increased transit demand generated by the Eastern Neighborhoods rezoning, ensure that sufficient operating and capital funding is secured. Mitigation may be achieved through some or all of the following measures:

- Establish an impact fee to supplement the current Transit Impact
- Development Fee on all new residential and non-residential development in the Eastern Neighborhoods.
- Establish other fee-based sources of revenue such as, for example, parking benefit districts.
- Establish a congestion-charge scheme for downtown San Francisco, with all or a portion

of the revenue collected going to support improved transit service on lines that serve downtown and the Eastern Neighborhoods.

- Seek grant funding for specific capital improvements from regional, state and federal sources.

Mitigation Measure E-6: Transit Corridor

Improvements: As a mitigation measure to accommodate project transit demand, provide improved transit service in corridors that are affected by new transit trips generated by the Eastern Neighborhoods rezoning and area plans. Corridors may include Mission Street between 14th and Cesar Chavez Streets, 16th Street between Mission and Third Streets, Bryant Street or other parallel corridor between Third and Cesar Chavez Streets, a north-south corridor through portions of SoMa west of Fifth Street, and service connecting Potrero Hill with

SoMa and downtown. Mitigation may be achieved through some or all of the following measures:

- Reduce headways on transit lines serving the Eastern Neighborhoods, so that capacity utilization factors meet Muni's capacity utilization standard of 85 percent. Candidate lines for changes to headways include those along the east-west corridors in the Mission District, especially where these corridors connect with BART and connect with the Showplace Square/Potrero Hill and Central Waterfront neighborhoods (such as the 22-Fillmore and 48-Quintara), along the north-south corridors that serve the eastern half of the Mission District and Showplace Square/Potrero Hill neighborhoods (such as the 9-San Bruno and the 27-Bryant), and lines linking the Market Street subway with East SoMa, with Mission Bay, and with Showplace Square. On some lines where peak load demand would be the greatest, peak period headways may be reduced by half (for example, on the 22-Fillmore and 9-San Bruno).
- Decrease travel times and improve reliability on transit lines through a variety of means, including transit-only lanes, transit signal priority, transit "queue jumps," lengthening of spacing between stops, and establishment of limited or express service.
- On key routes expected to carry a significant portion of new ridership generated by the Eastern Neighborhood rezoning and area plans (such as the 22-Fillmore between Market Street and the Central Waterfront, and the 9-San Bruno along Potrero Avenue) develop "premium" service such as a Bus Rapid Transit line or a corridor enhanced with high-level transit preferential treatments.

Mitigation Measure E-7: Transit Accessibility:

As a mitigation measure to enhance transit accessibility, establish a coordinated planning process to link land use planning and development in the Eastern Neighborhoods to transit and other alternative transportation mode planning in the eastern portion of the City. Mitigation may be achieved through some or all of the following measures:

- Implement the service recommendations from the Transit Effectiveness Project (TEP}, which is currently in progress. The TEP will focus on near-term and medium-term transit improvements.
- Implement recommendations of the Better Streets Plan that are designed to make the pedestrian environment safer and more comfortable for walk trips throughout the day, especially in areas where sidewalks, crosswalks and other realms of the pedestrian environment are notably unattractive and intimidating for pedestrians and discourage walking as a primary means of circulation. This includes traffic calming strategies in areas with fast-moving, one-way traffic, long blocks, narrow sidewalks and tow-away lanes, as may be found in much of South of Market.
- Implement building design features that promote primary access to buildings from transit stops and pedestrian areas, and discourage the location of primary access points to buildings through parking lots and other auto-oriented entryways.
- Implement key portions of the 2005 Bicycle Plan when it is ready for implementation, particularly along segments called out in the 2005 Bicycle Plan that close gaps in the bicycle network in the Eastern Neighborhoods.
- Develop Eastern Neighborhoods transportation implementation programs that manage and direct resources brought in through pricing programs and development-based fee assessments, as outlined above, to further the multimodal implementation and maintenance of these transportation network

Mitigation Measure E-8: Muni Storage and Maintenance:

As a mitigation measure to ensure that Muni is able to service additional transit vehicles needed to serve increase demand generated by development in the rezoned areas in the Eastern Neighborhoods, provide maintenance and storage facilities. Mitigation may be achieved through some or all of the following measures:

- Provide a portion of the cost of expanding or constructing a bus facility that may be linked to the increased demand created by land use development pursuant to the Eastern Neighborhoods rezoning and area plans.
- Employ transit-preferential treatments for non-revenue service where transit vehicle volumes are high, and where access to these facilities may be impaired by other traffic.

Mitigation Measure E-9: Rider Improvements:

As a mitigation measure to make it easy and comfortable to use transit service in the Eastern Neighborhoods, provide improved passenger information and amenities. Mitigation may be achieved through some or all of the following measures:

- Provide “Next Bus” type passenger information for all lines at key stops.
- Provide for facilities that allow cross-agency sharing of real time arrival information for transit vehicle operators where regional and local feeder transit agencies connect, but where operators do not have visual contact with each other or with the complete connection path that transferring passengers must make (for example, between BART and feeder buses, such as the 53-Southern Heights, which terminates at the 16th Street BART station and the 67-Bernal Heights, which terminates at the 24th Street BART station).
- Provide accurate and usable passenger information and maps.
- Provide adequate light, shelter and spaces to sit at all stops, with enhanced amenities at key stops.
- Encourage the consolidation of sheltered, well-lit, Next-Bus-served ground floor land uses open to the public for extended hours (e.g., cafes,

bookstores and institutional building lobbies) within immediate sightline/walking distance of major surface transit stations and stops to allow waiting transit customers options to sit in sheltered comfort, and to increase pedestrian activity and casual monitoring around the transit stations.

Mitigation Measure E-10: Transit Enhancement:

As a mitigation measure to minimize delays to transit vehicles due to projected traffic congestion, provide improved transit service in corridors that are subject to traffic congestion induced at least in part by the land use growth due to Eastern Neighborhoods rezoning and area plans. Mitigation may be achieved through some or all of the following measures:

- Reduce headways on transit lines serving Eastern Neighborhoods, including those corridors that connect with BART, AC Transit, SamTrans, Golden Gate Transit and Caltrain, to reduce the overall transit travel time for regional trips that when made by automobiles add to the congestion in the street grid and freeway ramp system in the Eastern Neighborhoods.
- Prioritize and expand the use of Transit Preferential Street technologies to prioritize transit circulation in the Eastern Neighborhoods.
- Improve and expand the use of programs that increase transit rider awareness, real-time connectivity and transfer reliability, such as Next Bus, and the display of schedules and maps.

results in the need to add additional vehicle(s) to one or more Muni lines, the Municipal Transportation Agency (MTA) could stripe a portion of the approach lane at applicable intersections to restrict traffic to buses only during the p.m. peak period, thereby allowing Muni vehicles to avoid traffic queues at certain critical intersections and minimizing transit delay. Each queue-jump lane would require the

**Treasure Island and Yerba Buena Island
Redevelopment Plan**

No applicable mitigation or improvement measures were identified.

Glen Park Community Plan

No applicable mitigation or improvement measures were identified.

Transit Center District Plan and Transit Tower

M-TR-3a: Installation and Operation of Transit-Only and Transit Queue-Jump Lanes: To reduce or avoid the effects of traffic congestion on Muni service, at such time as the transit-vehicle delay

prohibition of parking during the p.m. peak period for the distance of the special lane. For the 41 Union, MTA could install a p.m. peak-hour transit-only lane along Beale Street approaching and leaving the intersection of Beale/Mission Street, for a distance of 150 to 200 feet. Five parking spaces on the west side of Beale Street north of Mission Street could be eliminated when the transit lane is in effect to allow for a right-turn pocket. MTA could also install a p.m. peak-hour queue-jump lane on the eastbound Howard Street approach to the intersection of Beale/ Howard Streets, for a distance of 100 feet. If the foregoing were ineffective, MTA could consider re-routing the 41 Union to less-congested streets, if available, or implementing actions such as providing traffic signal priority to Muni buses.

(Golden Gate Transit and SamTrans) using the

For the 11-Downtown Connector and 12 Folsom Pacific, MTA could install a p.m. peak-hour queue-jump lane on the southbound Second Street approach to the intersection to the intersection of Second/Folsom Streets, for a distance of approximately 150 feet. When the lane is in effect, five on-street parking spaces on the west side of Second Street north of Folsom Street could be eliminated, as well as a portion of the southbound bicycle lane approaching the intersection. If the foregoing were ineffective, MTA could consider re-routing the 11-Downtown Connector and 12 Folsom to less-congested streets, if available, or implementing actions such as providing traffic signal priority to Muni buses.

The MTA could also evaluate the effectiveness and feasibility of installing an eastbound transit-only lane along Folsom Street between Second and Third Streets, which would minimize delays incurred at these intersections by transit vehicles. The study would create a monitoring program to determine the implementation extent and schedule, which may include conversion of one eastbound travel lane into a transit-only lane.

M-TR-3b: Exclusive Muni Use of Mission Street Boarding Islands: To reduce or avoid conflicts between Muni buses and regional transit service

relocated transit-only center lanes of Mission Street between First and Third Streets, MTA could reserve use of the boarding islands for Muni buses only and provide dedicated curbside bus stops for regional transit operators. Regional transit vehicles would still be allowed to use the transit-only center lanes between stops, but would change lanes to access the curbside bus stops. This configuration would be similar to the existing Muni stop configuration along Market Street, where two different stop patterns are provided, with each route assigned to only one stop pattern.

M-TR-3c: Transit Improvements on Plan Area

Streets: To reduce or avoid the effects of traffic congestion on regional transit service operating on surface streets (primarily Golden Gate Transit and SamTrans), MTA, in coordination with applicable regional operators, could conduct study the effectiveness and feasibility of transit improvements along Mission Street, Howard Street, Folsom Street, First Street, and Fremont Street to reduce delays incurred by transit vehicles when passing through the Plan area. The study would examine a solutions including, but not limited to the following:

- Installation of transit-only lanes along Howard Street and Folsom Street, which could serve both Muni buses (e.g., 12 Folsom-Pacific) and Golden Gate Transit buses heading to / from Golden Gate's yard at Eighth and Harrison Streets.
- Extension of a transit-only lane on Fremont Street south to Howard Street and installation of transit-actuated queue-jump phasing at the Fremont Street / Mission Street intersection to allow Golden Gate Transit buses to make use of the Fremont Street transit lane (currently only used by Muni vehicles); and
- Transit signal priority treatments along Mission, Howard, and Folsom Streets to extend major-street traffic phases or preempt side-street traffic phases to reduce signal delay incurred by SamTrans and Golden Gate Transit vehicles.
- Golden Gate Transit and SamTrans could consider rerouting their lines onto less-congested streets, if available, in order to improve travel times and reliability. A comprehensive evaluation would need to

be conducted before determining candidate alternative streets, considering various operational and service issues such as the cost of any required capital investments, the availability of layover space, and proximity to ridership origins and destinations.

M-TR-3d: Increased Funding to Offset Transit

Delays: Sponsors of development projects within the Plan area could be subject to a fair share fee that would allow for the purchase of additional transit vehicle(s) to mitigate the impacts on transit travel time. In the case of Muni operations, one additional vehicle would be required. For regional operators, the analysis also determined that on-street delays could require the deployment of additional buses on some Golden Gate Transit and SamTrans routes.

Funds for the implementation of this measure are expected to be generated from a delineated portion of the impact fees that would be generated with implementation of the draft Plan, and are projected to be adequate and sufficient to provide for the capital cost to purchase the additional vehicle and facility costs to store and maintain the vehicle.

M-TR-3e: Increased Funding of Regional Transit:

Sponsors of development projects within the Plan area could be subject to one or more fair share fees to assist in service improvements, such as through the purchase of additional transit vehicles and vessels or contributions to operating costs, as necessary to mitigate Plan impacts. These fee(s) could be dedicated to Golden Gate Transit, North Bay ferry operators, AC Transit, BART, and/or additional North Bay and East Bay transit operators. Depending on how the fee(s) were allocated, Caltrain and SamTrans might also benefit, although lesser impacts were identified for these South Bay operators.

Funds for the implementation of this measure are expected to be generated from a delineated portion of the impact fees that would be generated with implementation of the draft Plan, and are projected to be adequate and sufficient to provide for the capital cost to purchase the additional vehicle and facility costs to store and maintain the vehicle.

Western SoMa Community Plan

M-C-TR-2: Impose Development Impact Fees to Offset Transit Impacts: Additional transit capacity would be required in order to reduce the corridor impacts identified above for the Draft Plan, and reduce capacity utilization to levels below the 85 percent capacity utilization threshold. In order to increase capacity, however, additional funding would have to be identified, either from public or private sources, or a combination, thereof, potentially including project sponsors of individual development projects within the Draft Plan Area. Sponsors of development projects within the Draft Plan Area could be subject to a fair share fee that would pay for augmenting transit capacity. These funds would be used to purchase and operate additional transit vehicles, or if necessary, to reduce the corridor impacts, execute large-scale upgrades to transit network capacity.

Adoption of the Western SoMa Community Plan is anticipated to be accompanied by development impact fees, such as those adopted for the Eastern Neighborhoods Area Plan and Market/Octavia Area Plan. Funds are expected to be generated from a delineated portion of the impact fees that would be generated with implementation of the Draft Plan. However, it is not known whether or how much additional funding would be generated for transit service improvements, and no other definite funding sources have been identified. As a result, the Draft Plan's contribution to the 2030 Cumulative capacity utilization exceedances for Muni operations would remain significant and unavoidable.

Central SoMa Plan

Mitigation Measure M-TR-3a: Transit Enhancements: The following are City actions that would reduce local and regional transit impacts associated with implementation of the Central SoMa Plan and proposed street network changes.

- **Enhanced Transit Funding.** To accommodate project transit demand, the City shall ensure that sufficient operating and capital funding is secured, including through the following measures:
 - Establish fee-based sources of revenue such as parking benefit districts.
 - Establish a congestion-charge scheme for downtown San Francisco, with all or a portion of the revenue collected going to support improved local and regional transit service on routes that serve Downtown and the Central SoMa Plan Area.
 - Seek grant funding for specific capital improvements from regional, State and federal sources.
- **Transit Corridor Improvement Review.** During the design phase, the SFMTA shall review each street network project that contains portions of Muni transit routes where significant transit delay impacts have been identified (routes 8 Bayshore, 8AX Bayshore Express, 8BX Bayshore Express, 10 Townsend, 14 Mission, 14R Mission Rapid, 27 Bryant, 30 Stockton, 45 Union-Stockton, and 47 Van Ness). Through this review, SFMTA shall incorporate feasible street network design modifications that would meet the performance criteria of maintaining accessible transit service, enhancing transit service times, and offsetting transit delay. Such features could include, but shall not be limited to, transit-only lanes, transit signal priority, queue jumps, stop consolidation, limited or express service, corner or sidewalk bulbs, and transit boarding islands, as determined by the SFMTA, to enhance transit service times and offset transit delay. Any subsequent changes to the street network designs shall be subject to a similar review process.

- **Transit Accessibility.** To enhance transit accessibility, the Planning Department and the SFMTA shall establish a coordinated planning process to link land use planning and development in Central SoMa to transit and other alternative transportation mode planning. This shall be achieved through some or all of the following measures:
 - Implement recommendations of the Better Streets Plan that are designed to make the pedestrian environment safer and more comfortable for walk trips throughout the day, especially in areas where sidewalks and other realms of the pedestrian environment are notably unattractive and intimidating for pedestrians and discourage walking as a primary means of circulation. This includes traffic calming strategies in areas with fast-moving, one-way traffic, long blocks, narrow sidewalks and towaway lanes, as may be found in much of the Central SoMa area.
 - Implement building design features that promote primary access to buildings from transit stops and pedestrian areas, and discourage the location of primary access points to buildings through parking lots and other auto-oriented entryways.
 - Develop Central SoMa transportation implementation programs that manage and direct resources brought in through pricing programs and development-based fee assessments, as outlined above, to further the multimodal implementation and maintenance of these transportation improvements.
- **Muni Storage and Maintenance.** To ensure that Muni is able to service additional transit vehicles needed to serve increased demand generated by development in Central SoMa, the SFMTA shall provide maintenance and storage facilities. In 2013, the SFMTA prepared a Real Estate and Facilities Vision for the 21st Century report.¹ The document provides a vision for addressing Muni's storage and maintenance needs, particularly in light of substantial growth in fleet as well as changes in the fleet composition.

Mitigation Measure M-TR-3b: Boarding

Improvements: The SFMTA shall implement boarding improvements such as low floor buses and pre-payment that would reduce the boarding times to mitigate the impacts on transit travel times on routes where Plan ridership increases are greatest, such as the 8 Bayshore, 8AX/8BX Bayshore Expresses, 10 Townsend, 14 Mission, 14R Mission Rapid, 27 Bryant, 30 Stockton, 45 Union-Stockton, and 47 Van Ness routes. These boarding improvements, which would reduce delay associated with passengers boarding and alighting, shall be made in combination with Mitigation Measures M-TR-3c, Upgrade Transit-only Lanes on Third Street, M-TR-3d, Signalization and Intersection Restriping at Townsend/Fifth Streets, and M-TR-3e, Implement Tow-away Lanes on Fifth Street, which would serve to reduce delay associated with traffic congestion along the transit route.

Mitigation Measure M-TR-3c: Signalization and Intersection Restriping at Townsend/Fifth Streets:

The SFMTA shall design and construct a new traffic signal at the intersection of Townsend/Fifth Streets, and reconfigure the Townsend Street eastbound approach to provide one dedicated left-turn lane (with an exclusive left turn phase) adjacent to a through lane. This reconfiguration would require restriping of the two existing travel lanes at the eastbound approach to this intersection.

Mitigation Measure M-TR-3d: Implement Tow-away Transit-only Lanes on Fifth Street:

The SFMTA shall implement a northbound tow-away transit-only lane on Fifth Street between Townsend and Bryant Streets during the p.m. peak period to mitigate the impacts on transit travel times on the 47 Van Ness. This peak period transit-only lane can be implemented by restricting on-street parking (about 30 parking spaces) on the east side of Fifth Street between Townsend and Bryant Streets during the 3:00 to 7:00 p.m. peak period.

2. MITIGATION AND IMPROVEMENT MEASURE EXAMPLES FOR POTENTIALLY HAZARDOUS CONDITIONS

The following lists the typical types of measures that can mitigate or lessen impacts of potentially hazardous conditions to transit.

Potentially Hazardous Conditions	Measures
Inadequate Sightlines and visibility	<ul style="list-style-type: none">» Remove or relocate bus zone, bus stop shelter, loading, or parking spaces to increase sightline(s) and visibility;» Establish safe sight distances (e.g., daylighting, relocation of curb cuts or new structures)» Provide on-site signs promoting safety for people walking, bicycling, driving, or riding transit (e.g., signs at the garage exit reminding people driving to slow down and yield to people walking on the sidewalk), including where the slope or curvature of the right-of-way or driveway results in inadequate sightlines;
Inadequate transit facilities and/or potential conflicts with transit operations	<ul style="list-style-type: none">» Improve or provide adequate transit facilities adjacent to the project site, and/or network improvements such as transit bulbouts, between the project site and intersections, adjacent transit stations/stops, and other major destinations to meet Better Street Plan policies;» Relocate convenient off-street or on-street loading space(s) away from travel lane which transit operates in or at a transit stop/station location» Coordinate freight and service deliveries to reduce conflicts with transit facilities adjacent to on-site and off-site loading zones;
Hazardous vehicle turning movements	<ul style="list-style-type: none">» Signalize vehicle turning movements or restrict vehicle movements on red;» Employ Queue Abatement Measures or pursue design modifications to proposed garage or driveway entrances/exits to accommodate queuing vehicles (see next page for Queue Abatement Sample Language)

3. MITIGATION AND IMPROVEMENT MEASURE EXAMPLES FOR TRANSIT DELAY

Based on the report of delay identified, the following lists the typical SFMTA Travel Time Reduction Proposal Time-Savings (TTRP) Measures that could address transit delay. (See next page for definitions of TTRP measures).

Delay Type Addressed	TTRP Measures	Estimated Travel Time Savings (in seconds unless otherwise noted)
Traffic congestion delay	» Establish transit-only lanes	» 30
	» Establish transit queue jump/bypass lanes	» 5 – 30
	» Establish dedicated turn lanes	» 5
	» Widen travel lanes through lane reductions	» 5 – 30
	» Implement turn restrictions	» 5 - 30
	» Widen travel lanes through parking restrictions	» 5
	» Install traffic signals at all-way stop-controlled intersections	» 5 – 30
	» Replace all-way stop-controlled intersections with traffic calming measures	» 10 – 30
	» Install pedestrian bulbs	» 2
Passenger boarding/ alighting delay	» Install transit boarding islands	» 5
Re-entry delay	» Install transit bulbs	» 5
	» Install transit boarding islands	» 5
	» Convert flag stops to transit zones	» 5
	» Install pedestrian refuge islands	» 5
Other/multiple	» Remove or consolidate stops	» 5-30
	» Optimize transit stop locations at intersections	» 15-30
	» Extend transit zone to accommodate two vehicles at a time	» 2

Source: SFMTA Transportation Engineering. "Travel Time Reduction Proposals: Transit Preferential Toolkit," December 6, 2012

TRANSIT PREFERENTIAL TOOLKIT MEASURE DEFINITIONS

Measure	Definition
» Establish transit-only lanes	» “A transit-only lane is a travel lane that is dedicated for the exclusive use of transit vehicles.”
» Establish transit queue jump/bypass lanes	» “A transit queue jump/bypass lane allows transit vehicles to bypass general traffic stopped at a signalized intersection and move through the intersection with an exclusive traffic signal phase ahead of general traffic.”
» Establish dedicated turn lanes	» “Dedicated turn lanes can reduce transit travel times by providing a dedicated space for turning vehicles to queue at an intersection approach without blocking the thru-movement of transit vehicles and other traffic.”
» Widen travel lanes through lane reductions	» “Widening travel lanes can decrease transit travel times and improve reliability by reducing friction with other vehicles, eliminating the need for buses and other large vehicles to straddle two travel lanes and providing additional space for maneuvering around parking vehicles.”
» Implement turn restrictions	» “Turn restrictions can reduce transit travel times by preventing turning vehicles from blocking the thru-movement of transit vehicles and other traffic.”
» Widen travel lanes through parking restrictions	» “Widening travel lanes through parking restrictions can reduce transit travel times by eliminating the need for buses and other large vehicles to straddle two travel lanes, by reducing delays associated with parking maneuvers and by providing additional space for through-moving transit vehicles.”
» Install traffic signals at all-way stop-controlled intersections	» “Replacing all-way STOP sign intersection controls with traffic signals.”
» Replace all-way stop-controlled intersections with traffic calming measures	» “Removing STOP signs and adding traffic calming measures at intersection approaches with transit service can reduce transit travel time along a corridor by allowing transit vehicles to proceed slowly through intersections without coming to a complete stop.”

TRANSIT PREFERENTIAL TOOLKIT MEASURE DEFINITIONS

Measure	Definition
» Install pedestrian bulbs	» “Pedestrian bulbs are sidewalk extensions at non-transit stop intersection corners, typically about the same width as the adjoining parking lane.”
» Install transit boarding islands	» “Transit boarding islands are raised islands within the street that allow vehicles to use a center lane within the roadway to pick-up and drop-off customers at transit stops.” “Transit bulbs are sidewalk extensions at the location of a transit stop, typically about the same width as the adjoining parking lane.”
» Convert flag stops to transit zones	» “Converting flag stops to transit zones allows buses to pull into the zone to serve customers directly at the curb, rather than from the street.”
» Install pedestrian refuge islands	» “Pedestrian refuge islands are raised island in the street that provide space for pedestrians to wait while crossing a street.”
» Remove or consolidate stops	» “Consolidating transit stops involves removing two adjacent transit stops and establishing a new transit stop at an intermediate location.”
» Optimize transit stop locations at intersections	» “Placement of a transit stop either near or far-side at an intersection to reduce STOP sign or traffic signal delay.”
» Extend transit zone to accommodate two vehicles at a time	» “Providing sufficient space at transit stops to allow all doors of transit vehicles to align with curb or boarding island and to allow multiple transit vehicles to serve stops concurrently.”