October 3, 2018

Re: Potrero Power Station Design for Development Public Review Draft

Project Background

The enclosed document is the Public Review Draft of the Potrero Power Station Mixed-Use Development Project Design for Development (D4D) document. This document represents the vision for the redevelopment of the Potrero Power Station, which served as an important site for industry in San Francisco for the last 150+ years, so that it may begin a new chapter as a mixed-use neighborhood integrated into the San Francisco's Central Waterfront. The D4D is one component in a suite of project documents that includes the Infrastructure Master Plan and Development Agreement.

The owner and project sponsor of the Potrero Power Station, California Barrel Company, has worked in close coordination with multiple City agencies (including SF Planning, Office of Economic & Workforce Development, SF Recreation & Parks, SF Municipal Transit Agency, SF Public Utilities Commission, SF Public Works, SF Fire, SF Port, and others) since Spring 2017 to develop the project vision described in the Draft D4D. In addition to meeting regularly with neighborhood stakeholders and community organizations, they have held eight public community meetings during this time. As such, the Draft D4D represents the perspectives and voices of many key stakeholders. That said, the City and Project Sponsor continue to discuss numerous elements of the plan that require further review. Additionally, the City and Project Sponsor fully anticipate that community input on the enclosed draft document and will shape the project along with future drafts of the D4D.

Public Comment on the D4D

The public is invited to submit comments on the D4D Public Review Draft. They should be submitted via email at CPC.PPS-D4D@sfgov.org or via post at San Francisco Planning Department, c/o John M. Francis, 1650 Mission Street, Suite 400, San Francisco, CA 94103.

Public Hearings and Community Meetings on the D4D

Community meetings and public hearings to review and discuss the D4D will occur in late 2018 and early 2019. To receive notice of these meetings and other project updates by email, please sign up here.

Environmental Review

A Draft Environmental Impact Report (DEIR) for the project was published on October 3, 2018, and it can be found here. Please refer to the DEIR for directions on how to comment on that document.

For general questions or information on the project, please contact: John M. Francis, Senior Planner & Urban Designer San Francisco Planning Department john.francis@sfgov.org

1650 Mission St. Suite 400 San Francisco, CA 94103-2479

Reception: 415.558.6378

Fax: 415.558.6409

Planning Information: 415.558.6377



DESIGN FOR DEVELOPMENT

DRAFT: October 3, 2018





DESIGN FOR DEVELOPMENT

DRAFT: October 3, 2018

1	PROJECT OVERVIEW	7
2	TELLING OUR STORY: INTERPRETIVE MASTER PLAN	31
3	LAND USE	43
4	OPEN SPACE	53
5	STREETS	141
6	BUILDINGS	231
7	LIGHTING AND SIGNAGE	301
8	APPENDICES	317

User Guide

Document Content

The Design for Development (the "D4D") document of the Potrero Power Station (the "Power Station," "project site" or "site") governs the future development of the Power Station (the "Power Station project" or "project") and implementation of the Power Station's Special Use District (the "SUD"). The D4D establishes the design intent and prescribes design controls to direct development on the 29 acres that comprise the project site. General references to the "Power Station project" and "project" (defined above) are to be distinguished from references to a "building" or "building project," which term is intended to describe the construction of a building or group of buildings undertaken as a discrete project distinct from the overall Power Station project. The following sections are included in this document:

Section 1: Project Overview

Section 2: Telling Our Story: Interpretive Master Plan

Section 3: Land Use

Section 4: Open Space

Section 5: Streets

Section 6: Buildings

Section 7: Lighting and Signage

The Appendices contain supporting information for reference during implementation by designers, developers, and agencies:

Appendix A: Block Plan Guide

Appendix B: Transportation Demand Management

Appendix C: Sustainable Neighborhood Framework

Appendix D: Power Station Definitions

Appendix E: Applicable Planning Code Sections

Appendix F: Potrero Power Station Special Use District (SUD)

Standards, Guidelines, and Considerations

This D4D includes standards, guidelines and considerations. Standards and guidelines are requirements that govern the construction and modification of buildings, streets, and open spaces within the project site. Standards are quantifiable or objective requirements whereas guidelines are qualitative or subjective requirements, relating to matters such as the choice of building materials or fenestration. Guidelines support the described intent of the subject requirement. Each new building, street, and open space within the Power Station must meet the standards and guidelines prescribed herein unless modification to

these standards and/or guidelines are approved by the appropriate public bodies. The Potrero Power Station SUD (Appendix F) describes the procedure to modify the standards contained in the D4D.


Considerations are recommendations, advisory in nature, intended to further the objectives, principles, and values of this D4D. In addition to standards, guidelines and considerations, there are definitions included in certain sections and compiled in Appendix D: Power Station Definitions. These definitions are specific to the Power Station project, and further clarify the standards and guidelines to which they apply.

Relationship to the Planning Code

References to the Planning Code or Code herein are references to the City of San Francisco Planning Code as it exists as of the effective date of the Development Agreement. Refer to Appendix E for a list of the Planning Code sections that apply to the Power Station.

The D4D provides definitions for certain words and concepts that may differ from the meaning given to such words or concepts in the Planning Code (see Power Station Definitions, Appendix D). In the event definitions given and other provisions in this D4D directly conflict with those in the Planning Code, this D4D will control.



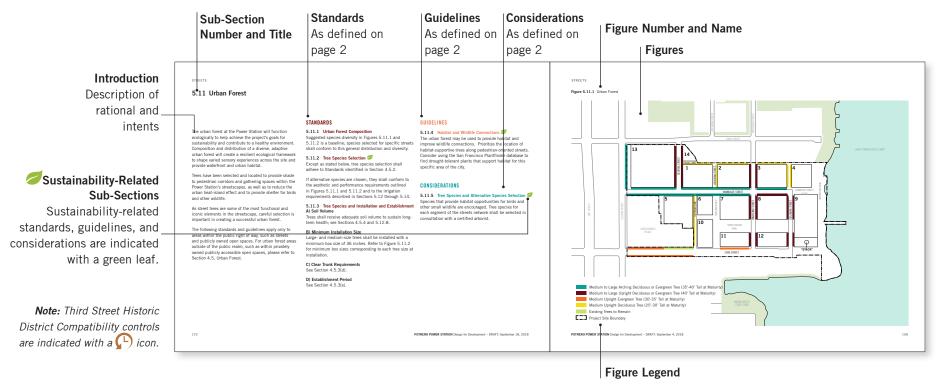

Companion Documents

In concert with the D4D, the Infrastructure Plan (the "Infrastructure Plan" or "IP") describes the infrastructure improvements required to support the Power Station project. The IP outlines the infrastructure elements related to the project's streets, open spaces, and utilities. It provides technical descriptions for how these elements are planned and identifies the responsible parties for design, construction and operation of the infrastructure. This includes information on the project's regulatory compliance, as well as approach to non-potable water and stormwater management for the site.

Interpretive Master Plan

Rather than providing a standalone document, the project has proactively provided an Interpretive Master Plan, incorporated as Section 2 of the D4D.

The Interpretive Master Plan outlines important stories relevant to the site's history and diagrammatically organizes them into a framework of interpretive experiences that will illustrate the Power Station's rich history, significance, and past functions to residents, employees, neighbors, and visitors. The design and implementation of the interpretive strategies identified within this document shall be consistent with the D4D and coordinated with the designs and designers of public areas and open spaces. The hierarchy, location, and expression of these interpretive experiences will be further refined during the project's implementation phase.

Sustainability and Transportation

The project takes an integrated approach to sustainability and transportation planning by incorporating these elements into the D4D, rather than treating them as standalone documents. The controls pertaining to sustainability and transportation are integrated as standards and guidelines throughout the D4D.

The controls related to the circulation aspects of transportation are mainly in Section 5: Streets, and those related to buildings (such as parking) can be found in Section 6: Buildings. The Power Station is committed to sustainability and minimizing the project's impact on traffic congestion. As such, the project includes a robust Transportation Demand Management ("TDM") Plan (Appendix B) compliant with Planning Code Section 169. TDM measures within the Plan are also embedded throughout Sections 5 and 6.

All environmental sustainability information, standards, and guidelines have been integrated into this D4D. Sustainability-related standards, guidelines, and considerations are indicated with a green leaf: Appendix C includes the sustainability neighborhood framework for the project.

Reviewing Agencies

The table below indicates the different agencies involved in review during implementation of the various elements of the D4D and IP.

 Table 1.1.1
 Matrix of Reviewing Agencies

= Reviewing Agency

	SF PLANNING	SFMTA	SFDPW	SFPUC	SFFD	DBI	PORT
DESIGN FOR DEVELOPMENT (D4D)							
01 Project Overview	•						
02 Interpretive Master Plan	•						
03 Land Use	•						
04 Open Space ¹	•						•
05 Streets	•	•	•		•		
06 Buildings	•						
07 Lighting and Signage	•			•			
INFRASTRUCTURE PLAN							
01 Introduction	•			•			
02 Sustainability	•			•			
03 Environmental Management				•			
04 Site Demolition	•					•	
05 Site Resilience ¹	•			•			•
06 Geotechnical Conditions	•		•			•	
07 Site Grading						•	
08 Street and Transportation Systems	•	•	•		•		
09 Open Space and Parks ¹	•						•
10 Utility Layout and Separation				•			
11 Low-Pressure Water System				•			
12 Non-Potable Water System				•			
13 Auxiliary Water Supply System				•			
14 Separated and Combined Sewer System				•			
15 Stormwater Management System	•			•			

^{1.} Per Figure 1.2.1, SF Port has jurisdiction over certain waterfront spaces. The Port will thus be involved in the review of said spaces and their resilience against sea level rise during implementation - as described in this Design fro Development document and associated Infrastructure Plan.



PROJECT OVERVIEW

1.1	Project Vision	9
1.2	Site Context	12
1.3	Site History	14
1.4	Planning Context	16
1.5	Project Principles	20
1.6	Design Framework	22



1.1 Project Vision

The Power Station will be a vibrant new neighborhood that seamlessly connects with Dogpatch, Pier 70, and the Central Waterfront as a whole.

The Power Station will be a place for Dogpatch residents and all San Franciscans to access the Central Waterfront, drawing people to a place of arrival at an active, urban water's edge, through a network of streets designed for safe and easy use by those on foot, bicycle, or transit.

It will be a neighborhood alive with places to live, work, shop, and enjoy culture. A series of open spaces will offer opportunities for active recreation, passive contemplation, and everything in between.

The 300-foot-tall "Stack" is an icon for the Central Waterfront. It will stand side-by-side with elegant new buildings that enliven and anchor the public realm, a tangible expression of the site's story arc – from a polluting power plant to a sustainable, resilient neighborhood that embraces wellness.



Community Outreach Themes

The community outreach process was a comprehensive multi-year community effort that revealed a series of themes and observations critical to the users and neighbors of the Power Station, shown in Figure 1.1.1. Ranging from program and density ideas to qualitative observations of the diversity and culture in place, these collective goals guided the development of the series of principles that inform and guide the urban design and place-making of the Power Station.



Figure 1.1.1 Community Feedback Summary

1.2 Site Context

The site is located in the Dogpatch neighborhood of San Francisco, which is characterized by large industrial warehouses near smaller, single-family homes. This mix and adjacency of uses gives Dogpatch its unique urban fabric, and has given rise to a community that is rich with arts and industry. The American Industrial Center buildings west of the project site shown in Figure 1.2.1, serve as an anchor for a community of local artisans and craftspeople.

Large industrial users remain active in the area, particularly along the waterfront, where notable neighbors include the Pier 70 Shipyard and Pier 80, both of which are major Port of San Francisco operations. The character of the waterfront in this area is undergoing a substantial transformation, as Crane Cove Park will soon connect Dogpatch to the waterfront with a significant open space that provides water access for kayaks and other small craft. See Figure 1.2.2 for a map of existing land uses that surround the site.

Another significant aspect of the site's context is the development of Pier 70. The Pier 70 project, which reimagines 35 acres of land owned by the Port of San Francisco, lies immediately north of the Power Station and shares a boundary along newly proposed Craig Lane. Pier 70 will contribute to the neighborhood a significant amount of housing and jobs within a grid of walkable blocks, as well as waterfront connections and open space. A cluster of historic buildings comprises a character-defining element of Pier 70; these include Building 12, which will be home to a market-hall of small-scale "makers" and artists. The diagram in Figure 1.2.3 shows the contextual relationship of the future build-out of the Power Station to the plans for Pier 70.

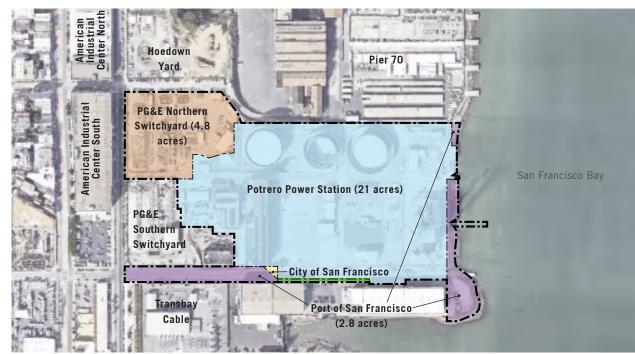


Figure 1.2.1 Site Boundaries and Ownership

The western end of the Power Station site is characterized by two PG&E switchyards: the northern switchyard, which is within the SUD's boundary, and the southern switchyard, which is not. To the south of this lies the Transbay Cable site. Through streetscape improvements that provide wide, welcoming sidewalks and parking-protected bicycle lanes, this D4D addresses the challenging entrance posed by the Transbay Cable and PG&E Southern Switchyard sites.

The site itself comprises the properties of four different owners (see Figure 1.2.1). The 21-acre parcel that was

the former Potrero Power Station is developer-owned; the 4.8-acre parcel currently used as a switchyard is owned by PG&E; sections of 23rd Street and the waterfront totaling 2.8 acres are owned by the Port of San Francisco, and are subject to the State Lands Trust; and a small triangle of land along 23rd Street is owned by the City of San Francisco.

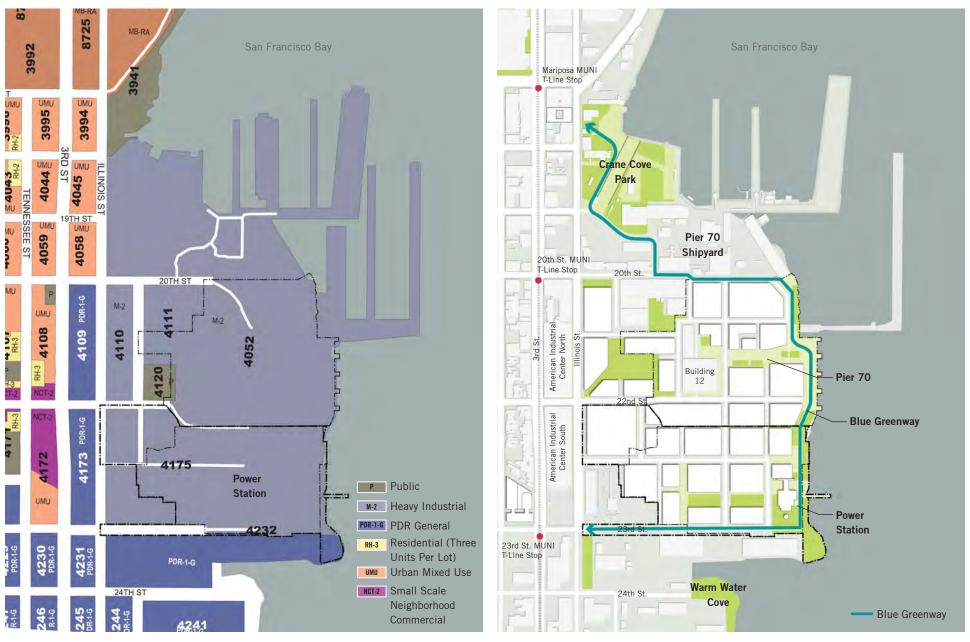


Figure 1.2.2 Surrounding Land Uses

Figure 1.2.3 Future Open Space Network and Blue Greenway

1.3 Site History

This site was historically a peninsula of land called Potrero Point, unlike other portions of the Central Waterfront that are primarily filled-in marshlands.

The site's high elevation next to a deep-water port in the southern part of San Francisco made the site ideal for industrial uses. Many kinds of industry thrived here, including gunpowder and cordage manufacturing, iron smelting and rolling, and barrel-making. In 1881, Claus Spreckels established his own refinery for sugar shipped here from Hawaii, taking advantage of the site's existing sugar warehouses, manufacturing infrastructure, and waterfront access. He built the site's first power plant, Station A, in 1901 to support sugar refinery operations; by 1905, it was producing the majority of San Francisco's power, and was acquired by PG&E. From historic photos, it is evident that this site was developed with density and height long before any of the other uses in the Central Waterfront came into being.

Station A was renovated in the 1930s and began using more natural gas than manufactured gas. In the 1960s, PG&E added the Unit 3 Power Generating Station ("Unit 3") to the site. Up until its closure in 2011, the Potrero Power Station site was responsible for generating approximately one-third of San Francisco's power. Figure 1.3.1 shows a composite image of these various eras in the history of the Power Station site.

After more than a century of industrial use, the plant eventually outlived its practical utility, as the city moved toward more efficient and environmentally friendly technologies. Once critical to San Francisco's power network, the plant gave way to off-site power generation, allowing the facility to be decommissioned—and the city of San Francisco to embrace an exciting new chapter for this unique waterfront location.










- 1. 1929 aerial of site shows dense build-out before the development of the rest of Dogpatch.
- 2. A view of the 180-foot warehouse building, demolished in the 1980s, that existed adjacent to Station A.
- 3. 20th and Indiana streets, circa 1940. The American Industrial Center (North Building) stands between the viewer and the site
- 4. 1964 photo of Unit 3 and the Stack, constructed by PG&E to provide power to much of San Francisco.

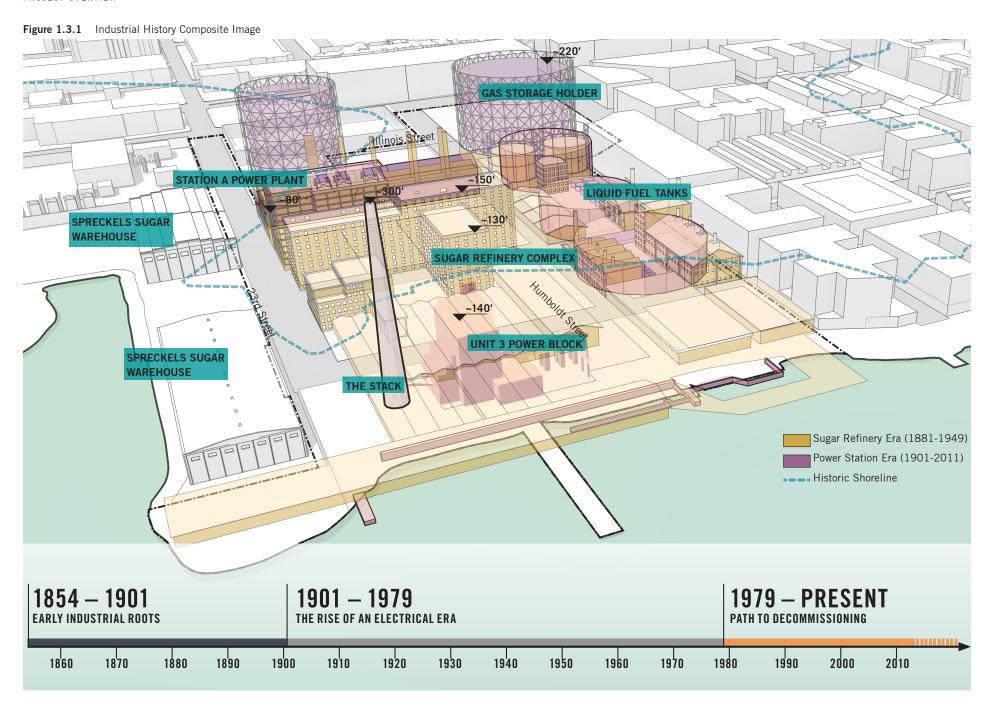

1.4 Planning Context

Eastern Neighborhoods Plan (2009)

Based on more than a decade of community input and technical analysis, the *Eastern Neighborhoods Plan* calls for transitioning about half of the existing industrial areas in the plan area (see Figure 1.4.1) to mixed-use zones that encourage new housing. The remaining half would be reserved for Production, Distribution, and Repair (PDR) districts, where a wide variety of functions, such as Muni vehicle yards, caterers, and performance spaces can continue to thrive. The Power Station site was specifically called out for rezoning in the Eastern Neighborhoods Plan.

Central Waterfront Area Plan (2008)

In addition to the Eastern Neighborhoods-wide objectives outlined above, the following goals were developed specifically for the Central Waterfront, over the course of many public workshops:

- Encourage development that builds on the Central Waterfront's established character as a mixed-use, working neighborhood.
- Foster the Central Waterfront's role in San Francisco's economy by supporting existing and future PDR and maritime activities.
- Increase housing in the Central Waterfront without impinging on or creating conflicts with identified existing or planned areas of PDR activities.
- Establish a land use pattern that supports and encourages transit use, walking, and bicycling.
- Better integrate the Central Waterfront with the surrounding neighborhoods and improve its connections to Port land and the water's edge.
- Improve the public realm so that it better supports

new development and the residential and working population of the neighborhood.

Better Streets Plan (2010)

The Better Streets Plan was adopted in 2010 to support the City's goals to create complete streets with enhanced streetscape and improved pedestrian and bicycle facilities. It classifies public streets and rights-of-way and creates a unified set of standards, guidelines, and implementation strategies that govern how the City designs, builds, and maintains its public streets and rights-of-way to achieve these goals. Major project concepts applicable to the Better Streets Plan include:

- Pedestrian safety and accessibility features, such as enhanced pedestrian crossings, corner or midblock curb extensions, pedestrian countdown and priority signals, and other traffic calming features.
- Universal pedestrian-oriented streetscape design with incorporation of street trees, sidewalk plantings, streetscape furnishing, street lighting, efficient utility location for unobstructed sidewalks, shared single surface for small streets/alleys, and sidewalk/median pocket parks.
- Integrated pedestrian/transit functions using bus bulb-outs and boarding islands (bus stops located in medians within the street).

Pier 70 Special Use District (Pier 70 SUD) (2018)
To the immediate north of the site is Pier 70, described by the Pier 70 Special Use District (the "Pier 70 SUD"), which was adopted in 2018. See Planning Code Section 249.79. The site is roughly 35 acres, approximately nine acres of which will be open space. The plan anticipates between 1,645 and 3,025 units

of housing, and between 1.1 and 2.2 million square feet of commercial development. Design standards and guidelines governing the development of Pier 70 are contained in the Pier 70 SUD Design for Development document.

Bay Conservation and Development Commission (BCDC) BCDC has jurisdiction over the portion of the project site located within 100 feet inland of the mean high tide line. The proposed project would require BCDC approval of activities within this area. Because only recreational use, hotel, open space, and public access are proposed for the portions of the project site within the shoreline band, the project will not conflict with the Bay Plan or BCDC regulations. However, BCDC will make the final determination of consistency with Bay Plan policies for the portions of the project site that are within its permit jurisdiction.

Public Trust Doctrine

The public trust doctrine is the principle that certain natural and cultural resources (especially waterways) are per se the collective property of the public, and that the government owns and must protect and maintain these resources for the public's use. California's State Lands Commission governs the doctrine's application in the state, managing 4 million acres of tide and submerged lands and the beds of navigable rivers, streams, lakes, bays, estuaries, inlets, and straits. The State Lands Trust ensures that land that adjoins the State of California's waterways, or is actually covered by those waters, be committed to water-oriented uses. Only those portions of the site that are Port property are subject to the State Lands Trust.

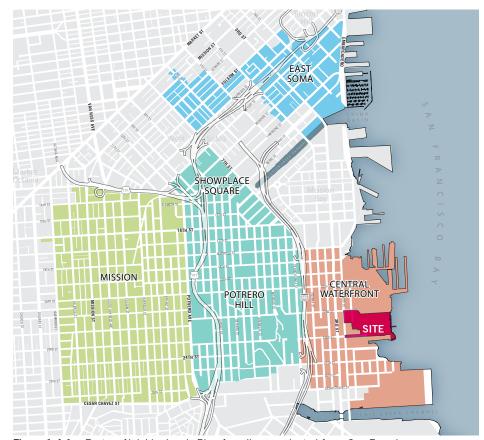


Figure 1.4.1 Eastern Neighborhoods Plan Area (image adapted from *San Francisco Eastern Neighborhoods Plan*, 2009)



Figure 1.4.2 BCDC Jurisdiction Line

Army Corps of Engineers

The project shoreline improvements Bay-ward of the high tide line are subject to the permitting jurisdiction of the U.S. Army Corps of Engineers.

Third Street Industrial District

The site lies within the Third Street Industrial District (see Figure 1.4.3), and is a sub-district of the Central Waterfront Historic District (also known as the Potrero Point Historic District). The Third Street Industrial District is an historic district initially identified in the 2001 Central Waterfront Historic Resources Survey Summary Report, and in 2008 was fully documented by Kelley & VerPlanck and Page & Turnbull. The district is eligible for listing in the California Register. The boundary of the Third Street Industrial District extends west from the project site along 23rd Street, and runs north along Third and Illinois streets, roughly between 18th and 24th streets. The original period of significance of the Third Street Industrial District was 1872 to 1958, with the end date being 50 years prior to the district designation. The Historic Resource Evaluation for the Power Station project extended the period of significance to 1965. The Historic Resource Evaluation Response noted that 1965 was "the start of the decline in manufacturing and industry in the area and therefore marks another potential date for the district's period of significance." The change in end-date resulted in the addition to the district of two contributing buildings that were not previously evaluated: Unit 3 and the Boiler Stack, both constructed in 1965.

Some of the character-defining features of the Third Street Industrial District are a high concentration of manufacturing, repair, and processing plants; warehouses of industrial character; and long-present industries dependent on the nearby waterfront and the freight-hauling Santa Fe Railroad trains that ran along Illinois Street, and buildings with the following typical features: brick and concrete construction, one to four stories in height, flat roofs, ornamented parapets, steel-sash and wood-sash windows, rectilinear and arched window openings, American Commercial style. Figure 1.4.2 shows the location of the Third Street Industrial District and the buildings that are contributors of significance to the district's historic resources, including contributors on the project site.

To ensure that the Power Station's buildings, streetscape and relevant open spaces are consistent with the historic district, Third Street Historic District Compatibility controls have been developed and are included in this D4D. Such controls are indicated with a () icon.

Union Iron Works Historic District

The United Iron Works (UIW) Historic District abuts the Third Street Industrial District along the northern boundary (Figure 1.4.4), and includes 66 acres of the 69- acre Pier 70 Area. It was listed in the National Register of Historic Places in 2014, as recommended in the Port Master Plan. The UIW Historic District consists of buildings, piers, slips, cranes, ship repair activities, and landscape and circulation elements that are associated with steel shipbuilding. The UIW Machine Shop, built in 1884, was the first to be built on-site during a period of industrial architecture ending with World War II.

San Francisco Bay Trail / Blue Greenway

The Blue Greenway, a City of San Francisco project, is meant to improve the city's southerly portion of the 500-mile, nine-county regional Bay Trail, as well as the Bay Area Water Trail and associated waterfront open space system. The San Francisco Bay Trail / Blue Greenway (referred to in this plan as "the Blue Greenway") will expand recreational and water-oriented activities and green corridors connected to surrounding neighborhoods. Public open spaces proposed at the Power Station will be part of this network.

The main spine of the Blue Greenway adjacent to the project site runs down Illinois Street. The Pier 70 project adds a "recreational loop" from Illinois Street out to the waterfront, stopping at the northerly edge of the Power Station site. The Power Station will continue this trail along the waterfront, creating pedestrian and bicycle connections to Illinois Street along 23rd Street, and terminating the recreational loop at the existing Blue Greenway. Additionally, the project leaves open the opportunity to extend the Blue Greenway along Warm Water Cove south of 23rd Street, allowing for a continuous waterfront trail. See Figure 1.4.4 for an illustration of the path of the Blue Greenway and its recreational loops.



Figure 1.4.3 Third Street Industrial and Union Iron Works Historic Districts



Figure 1.4.4 San Francisco Bay Trail / Blue Greenway (referred to in the D4D as "the Blue Greenway")

1.5 Project Principles

The Power Station is a portion of the waterfront that has always serviced San Franciscans but remained inaccessible to members of the public for more than 150 years. The following principles guide the site's reintegration into and restoration of the fabric of San Francisco, while celebrating the site's industrial past and providing much needed uses to the city, such as open space and housing. Principles 1-7, relating to the

physical development of the site, can be found embedded throughout the document. Since Principle 8 does not guide the project's design, it is not explicitly articulated in this Design for Development document. However, the principle is integral to the site's development and included below.



PRINCIPLE 1
Design a unique public
waterfront that emphasizes
and connects active uses.



PRINCIPLE 2

Accommodate needed growth in the city while creating a diversity of uses that can support a lively, livable, and inclusive neighborhood.



PRINCIPLE 3
Celebrate the site's rich industrial history.



PRINCIPLE 4
Establish an accessible neighborhood that prioritizes walking, biking, and transit.



PRINCIPLE 5

Contribute well-designed parks and recreational facilities that will complement the existing neighborhood and citywide open space network.



PRINCIPLE 6

Design a neighborhood that is context-appropriate, diverse, and human-scale.



PRINCIPLE 7


Create a healthy, resilient, and environmentally innovative development that embraces wellness.



PRINCIPLE 8

Develop a financially feasible project that can deliver the benefits promised to the community and the city.

1.6 Design Framework

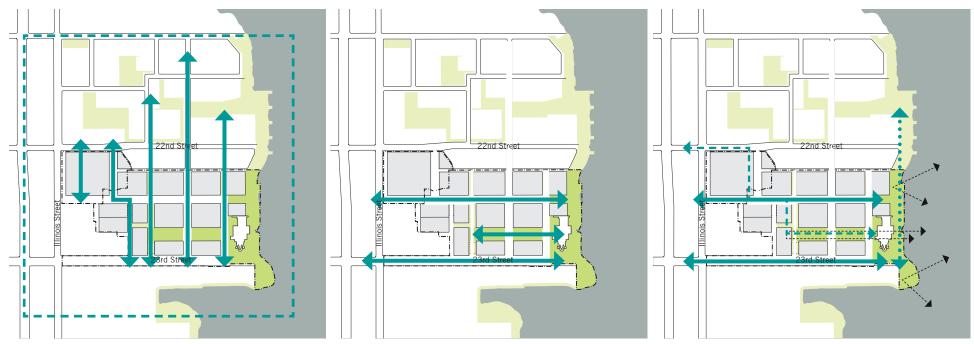

A Unified, Connected Neighborhood

The first consideration in establishing the urban design framework was to maximize connectivity with the north-south linkages of Pier 70, creating a continuous, legible single neighborhood.

Walkable, and Human Scale

The framework continues 23rd Street and Humboldt Street through the site, carrying these connections all the way to the waterfront. A third east-west connection was introduced to scale down blocks further, for an inviting, walkable grid of streets and open spaces.

Unmistakably a Waterfront Place

The site will offer expansive waterfront access. All roads at the Power Station lead to the Bay. Streets will invite all modes to access the Blue Greenway, and parks will feature open views across the water to the hills beyond.

Land Use

The Power Station is a mixed-use project providing residential units; commercial and laboratory space; production, distribution, and repair; retail; and open spaces. The project will provide a variety of housing types, including affordable and workforce housing, to create a diverse and family-friendly neighborhood. A variety of neighborhood-serving retail, services, and amenities will be provided within convenient walking distance of housing and offices on the site. Land uses will be balanced and distributed so that they work together to create a complete, round-the-clock neighborhood. Figure 1.6.1 illustrates the project's approach to the distribution of land uses.

The land use framework is based on Principles 2 and 6.

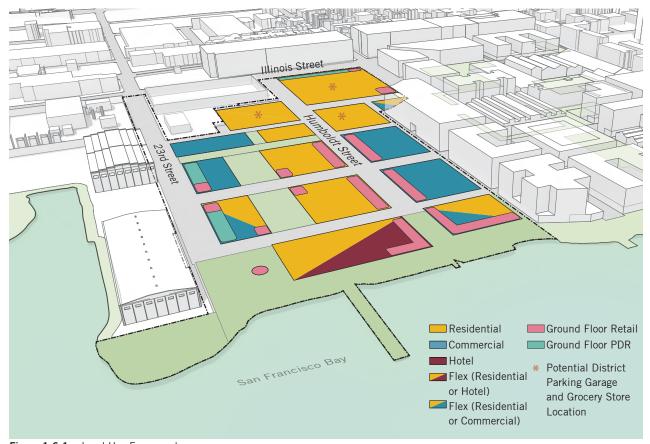


Figure 1.6.1 Land Use Framework

Waterfront and Open Spaces

The Power Station will join a connected network of waterfront parks and open spaces that includes Crane Cove Park, Warm Water Cove, the Blue Greenway and those at Pier 70, opening this portion of the Central Waterfront to public access and enjoyment for the first time in 150 years.

The Power Station will provide a variety of recreational uses on the Central Waterfront, including a rooftop soccer field, playgrounds, and other amenities that support active recreation and wellness. Parks are programmed with all potential users in mind, accommodating a variety of abilities and interests. Figure 1.6.2 illustrates the series of open spaces throughout the site and how they connect.

The waterfront will comprise a series of active spaces, enlivened by the proposed hotel and restaurants. A recreational dock will provide direct access to the water, while carefully designed moments along the Blue Greenway will provide places to enjoy sweeping views of the Bay. The Point will be a quieter place for picnicking and adventure play, and the Blue Greenway will provide a critical link along the waterfront for pedestrians, cyclists, visitors, and residents alike.

Power Station Park will offer a neighborhood gatheringplace similar to South Park, which balances the dynamism of flexible open spaces with the attraction of specific activities for all age groups (such as seating areas, play structures, etc.). Surrounding ground-floor uses will activate these open spaces day and night, during the week, and on weekends. The open space framework is based on Principles 1 and 5.


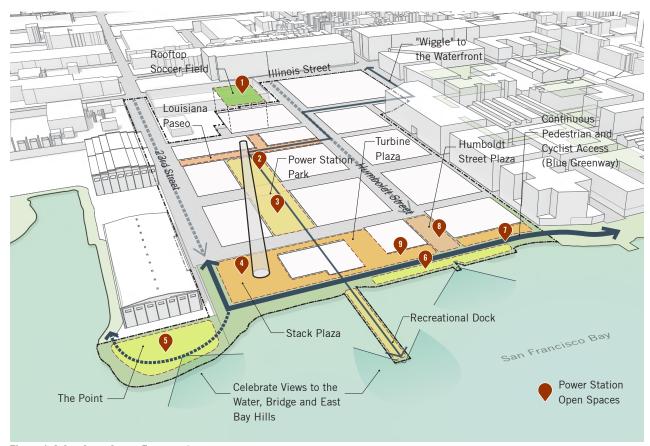


Figure 1.6.2 Open Space Framework

Images at right demonstrate the range of potential recreational and active uses corresponding to the numbered open space areas in Figure 1.6.2, including flex fields for soccer and yoga, formal play structures, adventure play spaces, social games, and adult fitness facilities.



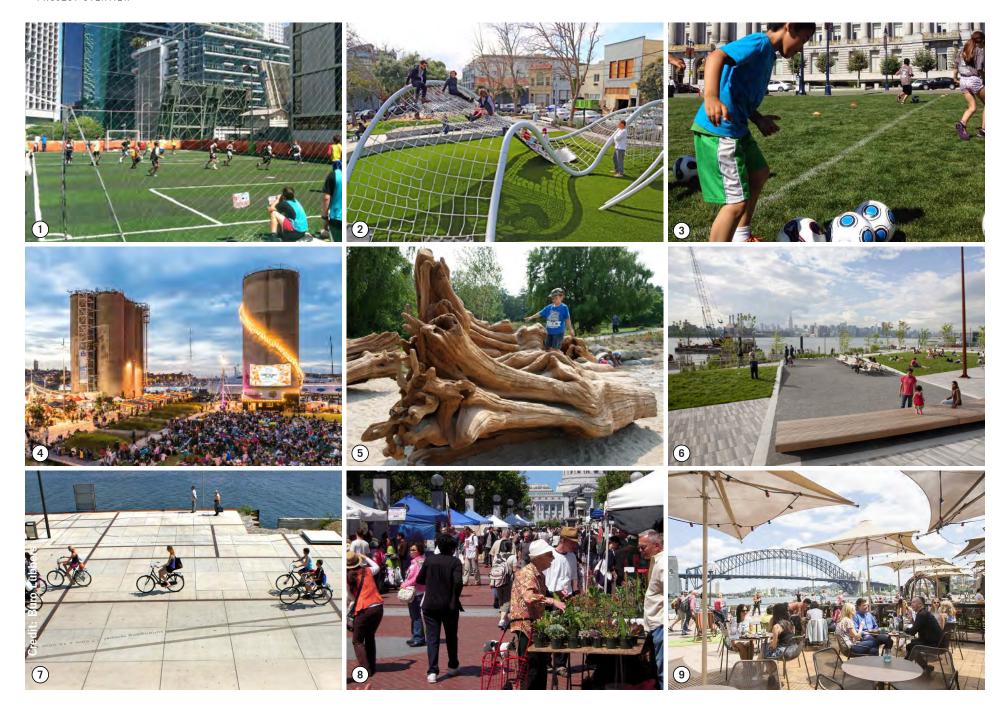

Complete Streets

City policy calls for a shift to active modes of travel, such as walking, biking, and transit, which reduce congestion and emit fewer greenhouse gases.

Additionally, San Franciscans increasingly demonstrate a preference for sustainable transportation modes, owning fewer cars and taking fewer car trips.

There are several existing plans that together will help to reduce automobile use at the Power Station. These include increased service and capacity on the Muni T-Line, a new bus line that will terminate at the site, faster and more frequent regional connections via Caltrain (due to electrification), and the expansion of Bay Area Bikeshare.

Streets at the Power Station will be designed to enhance walking and bicycling connections to transit, the Blue Greenway, and adjacent neighborhoods in the city. In addition to being better for the environment, sustainable transportation choices support the health and wellness of future residents, workers, and visitors to the site. Figure 1.6.3 illustrates the transportation network for the Power Station.

Streets and sidewalks will be safe and enjoyable for users of all backgrounds, physical abilities, and mode choices. Street design will plan for and accommodate evolving transportation needs and technology, including a shift to shared modes like ride-hailing services and public transit, increased passenger loading, and systems-based delivery of goods. The complete streets framework is based on Principles 4 and 7.

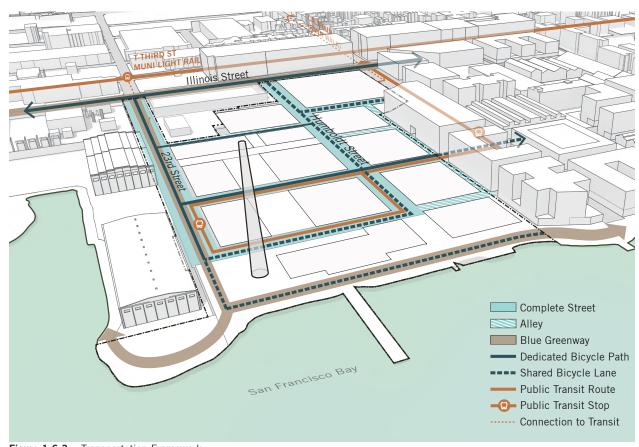


Figure 1.6.3 Transportation Framework

Historic Character

There are a few remnants of the site's prior use as a sugar refinery, and later as a power station, that carry the historic character of the Power Station into the present. The Stack, arguably the most prominent visual icon of the Central Waterfront area, will be retained. Unit 3, the second most visually prominent structure on-site, may be retained and converted into a hotel. Other, historic resources, such as the Compressor House, Meter House, Gate House and the Station A complex, are proposed to be demolished.

Adaptation of this site from a polluting power plant into a healthy, sustainable neighborhood also serves as an important opportunity to shape a sustainable future for the site with thoughtful, forward-thinking, and integrated design.

A robust interpretive program will spotlight and communicate the unique industrial history of the project site and its role in the Dogpatch neighborhood through a permanent display of interpretive materials in open spaces and on buildings. (Refer to Section 2: Interpretive Master Plan.)

Where historic resources such as the Stack (and potentially Unit 3) are adaptively reused, those buildings/locations will incorporate site interpretive elements as a way to share the stories of the site's industrial past.

To ensure that new construction is compatible with the historic district within which the project site is located, Third Street Industrial District design controls are embedded in the open space, streets and building sections of this D4D. The historic character framework is based on Principle 3.



A view of Unit 3 and the Stack from the Bay.



The Pompidou Center in Paris provides an example of how Unit 3 could look if adapted into a hotel.



A historic building adapted into a hotel.



The Standard, on New York's High Line, demonstrates how the identity of a hotel can be tightly linked to adjacent open spaces, as Unit 3 will be with the waterfront at the Power Station.

Sustainability, Resilience, and Wellness
Redevelopment of the Power Station aims to create
a healthy, resilient, and environmentally innovative
development that embraces wellness. The project
also endeavors to enhance public understanding
of sustainability and resiliency and sees the site's
interpretive program as an area to accomplish this goal.

Transportation planning on the site is intended to reduce single-occupancy vehicle use, which improves air quality by reducing greenhouse gas emissions from cars. New infrastructure will take advantage of the mix of uses on site, allowing buildings to work together to save water and energy – critical as buildings account for a large portion of greenhouse gas emissions.

The open space strategy will restore waterfront access and vegetation to the site, improving biodiversity and encouraging healthier ecosystems, using landscape to manage stormwater, further improve local air quality, and provide spaces for active outdoor use. As a result of climate change, the site's future elevations along the shoreline anticipate and accommodate sea level rise and storm surge into the year 2100.

A focus on wellness will be realized through a site design that encourages walking and cycling, and site-wide recreational amenities such as the rooftop soccer field, flexible lawns, and play areas. Inside the buildings, wellness will be realized through the selection of healthy building materials and the provision of building amenities that support activity, respite, and community gathering.



Green roof decks will provide easy access to outdoor green space.





Flexible outdoor spaces allow for a range of activities such as yoga and other forms of fitness.



The rooftop soccer field will provide an important recreational amenity for the entire Central Waterfront.

Urban Form and Architecture

The Central Waterfront is made up of different neighborhoods that together form a distinct, eclectic district. A diverse mix of buildings characterizes the area, including large-scale warehouses that occupy an entire block, small Victorian flats, mid-rise multifamily buildings, and large-floorplate office buildings. Visual connections to most of the site are limited by the presence of the switchyards and the American Industrial Center buildings.

The Power Station design establishes a pattern of streets and blocks that is walkable and appropriate to its context, and that relates and connects to the existing and future neighborhood. The ground floors of buildings will be programmed and designed to enliven and activate the public realm and emphasize a human scale.

Building envelopes have been set to allow sunlight to reach parks and streets, reduce wind impacts, and step down toward the water's edge. The massing for the site will allow for a diversity of building heights and types, including low- and mid-rise buildings. A single tower will rise to match the height of the Stack, creating a counterpoint to this icon and an indication that there is life and activity beyond the switchyards.

As illustrated in Figure 1.6.4, most buildings will make up a general urban fabric, with a streetwall height that provides enough continuity to frame the streets, but allows for a variety of heights and modulation ("Fabric Buildings"). A few select buildings will stand out: the Unit 3 hotel and the Stack, as well as the 300-foot tower and Block 10 ("Standout Buildings"). These

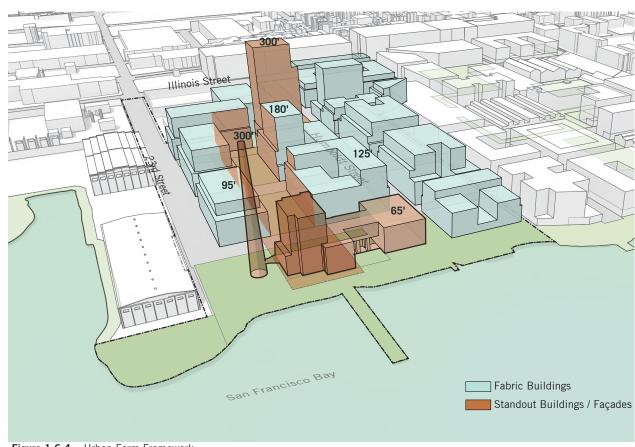


Figure 1.6.4 Urban Form Framework


are all opportunities to deploy iconic architecture that contributes to a unique site identity and sense of arrival at a special place.



Images above capture the aspirations for the architecture at the Power Station: gridded buildings with structure-and-fill-type construction, solid streetwalls, and potential for more transparency above; a ground floor that is designed to enliven and activate the adjacent pedestrian realm; and high-quality materials that contribute a tactile aspect to the pedestrian experience.

TELLING OUR STORY: INTERPRETIVE MASTER PLAN

2.1	Experiential Goals	34
2.2	Visitor Flow & Interpretive Locations	36
2.3	Interpretive Production Techniques	40
2.4	Salvaged Features	42

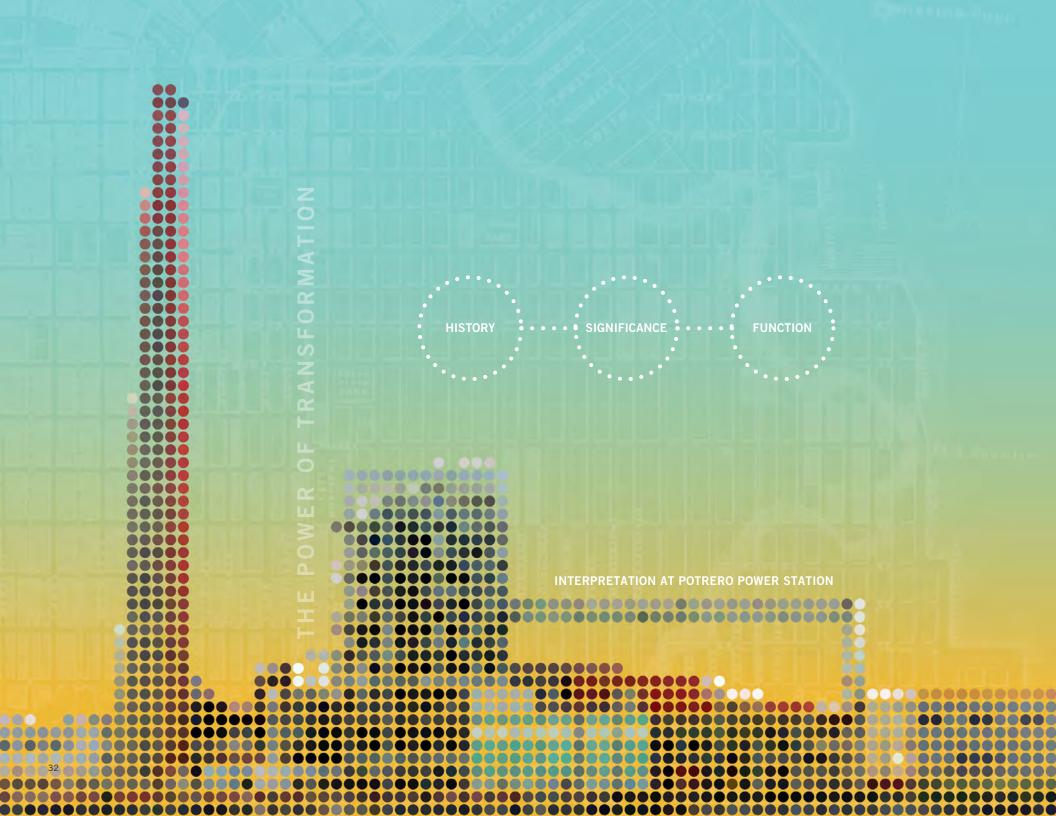

Interpretive Master Plan

The Power Station will celebrate its rich industrial history, bridging its past with contemporary stories of its continued transformation. A program of coordinated interpretive exhibits will be integrated throughout public areas and open spaces to promote an understanding of the site's history, significance, and function.

The Interpretive Mission Statement above shall guide all interpretive endeavors for the Potrero Power Station (the "Power Station").

This Interpretive Master Plan component of the *Potrero Power Station "Design for Development"* (D4D) details important stories relevant to the further development of the site.

It diagrammatically organizes the site's various stories into a framework of interpretive experiences that will be designed to illustrate the site's history, significance

and function to residents, employees, and visitors who live, work and recreate on site. The design and implementation of the interpretive strategies as identified within this document shall be consistent with the D4D and coordinated with the designs and designers of public areas and open spaces. The hierarchy, location and expression of these interpretive experiences will be further refined during the project's implementation phase.

2.1 Experiential Goals

The following tenets are a culmination and distillation of local government agency and project stakeholder guidance, along with interpretive best practices. They shall guide the development of interpretive exhibits at the Power Station. See Figure 2.1.1.

Celebrate Transformation

The site has a rich industrial history, with each successive occupant "standing on the shoulders" of its predecessors. The infrastructure of each occupying industry was repurposed and transformed to accommodate the next. Each occupant was tied to the waterfront, which also continually changed based on the needs of the then occupant. The Power Station will continue in this evolution to support the ever-changing needs of the community. The exhibits should highlight transformation as a "metanarrative."

Demonstrate Connections

The intent is to expose residents, visitors, and employees to the layered history of the site rather than depict the site's history in a linear fashion. Potrero Point has many independent stories, which paint a broader picture when combined. By bridging the past with the present within a geographical context, the exhibits at the Power Station should be designed to help visitors connect these individual stories into broader-reaching themes to fully realize the site's importance.

Create a Unique Identity

The industrial heritage along the Central Waterfront is evident across Potrero Point and many neighboring sites. Once these developments are complete, most visitors will perceive them as a continuous fabric of the city, yet each has a unique story to tell. For continuity, the exhibits at the Power Station should share some interpretive methodologies with neighboring sites, yet visitors shall be made aware of historical boundaries to create a unique identity and sense of place.

Reveal the Past

Continuous growth has yielded many changes to Potrero Point over time. With technological advances, the site infrastructure has evolved to support its inhabitants and will continue to do so. Even during its tenure as a functioning power station, many prominent structures were replaced by more relevant ones. Upon completion of the Power Station development, many of the site's past historic resources will not be physically available for storytelling. Where appropriate and feasible, these elements shall be revived in interpretive features like paving patterns, site markers, exhibit panels, repurposed artifacts and other artistic techniques intended to show what is no longer there. Additionally, any retained historic resources shall be interpreted within the exhibit program.

Echo the Diversity

A diverse array of visitor types will come to the Power Station - those with different interests, time constraints, learning styles, capabilities, ages, cultures, etc. The site will have a heterogeneous mix of offerings and experiences and the exhibit methodologies shall be equally varied to provide interpretation for all of its users and visitors.


Allow for Change

The site has transformed throughout its history and is expected to continue evolving. Permanent interpretive features should have the capacity to be augmented with opportunities for further storytelling, adding points of view and even reinterpreting history if society's views change. The site will include multi-purpose programmable areas, which potentially allow an ongoing dialogue about its history, as well as facilitated interpretive events, such as, changing exhibits or the display of archaeological features that may be uncovered during site excavation.

The Collective Whole

It is unlikely that each interpretive experience could individually satisfy all of these tenets. Interpretive designers should attempt to satisfy as many of these tenets as possible per experience and consider the collective whole for satisfying all of the experiential goals.

Figure 2.1.1 Interpretive Experiential Goals

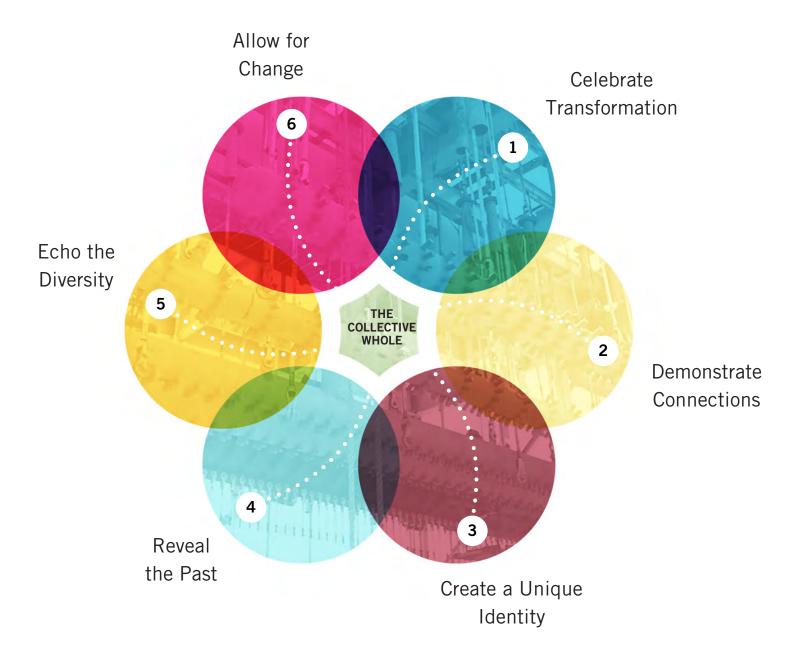

2.2 Visitor Flow and Interpretive Locations

At the Power Station, various visitors will enter the site from different points, and come with unique destinations and interests. Controlling the sequence and depth of each visitor's interpretive experience is not possible. However, learning can be optimized by establishing a hierarchy of experiences designed to direct individuals from one destination to another, within their interests.

Figure 2.2.1 demonstrates potential pedestrian paths of travel through the site. Though typical behavior might be from west to east along primary corridors, an indefinite number of visitor pathways may be assumed. Using an aleatoric approach, a random experience for organic discovery of stories is embraced, while providing structure in the hierarchy of experiences, painting stories in an orderly manner across the site. Thus, interpretive exposure for the largest variety of visitor types is maximized, offering a unique and novel experience for each person.

This method of interpretive organization is referred to as "hub and spoke". A central hub of interpretive information provides an overview of all of the site's stories, as shown on Figure 2.3.1. It feeds (and conversely is fed by) interpretive features across the site. Such features may take the form of larger interpretive features or smaller "breadcrumbs" collected by wanderers.

The hub and spoke approach, along with a hierarchy of interpretive experiences, will also be employed at adjacent sites, including Pier 70 SUD and Crane Cove Park. This continuity allows visitors across multiple sites to place individual site stories into a larger context to better appreciate the significance of the sites, individually and collectively.

CONSIDERATIONS

2.2.1 The Hub

Create a central interpretive hub to educate and inspire travel to alternate points on the site. This hub shall be placed in a prominent, open space area and shall give an interpretive overview of the site, as well as direct visitors to other locations to continue their interpretive journey.

2.2.2 Interpretive Hierarchy

At geographically-appropriate locations, employ a diverse range of interpretive features (consistent with the Interpretive Experiences described later in this document), organized into a hierarchy of experience types with varying depths, fed from (and to) the hub. This will allow learning experiences for all visitor types.

2.2.3 Visitor Paths

In the layout of interpretive experiences on site, embrace random paths of travel, yet provide a visible organization of stories. This will allow each visitor to have a novel experience and still find the information they may be seeking.

2.2.4 Collective Experience

Design individual elements to paint a larger interpretive picture by demonstrating connections to other interpretive elements on site. By providing these connections, visitors will better understand the context of a particular story within the site.

2.2.5 Connect to Adjacent Sites

Connect the Power Station interpretive stories to adjacent sites through shared interpretive methodologies and content references to provide context between the sites.

2.2.6 Site Introduction

At each major point of site entry, consider the use of a site introduction. This will help delineate site boundaries to create a unique site identity. These elements should give a brief overview of the historical significance of the site and may be tied with other site identification and orientation information. At each minor point of entry, consider the use of a smaller site boundary marker to identify historical property lines.


2.2.7 Breadcrumbs

Consider the regular use of light interpretive moments across the site to help lead visitors from one experience to another. Increase the density along the "wiggle" pedestrian zone to help draw visitors to the waterfront.

2.2.8 The View

Though the tops of buildings are not typically considered part of the open space portions of the site, they represent a unique vantage point in which to see the extent of the site and understand what was once there, in addition to affording an opportunity to see the site within the context in which it resides. Designers of site buildings should consider adding interpretive elements atop any buildings where the public may have access (especially the Rooftop Soccer Field and Unit 3).


Figure 2.2.1 Interpretive Visitor Flow Diagram

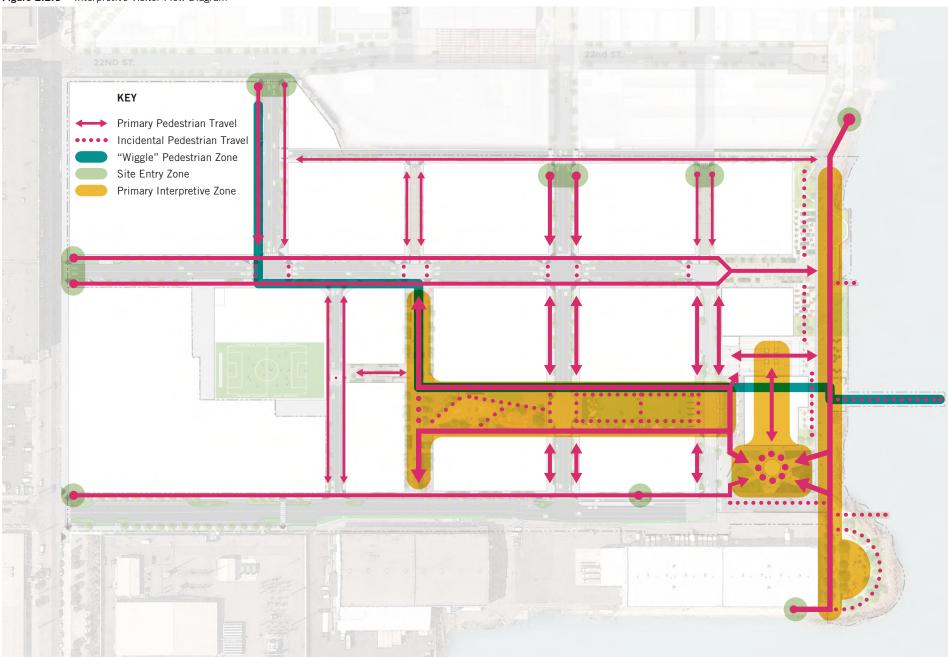

TELLING OUR STORY - INTERPRETIVE MASTER PLAN

[This page intentionally left blank.]

Figure 2.2.2 Interpretive Location Plan Diagram

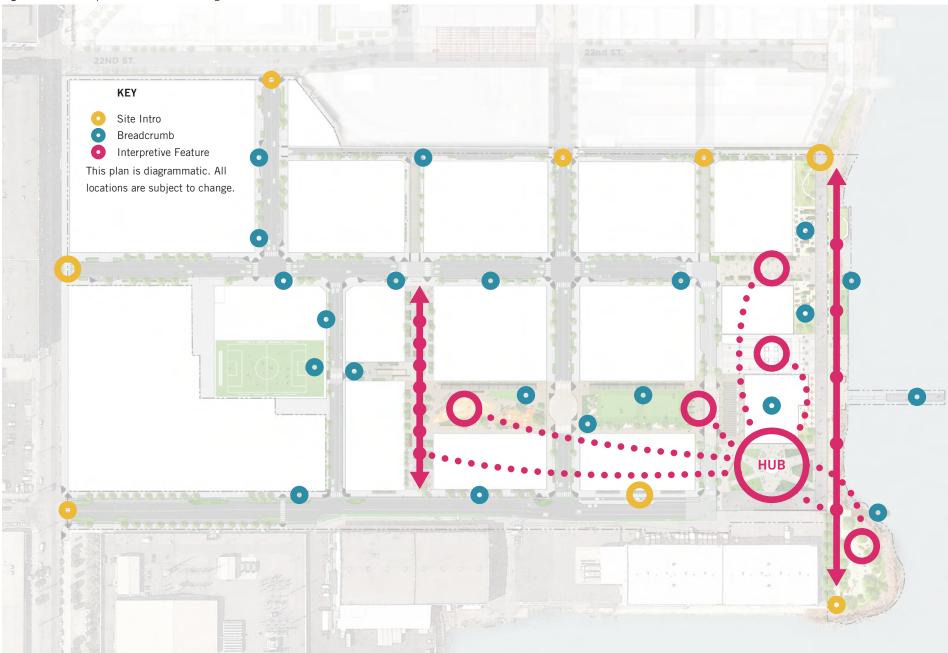

2.3 Interpretive Production Techniques

GUIDELINES

2.3.1 Interpretive Production Techniques

The Power Station will have a rich tapestry of interventions across the site. A primary implementation goal should be to use constructed or existing site elements wherever possible as interpretive infrastructure. This will not only produce a more integrated look, but can also reduce cost and structural interventions in a busy landscape. While Interpretive Experiences may employ a variety of methods to tell a story, this family of techniques should be used wherever possible. See Figure 2.4.1 for precedent imagery of these techniques.

- a. Etched Concrete Text and/or diagrammatic (or halftone) images are etched into a horizontal or vertical cast concrete surface via a graphic film that is temporarily applied to the form in the casting production. When removed, this visually exposes the aggregate within the surrounding smooth finished surface wherever the graphic exists.
- b. Sandblasted Surface Text and/or diagrammatic images are sandblasted into hard surfaces (concrete, paving, boulders) via a frit masking process. This produces depth wherever the graphic occurs and may be used across a field of material or individually. This process is best-suited for irregular or already-set surfaces and may be dyed to produce additional contrast.
- c. Laser Etched Wood Text and/or diagrammatic images are laser etched into wood decking, benches and other site wood surfaces (prior to delivery to the

- site), removing a small amount of material wherever the graphic occurs. The graphic contrast is enhanced by a slight burning of the wood. This may be used across a field of wood or individually.
- d. Modified Metal Text and/or diagrammatic images are incorporated into metal surfaces via a variety of techniques, including chemical etching, rust resistant finishes and screenprinting. Additionally, laser (or waterjet) cutting may be employed to shape and/or remove material.
- e. Tactile Object A cast bronze dimensional representation of an historical object (or site plan) is attached to a wayside (or other didactic) panel or set on its own to provide tactile interpretation. This durable surface may have a patina (or paint) applied to match other site materials. The technique is especially relevant for those with visual disabilities.
- f. Wayside A didactic graphic panel is mounted to an architectural surface or is freestanding to give interpretation specific to that area or adjacent building/object. This is the primary tool utilized to provide interpretive depth, where necessary. It may also be paired with other interpretive production techniques and wayfinding information.

Figure 2.3.1 Interpretive Production Techniques



POTRERO POWER STATION Design for Development – DRAFT: October 3, 2018

2.4 Salvaged Features

STANDARDS

2.4.1 Use of Salvaged Elements

Prior to any demolition or rehabilitation activities that would remove character-defining features of an individual historical resource or contributor to a historic district on the project site, the project sponsor shall consult with planning department preservation staff as to whether any such features may be salvaged, in whole or in part, during demolition/alteration. The project sponsor shall make a good faith effort to salvage materials of historical interest to be utilized as part of the interpretative program. This could include reuse of the Gate House or a portion of the Unit 3 Power Block.

Following any demolition or rehabilitation activities within the project site, the project sponsor shall provide within publicly accessible areas of the project site a permanent display(s) of interpretive materials concerning the history and architectural features of the individual historical resources and Third Street Industrial District. The content of the interpretive display(s) shall be coordinated and consistent with the site-wide interpretive plan prepared in coordination with planning department preservation staff, and may include the display of salvaged features recovered through the process described above.

The specific location, media, and other characteristics of such interpretive display(s) shall be presented to planning department preservation staff for review prior to any demolition or removal activities. The historic interpretation plan shall be prepared in coordination with an architectural historian or historian who meets

the Secretary of the Interior's Professional Qualification Standards and an exhibit designer or landscape architect with historical interpretation design experience.

Interpretive display(s) shall document both the Third Street Industrial District and individually eligible resources to be demolished or rehabilitated. The interpretative program should also coordinate with other interpretative displays currently proposed along the Bay, specifically at Pier 70, those along the Blue Greenway, and others in the general vicinity. The interpretative plan should also explore contributing to digital platforms that are publicly accessible.

A proposal describing the general parameters of the interpretive program shall be approved by planning department preservation staff prior to issuance of a site permit. The substance, media and other elements of such interpretive display shall be approved by planning department preservation staff prior to issuance of a Temporary Certificate of Occupancy.

Section 3 LAND USE

	Land Use Plan	46
2	Ground Floor Uses	50



Zoning and Land Use

The Power Station will provide a mix of the uses that support the Central Waterfront neighborhood identity as a place to live, work, and create.

The district will include Residential, Office, Hotel, Life Science, Laboratory, PDR, Retail, and Entertainment, Arts, and Recreation uses. Off-street accessory parking is permitted, and off-street non-accessory parking is not permitted. Supplementing the permitted uses are standards designed to create active ground floor uses, including PDR spaces that will enliven frontages along 23rd Street, and community-oriented spaces or residences throughout the neighborhood. The district permits rooftop accessory and principal uses including Retail, Child Care Facilities, and Entertainment, Arts, and Recreation uses.

The zoning and land use controls that follow will be codified in the San Francisco Planning Code, Section 249.XX, as the Power Station Special Use District (the "SUD"). The land uses for each block are intended to create a vibrant, complete neighborhood.

As shown in the Land Use Plan (Figure 3.1.1), particular blocks permit a variety of uses including: (1) Residential, (2) Office, or (3) Life Science/Laboratory uses. Ground-floor PDR use is required on certain blocks, while others along the site's perimeter are permitted to be "flexible" or mixed-use, as denoted with striped coding on the Land Use Plan.

Uses shown in the Land Use Plan apply to all floors, including mezzanines and ground floors, unless otherwise noted. The standards focus on overall categories of use and denote specific uses within each category that are not permitted.

3.1 Land Use Plan

STANDARDS

3.1.1 Land Use

The Potrero Power Station Project is zoned PPS-MU. All uses shall be permitted, except as listed in Table 3.1.2 as Not Permitted (NP). The uses shown below are principal uses.

Land use categories identified in Table 3.1.2 are consistent with Planning Code definitions except for Accessory Parking, which is defined in the Glossary.

Ground floor uses shall be further regulated by Section 3.2: Ground Floor Uses.

3.1.2 Dwelling Unit Density Limit

Dwelling unit density shall not be limited by lot area. See Section 6.2.3 and 6.2.4 for dwelling unit exposure standards and residential open space requirements.

3.1.3 Required Minimum Dwelling Unit Mix

- (a) No less than 25 percent of the total number of proposed dwelling units in each building (except buildings in which 100 percent of dwelling units are affordable) shall contain at least two bedrooms. Any fraction resulting from this calculation shall be rounded to the nearest whole number of dwelling units.
- (b) No less than 10 percent of the total number of proposed dwelling units in each building (except buildings in which 100 percent of dwelling units are affordable) shall contain at least three bedrooms. Any

fraction resulting from this calculation shall be rounded to the nearest whole number of dwelling units. Units counted towards this requirement may also count towards the requirement for units with two or more bedrooms as described in subsection (a) above.

(c) The minimum dwelling unit mix requirement shall not apply to buildings for which 100 percent of the residential uses are: Group Housing, Dwelling Units that are provided at below market rates, Single Room Occupancy (SRO) Units, Student Housing, or housing specifically and permanently designated for seniors or persons with physical disabilities, including units to be occupied by staff serving any of the foregoing residential uses.

3.1.4 Active Uses in Open Spaces

Retail, Sales and Service, and Entertainment, Arts, and Recreation Uses are allowed within a limited number of mobile carts and kiosks in parks and open spaces, as shown in Table 3.1.1 and discussed in Section 4.15. See Figure 4.15.1 for potential locations where mobile carts and semi-permanent kiosks are permitted.

3.1.5 Temporary Uses

Temporary Uses and Intermittent Activities (as listed in Planning Code Sections 205.1 through 205.4) are permitted, including within parks and open spaces, provided that the temporary uses listed in Section 205.3 are instead limited to 72 hours per event, twice a month,

for up to 12 events per year per premises, except as otherwise permitted within for the waterfront access corridor (Turbine Plaza) on Block 9.

3.1.6 Interim Uses

Certain interim uses, including Public and Private Parking Lot, PDR, Retail, and Entertainment, Arts, and Recreation uses are permitted prior to completion of the project and in accordance with the SUD (Appendix F). Tree nurseries are also permitted prior to the construction of new buildings in the district.

3.1.7 Outdoor Activity Areas

Outdoor Activity Areas are permitted.

 Table 3.1.1
 Publicly Oriented Accessory Retail Uses in Open Spaces

USE/ LOCATION	LOUISIANA PASEO	POWER STATION PARK	HUMBOLDT STREET PLAZA	TURBINE PLAZA	STACK PLAZA	WATERFRONT PARK
Mobile Cart	Limit of 1 in this open space	Limit of 2 in this open space	Limit of 1 in this open space	Not permitted	Not permitted	Limit of 3 in this open space
Semi-Permanent Kiosk (not larger than 200 gross square feet in size)	open space	Limit of 1 in this open space	Limit of 1 in this open space	Not permitted	Not permitted	Limit of 1 in this open space

Table 3.1.2* Permitted Uses

Potrero Power Station SUD Blocks (As Shown in Figure 3.1.1)	Residential Uses	Institutional Uses	Retail Uses	Non-Retail Sales and Service (including Office Uses)	Entertainment, Arts, and Recreation Uses	PDR Uses	Laboratory Uses	Life Science Uses	Utility and Infrastructure	Accessory Parking	District Parking Garage
1	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	NP	NP	NP	Р	P(11)
2	NP	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	Р	Р	NP	Р	NP
3	NP	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	Р	Р	NP	Р	NP
4	Р	P(1)	P(2)(3)(9)	Р	P(4)(12)	NP	Р	Р	NP	Р	NP
5	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	P(6)	NP	NP	Р	Р	P(11)
6	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	NP	NP	NP	Р	NP
7	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	NP	NP	NP	Р	NP
8	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	NP	NP	NP	NP	Р	NP
9	P(8)	P(1)	P(2)(8)(9)	P(10)	P(4)(12)	NP	NP	NP	NP	Р	NP
10	NP	P(1)	P(2)(3)(9)	Р	P(4)(12)	P(5)(6)(7)	Р	Р	NP	Р	NP
11	NP	P(1)	P(2)(3)(9)	Р	P(4)(12)	P(5)(6)(7)	Р	Р	NP	Р	NP
12	Р	P(1)	P(2)(3)(9)	Р	P(4)(12)	P(5)(6)(7)	Р	Р	NP	Р	NP
13	Р	P(1)	P(2)(3)(9)	P(10)	P(4)(12)	P(5)(6)(7)	NP	NP	Р	Р	P(11)
14	Р	P(1)	P(2)(3)(9)	Р	P(4)(12)	NP	NP	NP	NP	Р	NP
The Stack	NP	NP	Р	NP	P(4)	NP	NP	NP	NP	NP	NP

Notes:

- * Nonconforming uses and structures may be continued and are otherwise subject to Sections 181-183 and 188 of the Planning Code. A "nonconforming use" or "nonconforming structure" is a use or structure that existed lawfully at the effective date of the Power Station SUD, or of amendments thereto, and fails to conform to one or more of the use limitations listed in Table 3.1.2, or controls included in Section 6 of this D4D.
- (1) Hospital is NP. If building is predominantly non-residential, a Child Care Facility may be located on the rooftop; in any other event. Institutional Uses are NP on rooftops.
- (2) Vehicle Storage Lot is NP.
- (3) Hotel is NP.
- (4) Livery Stables are NP. Nighttime Entertainment uses are permitted on Blocks 9 and 12 only.

- (5) Automobile Assembly, Agricultural and Beverage Processing 1, Light Manufacturing, Metal Working are P. Other Industrial Uses are NP.
- (6) P at the basement level, ground floor, 2nd floor, and mezzanine only.
- (7) Public Utility Yard and Storage Yards are NP.
- (8) If Block 9 contains predominantly Hotel Uses, Residential Uses would be P for a maximum of 25 percent of the gross square footage of the buildings on Block 9. In such event, the remaining 75 percent of the gross square footage of the buildings on Block 9 shall be Hotel.
- (9) If building is predominantly non-residential, P at the basement level, ground floor, mezzanine, 2nd floor, and on rooftops only. If building is predominantly residential, P at the basement level, ground floor, mezzanine, and 2nd floor only. Only Bar, Tourist Oriented Gift Store, Specialty Grocery,

- Gym, Liquor Store, Limited Restaurant, General Restaurant, Instructional Service, and Retail Personal Service Uses P on rooftops; other Retail Uses are NP on rooftops.
- (10) P at the basement level, ground floor, and mezzanine only, subject to Active Use and Active Lane frontage requirements.
- (11) A total of one District Parking Garage is P within the SUD, to be provided either on Block 1, 5, or 13.
- (12) If building is predominantly non-residential, P at the basement level, ground floor, mezzanine, 2nd floor, and on rooftops only. If building is predominantly residential, P at the basement level, ground floor, mezzanine, and 2nd floor only. Only Arts Activities, General Entertainment, Nighttime Entertainment, Open Recreation Area, Outdoor Entertainment, and Passive Outdoor Recreation Uses P on rooftops; other Entertainment, Arts, and Recreation Uses are NP on rooftops.

Figure 3.1.1 Land Use Plan



3.2 Ground Floor Uses

Engaging and accessible uses are encouraged on the ground floors of buildings. To encourage movement through the site from the existing Dogpatch neighborhood to Waterfront Park, a vibrant retail core will exist along Humboldt Street. Beginning with a General Grocery use near the entrance of the site, residents, employees, and guests alike will continue along the street to both neighborhood-serving retail as well as experiences more boutique in nature as one approaches the water's edge.

STANDARDS

3.2.1 Measuring Frontages

A frontage shall be defined as the linear extent of a vertical exterior face or wall of a building that is adjacent to or fronts a right-of-way or open space and shall exclude space allowed for parking and loading access, building egress, building operations (such as trash rooms), and access to mechanical systems. Frontages shall be measured in linear feet.

3.2.2 Measuring Corners

Corners shall be defined as the first 30 feet extending from the intersection of two right-of-ways or a right-of-way and an open space along the frontage of a building.

3.2.3 Priority Retail Frontages

As listed below in Standard 3.2.4, a minimum of 50 percent of the shaded Priority Retail Frontage zones shown in Figure 3.2.1 shall be limited to Retail, Sales and Service uses. Retail uses must be provided within the first 40 feet minimum of building depth on the ground floor.

3.2.4 Active Use Frontages

To create pedestrian and visual activity at the ground floors of buildings, Active Uses shall occur on frontages within the site as shown in Figure 3.2.1. Ground floor Residential and Office uses meeting certain requirements described below, qualify as a permitted Active Use. With the exception of space for parking and loading access, building egress, and access to mechanical systems, space for the following "Active Uses" must be provided within the first 25 feet minimum of building depth on the ground floor for 100 percent of the shaded Active Use frontage zone identified in Figure 3.2.1:

Retail, Sales and Service Use*

- PDR Use
- Institutional Use
- Entertainment, Arts, and Recreation Use
- Lobbies up to 40 feet or 25 percent of building frontage, whichever is larger.
- Dwelling Units with direct access to public sidewalk

The following uses, provided that they do not collectively occupy more than 50 percent of the building's required Active Use Frontage zone:

- Non-Retail, Sales and Service Use (including Office Use); Social spaces, such as kitchens, conferences rooms, and waiting areas of Non-Retail Sales and Service Use shall be provided at the front of spaces, oriented toward the street.
- Accessory uses that are social in nature, such as fitness rooms, work spaces, which provide areas with desks for tenants to work either quietly or collaboratively, workshops, for hands-on projects and to conduct repairs, leasing offices, shared kitchens, resident libraries or reading rooms, community rooms;
- Accessory mail rooms and bicycle storage rooms;

All of the above uses must have a Transparent Frontage.

Dwelling Units that provide direct, individual pedestrian access to a public sidewalk are considered Active Uses.

* 1,000 square foot or smaller "Micro-Retail" uses can have a depth of 10 feet from the street (as opposed to the standard depth of 25 feet). See Section 6.16 for additional guidelines regarding the development of Active Use space.

Figure 3.2.1 Ground Floor Uses



3.2.5 PDR Frontages

For Ground Floor of Blocks 10 and 11 facing 23rd Street Sugar Warehouses and Block 13 facing American Industrial Center Southern Extension a minimum of 75 percent of the shaded Priority PDR Frontage zone shown in Figure 3.2.1 shall be limited to PDR use, with the exception of space for parking and loading access, building egress, and access to mechanical systems.

Uses required in this frontage zone shall be provided within the first 40 feet minimum from any facades.

3.2.6 Active Lane Frontages

Active Lane frontages shall contain Active Lane Uses for at least 20 percent of the subject building frontage. Minimum depth requirements do not apply to this frontage zone. Active Lane Uses include all those listed in Standard 3.2.4, Active Use Frontages, as well as the following:

- Building inset for pedestrian amenities, including permanent, semi-permanent, and movable furnishings such as tables, chairs, umbrellas;
- Pop-up and Micro Retail, Entertainment, Arts and Recreation Uses; and
- Public Art, such as a wall mural.

3.2.7 Accessory Uses

All ground-floor uses, except PDR, are permitted to provide accessory uses, including office use, in up to 50 percent of their gross square footage provided that Active Use Frontage requirements per Section 3.2.4 are met.

Ground-floor PDR uses are permitted to provide accessory office and retail uses in up to 40 percent of their gross square footage.

3.2.8 Transformer Vaults

For any building with a frontage greater than 75 feet in length, transformers shall be located within a vault within the ground floor building frontage with direct access to the sidewalk.

3.2.9 Active Corners

Street corners are an important node of urban life, naturally resulting from crossroads, and providing an opportunity for people to gather, pause, and select a new path. Specific corners are highlighted in Figure 3.2.1 as requiring a higher level of publicness and activity to create opportunities for public interaction with buildings and wayfinding between different nodes within the site and beyond. Locations indicated as active corners are required to provide, for a minimum of 30 feet of the frontage from each corner, either a Retail, Sales, and

Service use; Entertainment, Arts, and Recreation use; or Community Facility use. See Section 6.10 for more detailed discussion of active corner guidelines.

Section 4 OPEN SPACE

4.1	Open Space Network	56	4.16	Waterfront Park	92	4.28	Power Station Park East
4.2	Open Space Systems	58	4.17	Waterfront Park—Circulation	94	4.29	Power Station Park West
4.3	Resilience and Adaptation	60	4.18	Shoreline Open Space Elements—		4.30	Louisiana Paseo
4.4	Open Space Pedestrian Circulation	62		Program and Design	96	4.31	Rooftop Soccer Field
4.5	Urban Forest	64	4.19	Waterfront Outdoor Food Service Areas	98	4.32	Block 9 Building and Open Space
4.6	Planting, Ecology, and Habitat	68	4.20	The Point	100		Configuration Without Unit 3
4.7	Stormwater Management	70	4.21	Stack Plaza	104		
4.8	Site Irrigation	74	4.22	Turbine Plaza	108		
4.9	Site Furnishings	76	4.23	Unit 3 Entry Plaza, Passenger Loading, and			
4.10	Bicycle Parking - Open Space	80		Emergency Vehicle Access	112		
4.11	Paving and Materials	82	4.24	Humboldt Street Plaza	114		
4.12	Ground Level On-Structure Open Space Design	84	4.25	Power Station Park and Louisiana Paseo— Overview	118		
4.13	Wellness	86	4.26	Power Station Park and Louisiana Paseo— Overview—Pedestrian Circulation	120		
4.14	Public Art	88	4.27	Power Station Park and Louisiana Paseo—			
4.15	Mobile Carts and Semi-Permanent Kiosks in Open Space	90		Overview—Program	121		



Open Space

The Power Station's open spaces will feature vibrant community parks and plazas, opportunities for active recreation, and iconic waterfront destinations. A vital stretch of San Francisco's historic waterfront, closed to the public for over 100 years, will be reinvigorated and opened up for all to enjoy.

A new destination waterfront park, along with inviting, neighborhood-focused spaces, will provide diverse public amenities and recreational opportunities for workers, residents, and visitors. These new open spaces will complement and enrich the network of existing and planned open space in Dogpatch and the Central Waterfront.

The Waterfront Park at the Power Station will be a destination that includes diverse programming to encourage a variety of experiences along the waterfront, emphasizing views to the Bay. Park designs will feature the 300-foot-tall Stack, an iconic structure that underscores the site's industrial past as a power plant. The design of a new civic space at Stack Plaza will enhance its status as a prominent landmark and encourage visitors to linger. Natural areas of Bay shore adapted plants will alternate with urban social spaces

at a variety of scales. Preserved elements of the site's industrial heritage will be showcased, connecting people to the Bay and contributing to the future health of its human and ecological communities.

A set of public urban open spaces at Power Station Park and Louisiana Paseo will provide recreational and fitness activities, informal play, opportunities for casual social interaction, and space for outdoor gatherings and performances. A publicly accessible rooftop soccer field at Block 5 will provide additional space for organized sports. Refer to Figure 4.1.1 for the location of open spaces at the Power Station.

This section prescribes key features, values, and relationships that will define the qualities and functions of each open space that are essential to creating a unique, and vibrant urban open space network.

4.1 Open Space Network

The open space network is a fundamental part of the urban design and identity of the Power Station. A series of open spaces, located along the waterfront and at the center of the neighborhood provide a well-rounded variety of social and recreational opportunities. In total, open space comprises approximately 22 percent of the total project area—6.2 out of 29 acres.

The open space network is made up of nine open space areas, as shown in Figure 4.1.1. While this document refers to all open space areas between Delaware Street and the Bay collectively as the greater Waterfront Park open space zone, this zone is further divided into four distinct open space areas: The Point; Stack Plaza; Turbine Plaza; and Waterfront Park. Waterfront Park includes the Blue Greenway and all of the spaces between the Blue Greenway and the Bay shore, exclusive of the Point, as well as all of the ancillary spaces west of the Blue Greenway and bounded by Delaware Street that are not designated as part of any other open space area.

The greater Waterfront Park zone, at approximately 3.6 acres, will feature an urban edge, with shopping, dining, and public seating areas facing onto the Blue Greenway multi-use trail. The Blue Greenway will be punctuated by a series of overlooks, plazas, and native

planting zones. Together, the waterfront open spaces will form a cohesive whole that acknowledges the site's industrial past while looking to a future for the Bay that prioritizes responsible planning and ecological wellbeing

The project's stretch of the Blue Greenway will link seamlessly with the portion planned for Pier 70 to the north and to the greater Blue Greenway system. The series of integrated waterfront open spaces associated with Blue Greenway will include: Humboldt Street Plaza, Turbine Plaza, Bay Overlooks, Stack Plaza, and the Point. A potential recreational dock would provide water access and contribute to the BCDC Water Trail network.

At the heart of the neighborhood, Power Station Park will include opportunities for fitness, active and passive recreation, and casual social interactions. The two blocks of Power Station Park, at about 1.2 acres, will have distinct programs and elements, but will also be linked by common features and materials. Louisiana Paseo (0.7 acres) will provide flexible use urban plaza spaces and car-free pedestrian areas connecting the neighborhood's retail and residential uses with the open space program.

A rooftop soccer field at Block 5, at 0.7 acres, will provide a publicly accessible Under-10 sized soccer field.

All of these open spaces will be carefully integrated with adjacent ground-floor uses of the blocks and buildings to create delightful, welcoming, active, and unique places.

Open space at the Power Station will conform to BCDC and Public Trust requirements where applicable. All open spaces will provide active, distinctive programming to attract visitors and create a lively network of well-loved public spaces along San Francisco's waterfront.

Figure 4.1.1 Location Map of Open Spaces



- 1) Waterfront Park: Section 4.16-4.19
- 2 Humboldt Street Plaza: Section 4.24
- 3 Turbine Plaza: Section 4.22
- 4 Stack Plaza: Section 4.21
- (5) The Point: Section 4.20
- 6 Power Station Park East: Section 4.28
- 7 Power Station Park West: Section 4.29
- 8 Louisiana Paseo: Section 4.30
- 9 Rooftop U-10 Soccer Field: Section 4.31

4.2 Open Space Systems

While the Power Station's open spaces will each have their own distinct character and unique elements, a common set of systems and principles will be standard across the open space network, constituting a unified set of aesthetic, functional, and structural elements. Standards and guidelines specific to each open space will be described in the relevant sections (4.16 through 4.32). Sections 4.3 through 4.15 provide general standards and guidelines that apply to all open spaces.



4.3 Resilience and Adaptation


Waterfront Park at the Power Station will balance the goal of maximizing public access to the Bay with the reality of "living with the Bay" in the face of future sea level rise. Figure 4.3.2 depicts the portions of the waterfront that will be adapted for Sea Level Rise, and those that will be designed to accommodate coastal flooding events. In the adaptation plan approximately 5 percent, or 0.3 acres (14,000 sf), of open space area will be lost under a model that assumes 66 inches of sea level rise, which is projected to occur in 2100.

Finished grade elevations in the park will be determined based on sea level rise projections for the year 2100 to ensure that accessible paths of travel and all major program areas will remain free of coastal flooding except in extreme storm events.

STANDARDS

4.3.1 Grading Design Criteria

Waterfront Park shall be graded to maximize public access to the waterfront with sea level rise. The Blue Greenway design elevation shall be above the current FEMA base flood elevation (BFE) plus 66 inches. Where existing structures require accommodation at a lower elevation, such as the Stack, ADA-compliant access shall be provided.



FEMA 100 YR BFE 12.0 FFMA 100 YR RFF + 66" SLR MSL = 1.0 RCDC HIRISDICTION ARMY CORPS JURISDICTION FEMA 100 YR BFE with 36" SLR - PROPERTY LINE FEMA 100 YR BFE MEAN SEA LEVEL

Figure 4.3.2 Projected Sea Level Rise of 36 Inches and 66 Inches with Proposed Grading and Seawall


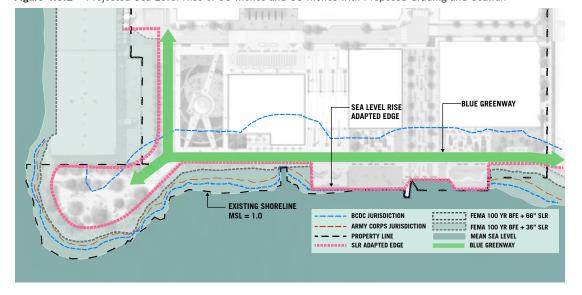


Figure 4.3.3 Typical Existing and Proposed Shorelines at Riprap and Seawall



4.4 Open Space Pedestrian Circulation

The open spaces at the Power Station play an integral role in the neighborhood's overall pedestrian network, connecting streets to parks and bringing people to the waterfront. The open spaces will give residents and visitors intuitive, generous, and clear routes through a diverse set of parks and plazas. Standards and guidelines regarding pedestrian circulation are located within the controls for the Power Station's specific open spaces. Please see Sections 4.17.1, 4.17.6, 4.20.1, 4.21.3, 4.22.2, 4.24.5, 4.26.1, 4.26.2, and 4.28.3.

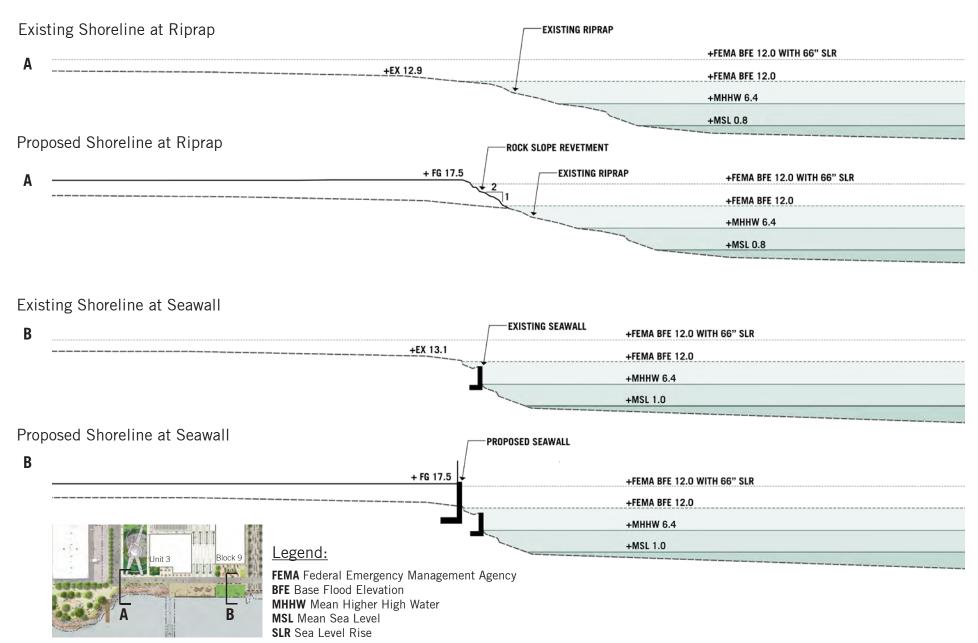

Ample pedestrian walkways with furnishings and amenities



Plaza edge with generous seating and wide paths of travel.






Park edge path open to, and opening up, central field.



Waterfront promenade. OR Waterfront promenade with generous proportions, featuring rain garden and multiple seating types.

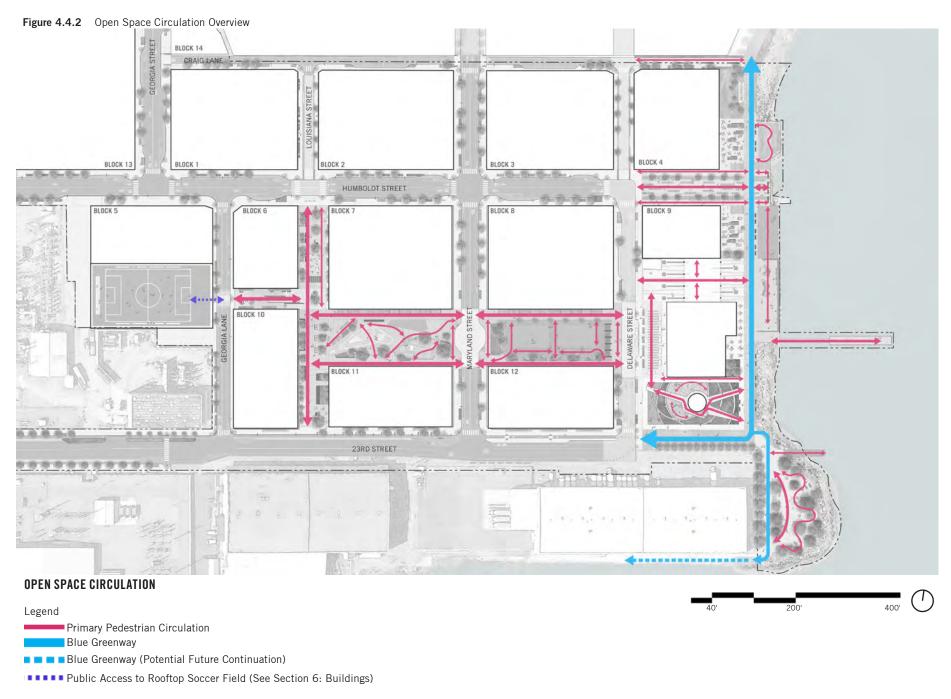

4.5 Urban Forest

Trees within the Power Station's open spaces will function ecologically to help achieve the project's goals for a sustainable and healthy environment. The composition and distribution of a diverse, adaptive urban forest will create a resilient ecological framework to shape varied sensory experiences across the site and provide waterfront and urban habitat.

Trees will provide shade, reduce the urban heat-island effect, and provide shelter for birds and other wildlife.

As trees are some of the most functional and iconic elements in the landscape, careful selection is important in creating a successful urban forest.

The following standards and guidelines apply only to areas outside of the public right of way within privately owned publicly accessible open spaces. Standards and guidelines for street trees can be found in Sections 5.11 and 5.12.

STANDARDS

4.5.1 Urban Forest Composition

Selected species shall generally conform to the baseline for species diversity and distribution shown in Figure 4.5.1. Species selection must also comply with SFDPW requirements (and Port requirements, in Port-owned areas).

Tree Installation and Establishment

- a) Minimum Installation Size: Trees shall be installed at a minimum box size of 24 inches.
- b) Soil Composition: Tree planting soil for backfill within tree pits shall be sandy loam soil and amended as

required to provide a healthy and fertile root zone.

- c) Tree Staking: Manufactured wood or steel staking systems shall be used to stake trees as required during the establishment period if prevailing wind conditions threaten stability of new planting.
- d) Clear Trunk Requirements: Requirements for Clear trunk, the measurement between ground level and first branching, shall be achieved within five years of installation. Branches shall not interfere with Pedestrian Throughway as defined in Section 5.2 of this D4D (minimum 84-inch clearance measured from ground surface). At designated fire access clear zones maintain mandated minimum fire truck vertical clearance of 13 feet and six inches (measured from roadway surface).
- e) Establishment Period: Centrally controlled automatic drip irrigation shall be provided to each tree for establishment irrigation for a minimum of three years. Following that period tree irrigation may be reduced or eliminated. Minimize potable water use for irrigation (see Section 4.8.1).

GUIDELINES

4.5.3 Tree Species Selection



Tree species shall be selected and located based on a combination of their aesthetics and their ecological performance benefits related to improved air quality, stormwater retention, biodiversity and habitat creation. carbon sequestration, and benefits related to public health and comfort.

Tree species for each open space shall be selected in consultation with a certified arborist. Species shall conform to the aesthetic and performance requirements given in Figure 4.5.2 and to the irrigation requirements described in Section 4.8. Power Station tree species shall be selected using the following base-line criteria:

- Trees will thrive receiving the natural regional precipitation and require minimal supplemental irrigation
- Species are non-invasive. (See California Invasive Plant Council listings, www.cal-ipc.org).
- Species show proven long-term durability (20- to 30year life span) in the region.
- Species are tolerant of urban conditions such as compacted soils and air pollution. Consult SFDPW Bureau of Urban Forestry (BUF) tree listings for open spaces.
- Species are not susceptible to disease and blight in this region.
- In exposed open space areas, choose species with a medium to high density branching structure that will provide shade.
- Consider predicted future temperature increases related to climate change when selecting tree species.
- Species do not drop fruit or seed pods.
- Trees in open space areas exposed to significant wind conditions shall be wind-tolerant species. Windtolerant species are those that can survive and thrive in windy conditions without significant root and branch damage or deformation.

4.5.4 Soil Volume

Trees in the public realm should have adequate soil volume and water infiltration to allow for healthy tree growth.

4.5.5 Tree Maintenance

a) Pruning

Trees in the public realm should be pruned yearly to sustain long-term health and to maintain desired growth pattern.

b) Water Application

Determine appropriate water application after establishment (minimum of three years) in consultation with a certified arborist's comprehensive review of tree health on the site. Monitor water application and minimize potable water use for irrigation per Section 4.8.1.

CONSIDERATIONS


4.5.6 Soil Volume

Where feasible, continuous soil volumes connecting multiple tree wells below paving is recommended. Structural soil systems or structural cell systems are recommended for this application if permitted by SFDPW and SFPUC.

4.5.7 Tree Species Selection

Trees that provide habitat opportunities for birds and other small wildlife are encouraged.

Figure 4.5.1 Urban Forest Diversity Planting Zones in Open Space

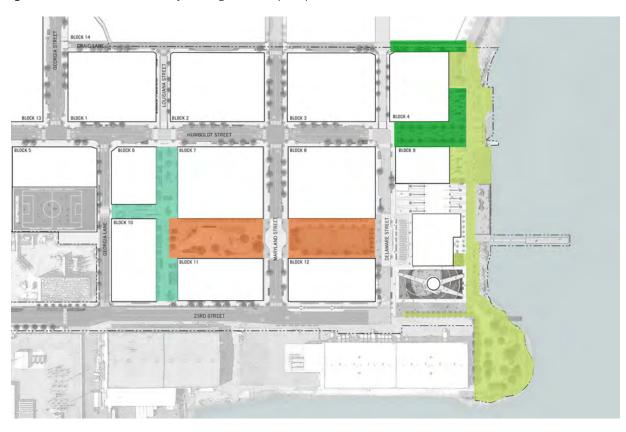

URBAN FOREST DIVERSITY


Planting Zones



Tree criteria for each zone are given in Figure 4.5.2.

Urban Forest

Figure 4.5.2 Tree Aesthetic and Performance Criteria by Planting Zone

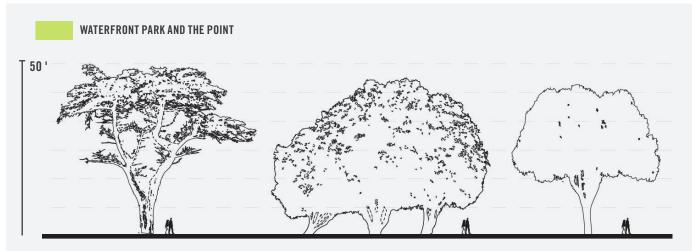

- Large-canopy evergreen tree (to 50-foot+ tall at maturity)
- Minimum 24-inch-box at installation
- Iconic character; picturesque, sculptural form
- Windbreak and specimen tree
- Tolerances: high wind tolerance; tolerant of coastal environment; healthy in paving and/or lawn (select as appropriate for design concept); tolerant of high pedestrian traffic
- Low water usage
- Minimal root disruption when planted in paving
- Recommended species:

Monterey Cypress [Cupressus macrocarpa];


New Zealand Christmas Tree [Metrosideros excelsa];

Red-Flowering Gum [Corymbia ficifolia]; Lemon Eucalyptus [Corymbia citriodora];


Brisbane Box [Lophostemon confertus]; Coast Live Oak [Quercus agrifolia];

Cork Oak [Quercus suber]


*All tree heights given in this figure indicate expected sizes at maturity.



- Medium to large evergreen or deciduous tree (40-foot tall at maturity)
- Minimum 24-inch-box at installation
- Upright, narrow form
- Tolerances: high wind tolerance; tolerant of partto full-shade conditions; healthy in paving
- Low water usage
- Minimal root disruption when planted in paving
- Recommended species: Brisbane Box [Lophostemon confertus]; African Fern Pine [Afrocarpus gracilior]; Chinese Flame [Koelreuteria bipinnata]; Catalina Ironwood [Lyonothamnus floribundus]; Holly Oak [Quercus ilex]; Cork Oak [Quercus suber]; Soap Bark [Quillaja saponaria]



- Primary size: Small to medium evergreen or deciduous tree (25 to 40 feet tall at maturity)
- Secondary Size: Large specimen tree with picturesque form used to punctuate and identify key spaces and provide landmark feature (40 feet or taller at maturity)
- Minimum 24-inch-box at installation
- Use upright or narrow form trees when planting close to buildings
- Use deciduous species where winter sun exposure is desirable
- Tolerances: medium to high wind tolerance; tolerant of part shade to deep shade; tolerant of coastal environment; healthy in paving
- Low water usage
- Recommended species: Melaleuca [Melaleuca quinquenervia]; African Fern Pine [Afrocarpus gracilior]; Chinese Flame [Koelreuteria bipinnata]; Catalina Ironwood [Lyonothamnus floribundus]; Holly Oak [Quercus ilex]; Cork Oak [Quercus suber]; Soap Bark [Quillaja saponaria]; Coast Live Oak [Quercus agrifolia]; Water Gum [Tristaniopsis laurina]; Olive [Olea europaea]; Strawberry Tree [Arbutus x Marina]; Peppermint Tree [Agonis flexuosa]; Carob Tree [Ceratonia siliqua]; Australian Willow [Geijera parviflora]; Sweet Hakea [Hakea suaveolens]



- Medium to large evergreen or deciduous tree (to 50-foot tall at maturity)
- Secondary Size: Large specimen tree with picturesque form used to punctuate and identify key spaces and provide landmark feature
- Minimum 24-inch-box at installation
- Use upright or narrow form trees when planting close to buildings
- Tolerances: medium to high wind tolerance; tolerant of part to full shade; healthy in paving
- Minimal root disruption when planted in paving
- Low water usage
- Recommended species: Brisbane Box [Lophostemon confertus]; Lemon Eucalyptus [Corymbia citriodora]; Primrose Tree [Lagunaria patersonii]; Catalina Ironwood [Lyonothamnus floribundus]; Holly Oak [Quercus ilex]; Coast Live Oak [Quercus agrifolia]

4.6 Planting, Ecology, and Habitat

Planting design is a key element that can add ecological and habitat value to open space design. Ground level planting within the Power Station's open spaces will be integrated with active use of the park and planted with resilient native, climate-appropriate and climate-adaptive, non-invasive species that perform ecologically and aesthetically.

The Power Station's open spaces, with their active programing and location on the Bay, will be a learning environment where visitors can engage with the plants that thrive in this unique place.

GUIDELINES

4.6.1 Plants: Site and Program Specificity

Plant species shall be selected for their adaptability to particular site conditions and programmatic needs of each space, including foot traffic and active and passive uses.

4.6.2 Plants: Water Use

Specify low-water use plants. Use native species and climate-adapted species.

4.6.3 Invasive Plants

Non-native invasive plants shall not be used.

4.6.4 Plant Selection

Trees, understory, and stormwater garden plants should contribute functionally and aesthetically to the park's overall design concept and experience. See Figure 4.6.2 for an example shrub and groundcover palette. See Section 4.7 for suggested stormwater garden plant palettes.

CONSIDERATIONS

4.6.5 Plant Selection

Trees and plants should contribute to the goal of biodiversity and increased habitat value. Species with habitat value include those that provide nectar and fruit for insects and birds and shelter for birds.

4.6.6 Recycled Water and Plant Selection

When using recycled water in irrigation, select plants that can tolerate the salinity levels of the recycled water, which may be higher than potable water. Consult the California Department of Water Resources (www. ca.gov) for guidance and a recommended list of plants with high tolerance of salt in irrigation water.

Figure 4.6.1 Native Coastal Planting





Planting, Ecology, and Habitat

Figure 4.6.2 Example Shrub and Groundcover Palette



4.7 Stormwater Management

The Power Station's landscapes and building systems will be designed to work together to conserve, reuse, and filter water.

The project will be designed to integrate low impact development (LID) elements with stormwater best management practices (BMPs) to achieve compliance with San Francisco Stormwater Management Requirements (SMR). LID elements will include reducing stormwater runoff from impervious surfaces by integrating landscaping, permeable surfaces, rainwater harvesting and green roofs. Stormwater management BMPs include primarily plant based BMPs, such as bioretention areas, rain gardens, flowthrough planters and green roofs. Infiltration BMPs may be also considered, but it is anticipated that the low infiltrating soils and documented underlying environmental contamination will challenge the feasibility of permeable pavement use as a stormwater BMP on site. The stormwater treatment BMPs will treat. reuse or infiltrate stormwater, reduce volume and runoff rates prior to discharging to the Bay or the downstream system. The project stormwater management system includes areas with a Combined Sewer System and other areas with a Separated Storm Drain System. The delineation of these areas is depicted on Figure 4.7.1. The stormwater management performance requirements for each of these areas are generally described below. Refer to section 16.1 of the Infrastructure Plan for additional information. Treatment and reduction of runoff as a result of said BMPs will prevent pollutants from washing into the Bay and reduce the project's impacts on the City's downstream system. Co-benefits, such as urban greening, improved air quality, and reduced urban heat island effect, can be provided by implementing stormwater Best Management Practices.

Site hydrology will be considered in the design of open spaces and streets in a systematic way, with green infrastructure as an integrated part of the public realm. Bioretention treatment areas (including stormwater treatment gardens & bioswales) will be seamlessly incorporated into the spatial, topographical, and circulation design of the Power Station's open spaces.

STANDARDS

4.7.1 Stormwater Management



Stormwater Control Plans will be provided to the San Francisco Public Utilities Commission (SFPUC) for review and approval.

GUIDELINES

4.7.2 Stormwater Management



a) General: The public realm at the Power Station shall include stormwater management for impervious areas within the streets and open space network. The stormwater runoff from impervious surfaces will be directed to primarily plant based stormwater management features, such as bioretention areas, rain gardens, and flow-through planters.

b) Conceptual Management Strategy - Separated Storm Drain Areas: Within the Separated Storm Drain Areas of the project, stormwater treatment shall be handled through plant based treatment BMPs integrated to the open spaces and streets. The treatment BMPs will include specific localized treatment areas distributed throughout the open space and street areas. The treatment BMPs will be centralized where feasible, which may include larger stormwater gardens around the Stack, and in Power Station Park, to which runoff is conveyed by gravity or force main for treatment. Figure 4.7.1 illustrates the conceptual management strategy.

C) Conceptual Management Strategy - Combined Sewer Areas. Within the Combined Sewer Areas of the project, stormwater volume and rate reductions for the open space and streets shall be achieved. This shall be handled through a combination of plant based stormwater management BMPs integrated to the open spaces and streets as well as credits achieved by excess volume and rate reductions from the buildings within the Combined Sewer Area. Figure 4.7.1 illustrates the conceptual management strategy.

4.7.3 Stormwater Treatment Area Requirements: a) Localized Treatment:

Required treatment volume for each street and open space shall be accommodated and located as close to the source as possible unless stormwater can be treated in centralized locations.

b) Minimum Treatment Footprint Area and Performance Requirements:

Minimum stormwater treatment footprint areas noted in the Infrastructure Plan shall be provided for treatment of impervious surfaces in each open space as well as potential watershed-scale treatment in large feature gardens around the Stack. Stormwater facilities shall conform to applicable performance and area requirements per the Infrastructure Plan, Chapter 15.

Combined Separate Sanitary Sewer Storm Drain Areas Areas HUMBOLDT STREET BLOCK 8 BLOCK 5 BLOCK 7 BLOCK 9 BLOCK 12 BLOCK 11 23RD STREET STORMWATER MANAGEMENT **Bioretention Zones**

Figure 4.7.1 Conceptual Stormwater Management and Bioretention Zone Map

Bioretention Treatment Areas

GUIDELINES

4.7.4 Stormwater Management Plant-Based BMP Design

Stormwater gardens within open spaces shall adhere to accessibility and safety standards. If directly adjacent to a pedestrian area, the top of the planted surface shall be no greater than 18 inches below the surface of adjacent paving. Design of stormwater gardens shall be integrated into the design of open spaces. See Figures 4.7.2 and 4.7.3 for ways to integrate stormwater landscaping into open spaces and a suggested plant palette.

CONSIDERATIONS

4.7.5 Stormwater Management Plant-Based BMP Design

Stormwater gardens may integrate interpretive elements highlighting the site's historical transformation from electrical distribution systems to green infrastructure. Salvaged infrastructure elements from the site may by incorporated into design of stormwater treatment gardens.

Figure 4.7.2 Precedent Images: Plant-Based BMPs Integrated into Open Space Design









Figure 4.7.3 Suggested Plant Palette for Stormwater Treatment Gardens



Note: Designs should rely on native plants that tolerate wet and dry conditions and are adapted to coastal climate. Refer to SFPUC-approved list of stormwater plants at SFPlantfinder.org.

4.8 Site Irrigation

Irrigation is an essential element of plant health and should is folded into the site hydrology strategy for the Power Station.


STANDARDS

4.8.1 Site Irrigation

a) Irrigation During Plant Establishment Period:

All plant species shall receive establishment irrigation for a minimum of three years. Where required, permanent irrigation infrastructure shall be provided.

b) Irrigation Efficiency:



c) Recycled Water:

On-site irrigation shall comply with the San Francisco Non-Potable Water Ordinance.

d) Monitoring:

Irrigation flow meters for all irrigation hydrozones shall be installed to record and monitor water use across the site.

GUIDELINES

4.8.2 Plant Species Hydrozones



Planting design shall optimize irrigation efficacy by grouping plants with similar water needs into efficient irrigation hydrozones.

CONSIDERATIONS

4.8.3 Pressurized Drip Irrigation at Turf Areas



Overhead spray irrigation for turf areas should be avoided. Use of pressurized drip irrigation tubing at turf areas is recommended.

OPEN SPACE

[This page intentionally left blank.]

4.9 Site Furnishings

Furnishing in the public open spaces of the Power Station will help establish the identity of the district and neighborhood. Along with planting, lighting and paving, furnishing is an integral part of what makes the open space an inviting and comfortable part of the public network. The Power Station neighborhood will implement a district-wide approach to furnishing that allows for variety while establishing a unified look and feel that contributes to a unique neighborhood identity.

- Placement of the above-mentioned furnishings in open spaces may not interfere with curb ramps, access to the building, driveways or access to any fire escapes in any
- The above mentioned furnishings must be removable at the end of business hours.

4.9.3 Tree Grates

Tree Grates, where provided, shall be made of cast iron or steel and incorporate decorative design (see Figure 4.9.2 for example image). Tree Grates shall meet ADA path of travel guidelines and be flush with adjacent sidewalks and other pedestrian areas.

STANDARDS

4.9.1 Seating Location

Seating shall be placed outside of the Pedestrian Throughway with a minimum of two-foot buffer (leg room) between the seat and Pedestrian Throughway. See Figure 4.9.1.

4.9.2 Outdoor Cafe and Restaurant Seating

Outdoor café and restaurant seating is allowed in all open space areas. Waterfront Outdoor Food Service Areas are subject to the controls in Section 4.19. while all other open space areas are subject to the following standards.

Movable furnishings including tables, chairs. umbrellas, heat lamps, planters, and other moveable furniture and fixtures shall be permitted in open spaces adjacent to eating and drinking establishments.

• Placement of the above-mentioned furnishings adjacent to businesses must be within 20 feet of the building face and not obstruct the Pedestrian Throughway.

GUIDELINES

4.9.4 Bollards

Bollards that separate pedestrian traffic from vehicular traffic in curbless conditions shall be selected and spaced to prevent automobiles from entering pedestrian-only Throughways, Lighted bollards are allowed.

4.9.5 Waste Receptacles

Waste receptacles shall be located at areas of high pedestrian traffic and near seating areas and picnic areas. They shall be located outside of the Pedestrian Throughway. Receptacles shall accommodate landfill waste, recycling, and compost. Receptacles shall be rain protected and possess side-opening for collection.

4.9.6 Outdoor Grills

Outdoor public grills shall be located at the Point. Select grills made with durable materials and finishes such as cast iron or weathering steel. Grills shall be selected for ease of maintenance. Select a standard product with readily replaceable parts.

4.9.7 Seating Character

Seating shall be selected or designed to be inviting, comfortable, and accessible to all people. Benches, whether standard or custom designed, shall be functional, and support a high-quality public realm. Seating materials shall be chosen for suitability for high-use in an urban setting, and ability to withstand the local marine environment. Seating shall be constructed of durable materials such as heavy timbers, hardwoods, cast iron, steel, and concrete.

4.9.8 Furnishing Compatibility with Historic District

While a variety of seating and other furnishing is acceptable, effort shall be made to unify individual open spaces with a cohesive family of seating and other furnishing. Furnishings should be compatible with and reflect the scale and industrial character of the district and be utilitarian in materiality and design. Interpretive elements may be incorporated into Furniture design.

CONSIDERATIONS

4.9.9 Furnishing - Responsible Material Use



Furnishings should incorporate sustainable materials, such as recycled metals, sustainably sourced hardwoods, and locally sourced materials.

4.9.10 Furnishing Coordination with Pier 70



Waterfront site furnishing and fixtures should be coordinated with the Pier 70 project to ensure a general sense of cohesiveness and consistency across the two projects. Fixtures and furnishings should not be identical to those of Pier 70, but belong to a similar aesthetic family.

Figure 4.9.1 Location Map of Furnishing Types in Public Open Spaces

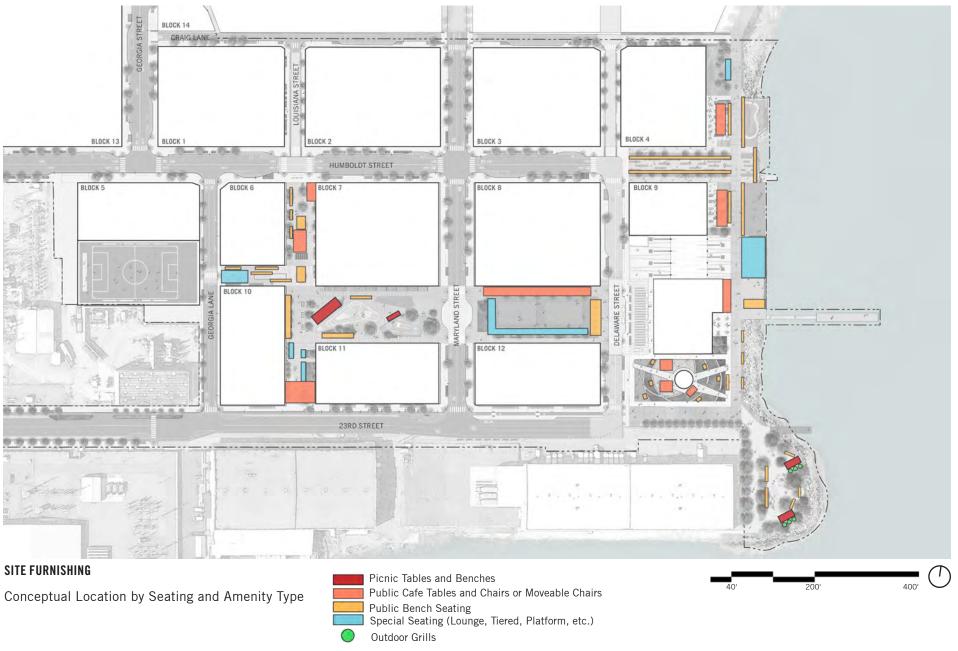


Figure 4.9.2 Site Furnishing Character: Precedent Images



Custom cast-iron park benches, with and without backs.



Manufactured park bench with back (cast aluminum and hardwood).



Modular benches with backs.



Waterfront platform benches directed toward view.



Plaza platform benches.



Waterfront seating in durable materials.



Architectural tiered seating / lounge.



Lounges



Cast-iron tree grate, ADA-compliant, in attractive modern pattern.



Moveable chairs.



Whimsical moveable seating.



Picnic tables in durable materials.



Public Grills



Weathered steel bollards.



Waste receptacles.

4.10 Bicycle Parking - Open Space

High quality bicycle racks shall be located throughout the public open spaces of the Power Station neighborhood to provide secure short-term bicycle parking for transportation-focused and recreational biking, and to express a commitment to cyclist and bicycle culture.



A Bicycle Corral With Circular Bicycle Racks

STANDARDS

4.10.1 Bicycle Rack Placement

The location of bicycle racks will follow requirements outlined in the standards and guidelines below.

- Locate a minimum of five bicycle racks (ten bicycle parking spots) within each of the Power Station's nine open space areas.
- Bicycle racks will be located in well-lit, highly visible locations. Bicycle racks will be easy to use and conveniently located within parks and plazas adjacent to bicycle circulation routes.
- Placement shall maintain at least a six-foot clear walkway, to comply with the ADA.
- At least three feet of clearance between bicycles parked at racks and any other furniture must be maintained, except other bicycle racks, which should be placed a minimum of every three feet on center.
- Bicycles parked at a rack shall have a minimum one foot clearance from utility vaults.

GUIDELINES

4.10.2 Design of Bicycle Racks

Bicycle rack design shall generally be standard for each open space area. For artistic or custom designed racks, see "considerations" below.

CONSIDERATIONS

4.10.3 Bicycle Corrals


Bicycle corrals are encouraged where space allows.

4.10.4 Artistic and Custom Designed Bicycle Racks

Artistic bicycle racks or custom designed racks integrated with other elements are permitted so long as they adhere to the following requirements.

- Bicycle racks shall be durable and practical with a
 design similar in function to the inverted "U" or the
 Welle Circular bicycle rack. Bicycle racks should be
 made of galvanized or stainless steel materials or cast
 iron. Powder-coated finishes are not allowed.
- All elements of a bicycle rack should have a minimum two inch diameter (or two inch square tube). Racks should offer a minimum of two points of support for bicycles unless the rack can support a bicycle in two places, such as a post and ring configuration.
- Offer visibility to pedestrians with a minimum height of 31 inches.
- Allow locking of bicycle frames and wheels with U-Locks.
- Racks shall not require lifting of the bicycle.

Figure 4.10.1 Conceptual Locations for Bicycle Parking in Public Open Spaces

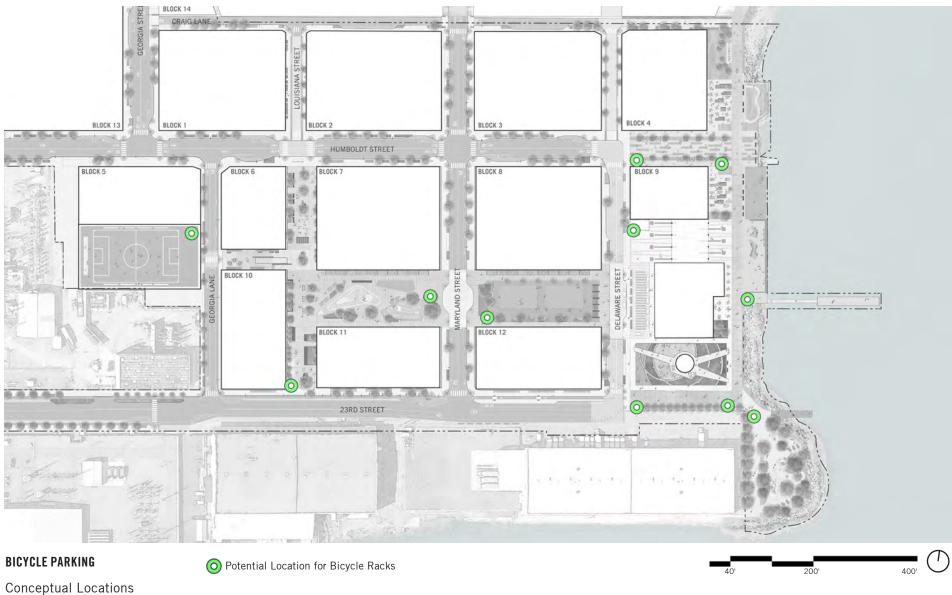

4.11 Paving and Materials

Paving will be a key component that defines the character, connectivity, and identity of the Power Station's varied open spaces. Paving strategy should be considered as an interconnected site-wide system that activates the public realm and contributes to the overall pedestrian and bicycle circulation on the site. All paving in areas with high pedestrian traffic will be designed to facilitate universal accessibility. Paving connections to surrounding streets should be carefully considered for their impact on the larger neighborhood. Paving design in open spaces shall be carefully considered with the placement of lights, light pull boxes, utilities, utility vaults, and other surface expressions of underground utilities.

STANDARDS

4.11.1 Surfacing at Tree Planting

Where trees are planted in pedestrian areas, tree well surfacing material shall be within two inches of adjacent pedestrian paving.

4.11.2 Paving: Heat Island Effect

Materials that reduce the urban heat island effect by using pavement with a Solar Reflectance Index (SRI) of 29 or higher shall be selected for use in areas that are predominantly unshaded by tree canopy or buildings.

GUIDELINES

4.11.3 Surfacing at Tree Planting

Where trees are planted in paving, surfacing material shall allow air and water to reach tree roots.

4.11.4 Material Quality and Consistency

Paving and built-in site elements shall be comprised of high-quality materials and finishes. All materials shall be durable and capable of withstanding high-intensity use in the Bay environment. All material textures in designated path of travel and accessible use areas shall be ADA-compliant.

4.11.5 Paving Types

Paving should be a key component that defines the character, connectivity, and extent of the Power Station's varied public realm.

a) Special Paving at Plazas

Use contrasting, high-quality paving that distinguishes plaza spaces as areas that prioritize pedestrians and encourage gathering. Plaza spaces should incorporate concrete unit pavers, stone pavers, or cast-in-place concrete with integral color and/or exposed aggregate finish. Refer to paving and materials images and descriptions in Figure 4.11.1.

b) Blue Greenway

Standard or enhanced cast-in-place concrete is recommended for the Blue Greenway.

4.11.6 Character and Uniformity

Paving and hardscape elements should incorporate industrial elements and materials into the design. Design elements should use simple geometric forms, regular or repeating paving patterns and utilitarian materials such as simple masonry pavers.

CONSIDERATIONS

4.11.7 Permeable Paving



Where feasible and where underlying soil conditions allow, permeable paving, such as pre-cast permeable concrete unit pavers may be used.

4.11.8 Wood Decking



Durable hardwood decking is allowed. Consider using wood decking at Bay overlooks and at waterfront terraces. Use sustainable forest products (FSC-certified) or recycled wood.

4.11.9 Responsible Material Use



Use sustainable paving materials, including recycled materials, local materials, and sustainably sourced materials.

4.11.10 Character and Uniformity

Paving contrast may be introduced through color or geometric variation, textural variation within a single paving module, integrated lights, or juxtaposition of scale or material. Salvaged masonry units from the site's existing buildings should be included if feasible and safe for public use.

4.11.11 Blue Greenway

Coordinate paving design with the Pier 70 multi-use trail to establish paving identity and continuity with the Pier 70 design.

Figure 4.11.1 Example Paving Types for Open Spaces



Cast-in-Place Concrete with Integral Color and/or Exposed Aggregate Finish



Enhanced Cast-in-Place Concrete with Saw-Cut Joints



Pre-Cast Concrete Unit Pavers and Pre-Cast Permeable Concrete Unit Pavers



Wood Decking Made of Durable Hardwood Appropriate for Coastal Conditions



Enhanced Concrete and/or Pre-Cast Unit Pavers with Contrasting Pattern



Stone Unit Pavers

4.12 Ground Level On-Structure Open Space Design


Several portions of the Power Station's open spaces may be built over structured parking. These areas include Humboldt Street Plaza, Power Station Park, Craig Lane Paseo, and Louisiana Paseo (See Figure 4.12.1). If structured parking is planned beneath any of these open spaces, the following standards shall be followed to ensure that below grade structures are designed to allow for viable landscapes in the open spaces over these structures.

STANDARDS

4.12.1 Structural Coordination

Below grade structures over which future open spaces will be built shall be designed to withstand and support robust and viable landscapes. Structures shall allow sufficient space between the top of the structural slab and the finished grade in the open space to allow for paving areas, ground cover planting, tree planting, drainage, footings for play structures, overhead structures, and large seating elements.

- a) Structures shall accommodate 18 to 24 inches of soil depth in groundcover planting areas.
- b) Structures shall accommodate 36 to 48 inches of soil depth for tree planting.
- c) Structures shall allow sufficient depth for paving and drainage.
- d) Structures shall be designed to withstand anticipated loading of maintenance vehicles.
- e) All on-structure areas designated for emergency vehicle access (EVA) shall be engineered to withstand emergency vehicle loads. (See Figure 5.8.1)

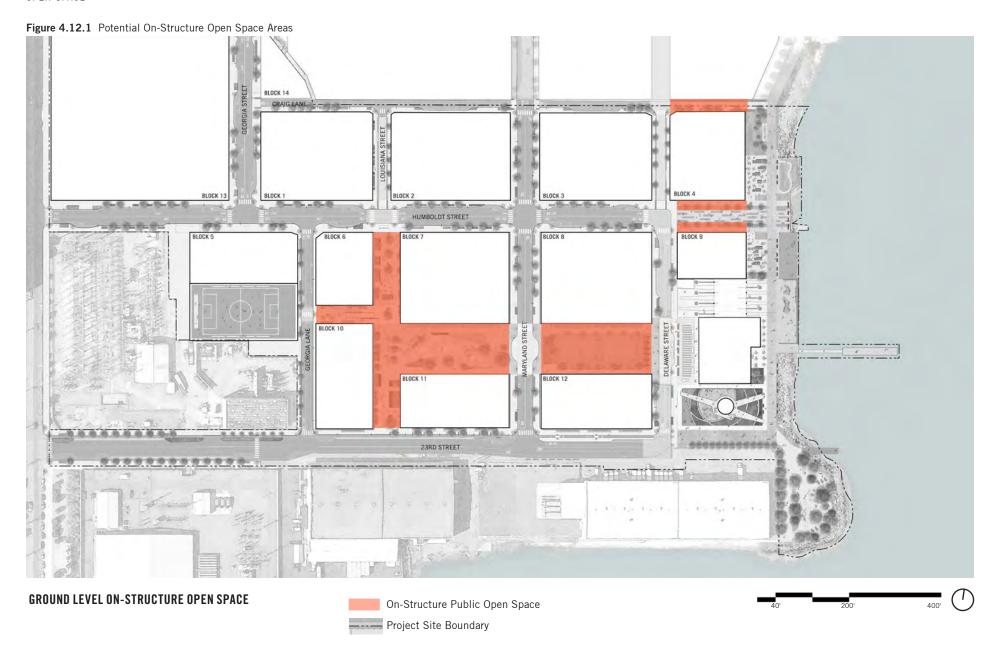

4.13 Wellness

Health, fitness, and wellness will be a primary focus of the Power Station's open spaces. This includes open turf areas for yoga and fitness classes, play areas for all ages, a generous waterfront trail for biking and walking, and athletic fields for a range of age groups and activities. Figure 4.13.2 depicts the health and wellness activities that are envisioned throughout Power Station open spaces.

Figure 4.13.1 Health and Wellness Precedent Images



Temporary Farmer's Market In Open Space



Adult Fitness Playground



Rooftop Under-10 Soccer Field





Fitness Activities on Lawn

Figure 4.13.2 Health and Wellness Location Map



4.14 Public Art

The Power Station's open spaces will provide opportunities to integrate interactive art and recreational amenities that may also act as interpretive elements for the site's unique history and it's sustainable future.

Public art of scale can contribute significantly to the urban design of the Power Station when placed at key locations, such as the terminus of a view corridor, to draw visitors through the public realm to a point of destination. Public art can also contribute to wayfinding by acting as a landmark and memorable feature within the public realm network.

CONSIDERATIONS

4.14.1 Public Art Locations

Permanent Public Art pieces may be located in Waterfront Park, the Point, Humboldt Street Plaza, Power Station Park, and Louisiana Paseo. Suggested locations within these open spaces for public art can be found in Figure 4.14.1. Temporary public art may be located in any open space and shall comply with all controls for those spaces.

4.14.2 Public Art Interpretive Elements

Public art installations may relate to, describe, or otherwise engage with the layered history of the site doubling as an interpretive exhibit. Public art installations may also relate to or highlight the unique climatic / ecological conditions of the site.




Public Art



Sculpture Play

Figure 4.14.1 Potential Locations for Public Art

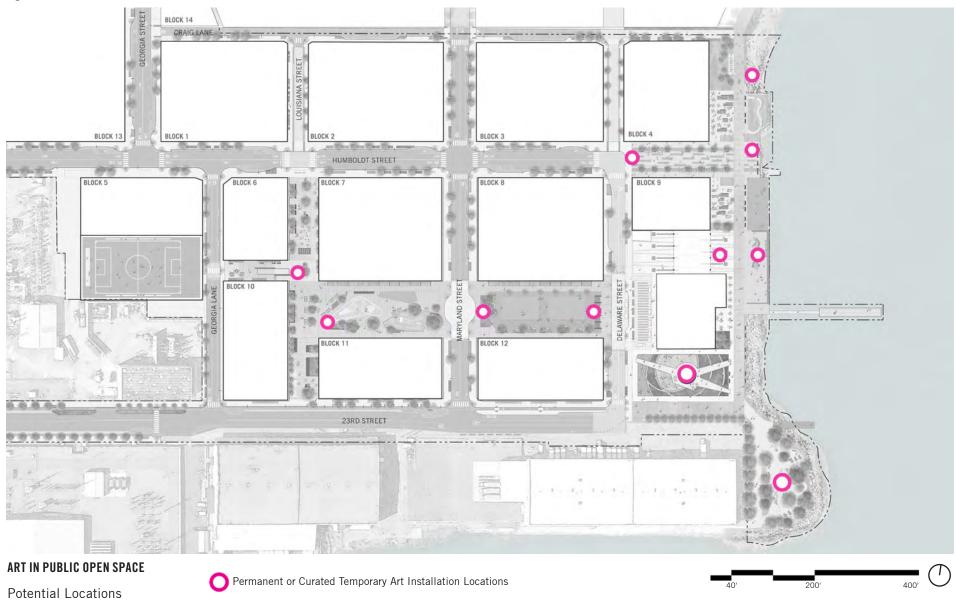

4.15 Mobile Carts and Semi-Permanent Kiosks in Open Space

A limited number of mobile or semi-permanent food service and/or retail carts or kiosks will be allowed to operate within the open spaces of the Power Station. (See Table 3.1.1 for number and size restrictions within specific open spaces.)

The following standards apply to these carts and kiosks.

STANDARDS

4.15.1 Location of Carts and Kiosks

Kiosks and carts shall be located outside of primary pathways and shall never block accessible paths of travel or areas for Emergency Vehicle Access (EVA). See Figure 4.15.1 for allowed zones and potential locations of kiosks and carts within public open space areas. (See Table 3.1.1 for limits on the number of carts and kiosks per open space location.)

4.15.2 Size of Carts and Kiosks

The maximum allowed gross square foot area for any cart or kiosk located within public open space is 200 square feet.



Semi-Permanent Retail Kiosk



Mobile cafe kiosk



Semi-Permanent Cafe Kiosk in a Modified Shipping Container



Semi-Permanent Maker Kiosk

Figure 4.15.1 Potential Locations for Mobile Carts and Semi-Permanent Kiosks BLOCK 14 BLOCK 13 BLOCK 8 BLOCK 6 BLOCK 7 BLOCK 5 BLOCK 10 23RD STREET **MOBILE CARTS AND KIOSKS** Potential Location for Semi-Permanent Retail/Food/Beverage Kiosk Potential Location for Mobile Retail/Food/Beverage Kiosk Allowed Zones Allowed Zone for Semi-Permanent or Mobile Retail/Food/Beverage Kiosks and Carts

4.16 Waterfront Park

Waterfront Park at the Power Station will be a vibrant, active park that emphasizes the relationship between people and the Bay. The park will provide an array of amenities for both the larger Bay Area population and local neighborhood communities within San Francisco. The Waterfront Park design will allow expansive views of the Bay and environs and increase physical access to the waterfront and to the Bay itself.

A generous new portion of the Blue Greenway will link a series of unique public spaces that offer a range of activities.

The general standards and guidelines for planting, stormwater, access, sea level rise, and program delineated in this section apply to the entire open space area shown in the Waterfront Park Conceptual Plan Overview in Figure 4.16.2. In addition, this section describes specific standards and guidelines for the Waterfront Park Blue Greenway, recreational dock, Bay overlooks, Bay shore planting and stormwater gardens, and outdoor seating areas.

This section should be read in conjunction with the sections that cover in detail the distinct spaces of Waterfront Park: the Point, Stack Plaza, Turbine Plaza, and Humboldt Street Plaza.

STANDARDS

4.16.1 Public Access

Waterfront Park at the Power Station shall provide public access to the waterfront. The Blue Greenway and the majority of the adjacent open space shall be open to the public, subject to temporary closures for permitted events, maintenance and emergencies. For security and safety, the recreational dock, if provided, may have restricted access at certain times of the day and during storm events if wave action makes use unsafe. An enclosed portion of Turbine Plaza between Unit 3 and Block 9 will be open to the public during business hours but may be closed to the public at select times for private events. See Section 4.22, Turbine Plaza.

4.16.2 Publicly Accessible Restroom

A publicly-accessible restroom shall be located in Block 9. (See Section 6.11.7 and 6.13.)



Figure 4.16.1 Waterfront Park Bird's-Eye View Looking West

GUIDELINES

4.16.3 Visual Access

Waterfront Park shall provide views to the water from both sides of the Blue Greenway. First branching height and spacing of trees shall facilitate these views.

4.16.4 Public Uses and Amenities


Waterfront Park shall provide both active and passive program uses along with waterfront ecological amenities, including native Bay planting with habitat value. See Figure 4.18.1 for conceptual Waterfront Park program zones.

4.16.5 Stormwater Treatment Areas



Waterfront Park shall include stormwater treatment gardens of varying sizes to treat runoff from impermeable surfaces. Stormwater gardens must be functionally and aesthetically integrated into the experience of the park. See Section 4.7 for general planting standards and guidelines for stormwater treatment areas.

Figure 4.16.2 Waterfront Park: Plan Overview

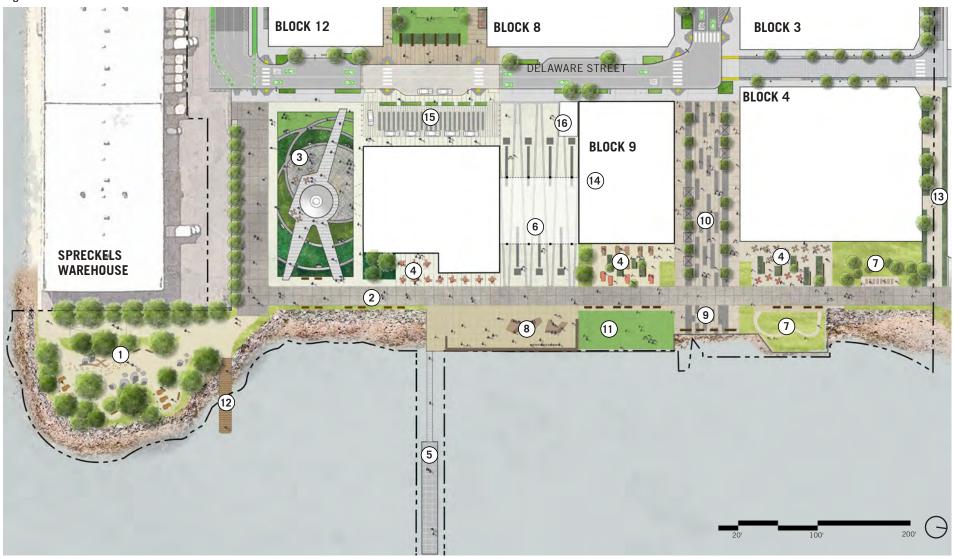

WATERFRONT PARK

Concept Plan Overview

- 1 The Point: Section 4.20
- (2) Blue Greenway
- 3 Stack Plaza: Section 4.21
- (4) Outdoor Food Service Area (8) Bay Overlook Terrace at
- (5) Potential Recreational Dock
- (6) Turbine Plaza: Section 4.22
- (7) Bay Shore Planting
- Turbine Plaza
- Bay Overlook Terrace at Humboldt (9) Street Plaza
- Humboldt Street Plaza: Section 4.24
- (11) Waterfront Fitness Lawn / Multi-Use Lawn
- (12) Bay Overlook at the Point

- (13) Craig Lane Paseo
- (14) Publicly Accessible Restroom
- (15) Unit 3 Entry Plaza: Passenger Loading and Fire Access: Section 4.23
- (16) Pump House

4.17 Waterfront Park—Circulation

STANDARDS

4.17.1 Waterfront Circulation: Blue Greenway

The waterfront multi-use trail, the Blue Greenway, shall provide a direct north-south waterfront route for pedestrians and bicyclists along the length of Waterfront Park, connecting to Pier 70 at the north and 23rd Street at the south. The Blue Greenway shall not be accessible to automobiles or trucks (with the exception of emergency and maintenance vehicles).

4.17.2 Blue Greenway: Clear Width

The Blue Greenway shall provide a clear width of 20 feet.

4.17.3 Blue Greenway: Universal Access

The Blue Greenway shall be ADA compliant.


4.17.4 Blue Greenway: Bicycle Connections

The Blue Greenway shall connect to bicycle facilities on 23rd Street. Signage, warning cues and controls shall be included in the multi-use trail to minimize pedestrian and bicycle conflict.

GUIDELINES

4.17.5 Pedestrian Throughway Connections at Key Places

Waterfront Park circulation shall reinforce important Pedestrian Throughway connections between the waterfront multi-use trail and the other open space areas, including clear east-west pedestrian routes with linkages to 23rd Street, Power Station Park, and Humboldt Street, and to Delaware Street through Stack Plaza, Turbine Plaza, Humboldt Street Plaza, and Craig Lane.

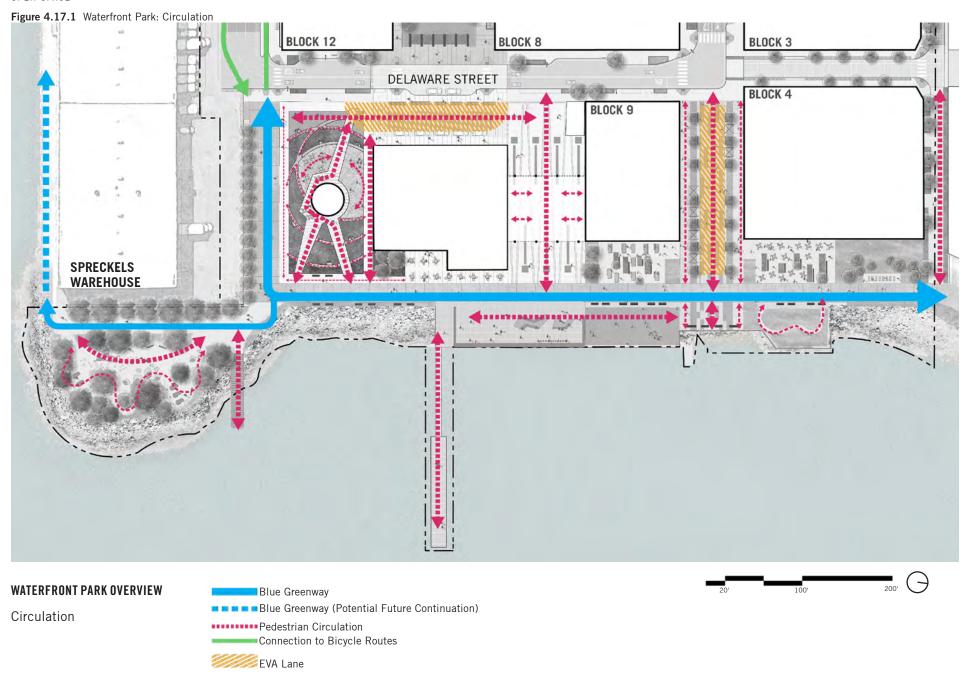

4.18 Shoreline Open Space Elements—Program and Design

STANDARDS

4.18.1 Bay Overlook Terrace at Turbine Plaza

Opposite Turbine Plaza, on the water side of the Blue Greenway, an open, accessible Bay overlook terrace shall be designed to allow pedestrian access to the water's edge at the elevation of the multi-use trail. Comfortable seating constructed of materials that are durable and appropriate for the marine environment, such as concrete, steel, cast iron, and hardwood shall be provided at this overlook.

4.18.2 Bay Overlook Terrace at Humboldt Street Plaza

A waterside plaza shall be designed as an extension of Humboldt Street Plaza, allowing public access to the water's edge at the terminus of Humboldt Street. The same paving type and pattern used at Humboldt Street Plaza shall continue into the waterside overlook terrace, broken only by the Blue Greenway paving.

4.18.3 Public Seating

Public seating shall be designed and selected to be integrated with elements in the waterfront landscape. Permanent public seating shall be provided at overlook terraces and along the Blue Greenway.

4.18.4 Fitness and Multi-Use Lawn

An open natural turf area for picnicking and exercise shall be designed on the water side of the Blue Greenway east of Block 9.

4.18.5 Bay Shore Planting Areas

Planted areas, featuring a diverse palette of Bayappropriate native plants, shall be incorporated into the design on both sides of the Blue Greenway. Pedestrian path access is allowed in these areas. See Section 4.6 for example plant palettes for these areas.

4.18.6 Stormwater Management

Stormwater management gardens shall be designed as integral parts of open space designs and as integral parts of larger planting designs. See Section 4.6 for general planting standards and guidelines for stormwater treatment areas. Refer to Figures 4.7.2 and 4.7.3 for examples of integrated stormwater management design and a suggested stormwater management plant palette.

GUIDELINES

4.18.7 Bay Overlook Terrace at Turbine Plaza

Comfortable seating constructed of materials that are durable and appropriate for the marine environment, such as concrete, steel, cast iron, and hardwood shall be provided at this overlook.

4.18.8 Blue Greenway Paving

Blue Greenway paving should be coordinated with the multi-use trail at the Pier 70 project to either match or complement paving finish, color, and score pattern. Cast-in-place concrete with integral color and/or light sandblast/waterwash finish is recommended. The Blue Greenway paving section should be designed to withstand use by mid-sized maintenance trucks.

CONSIDERATIONS


4.18.9 Recreational Dock

The Project Sponsor may construct a recreational dock in the location shown on the Waterfront Park plan (Figure 4.16.2). The design of the dock shall comply with accessibility standards for recreational docks.

4.18.10 Bay Overlook Terrace Paving

Bay overlook paving should be special paving that contrasts with and complements Blue Greenway paving. Durable hardwood decking, unit pavers, and/ or concrete with special finish and score patterns should be considered. If wood decking is used, special consideration should be given to using woods and finishes that can withstand maritime shoreline conditions and heavy pedestrian traffic.

^{*}See Sections 4.20 through 4.24 for detailed standards and guidelines for The Point, Stack Plaza, Unit 3 Entry Plaza and Passenger Loading, Turbine Plaza, Humboldt Street Plaza, and Craig Lane.

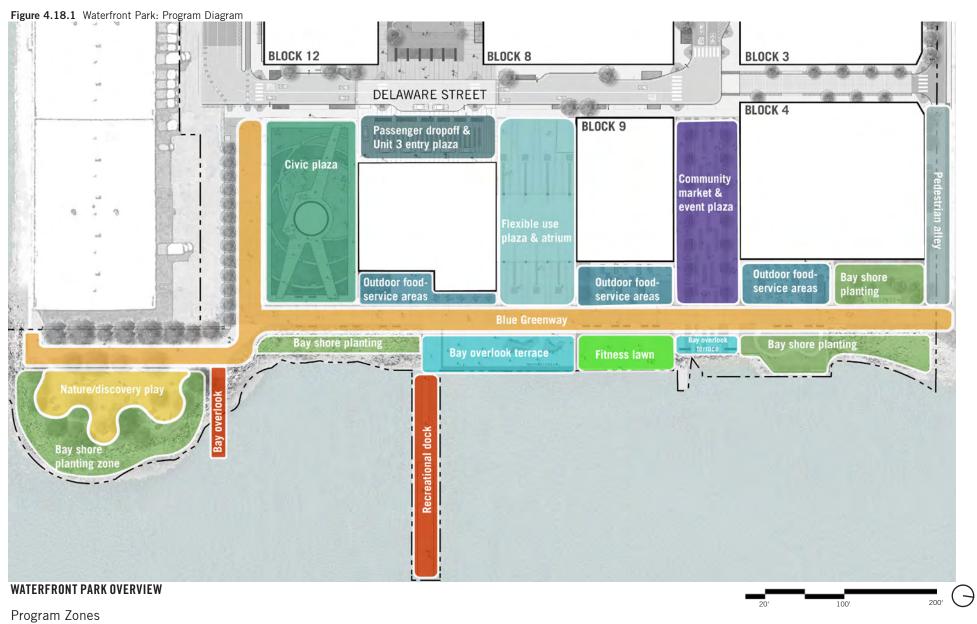

4.19 Waterfront Outdoor Food Service Areas

The Waterfront Park will provide many ways to experience the beauty of its special location along the Bay. One of these experiences will be outdoor dining or drinking. While the great majority of seating along the waterfront will be entirely public, some outdoor restaurant or cafe seating will enliven the waterfront experience at the Power Station.

STANDARDS

4.19.1 Waterfront Outdoor Food Service Areas

Permanent, semi-permanent and movable furnishings such as tables, chairs, umbrellas, heat lamps and fire pits for eating and drinking use shall be permitted on the east side of the buildings constructed on Blocks 4 and 9. The shaded areas in Figure 4.19.1 indicate potential locations for this use. Within these areas, up to 60 percent of the area may be reserved for exclusive use by eating and drinking establishments during business hours. The remainder of these areas shall be open to the public and shall not require patronage of any eating and drinking establishment.

GUIDELINES

4.19.2 Public Seating in Waterfront Outdoor Food Service Areas

Public seating must be of high quality and differentiated from reserved seating at adjacent eating and drinking establishments. Signage shall be provided to clearly indicate that public seating is open to the public without having to patronize the eating and drinking establishment.

4.19.3 Reserved Seating in Waterfront Outdoor Food Service Areas

Areas of reserved seating for eating and drinking establishment use during business hours must serve as attractive and functional public spaces during non-business hours. These spaces must include at least some permanent, non-movable seating.




Restaurant Seating Adjacent to Public Seating and Promenade



Cafe Seating Along the Waterfront

Figure 4.19.1 Waterfront Park: Outdoor Food Service Areas

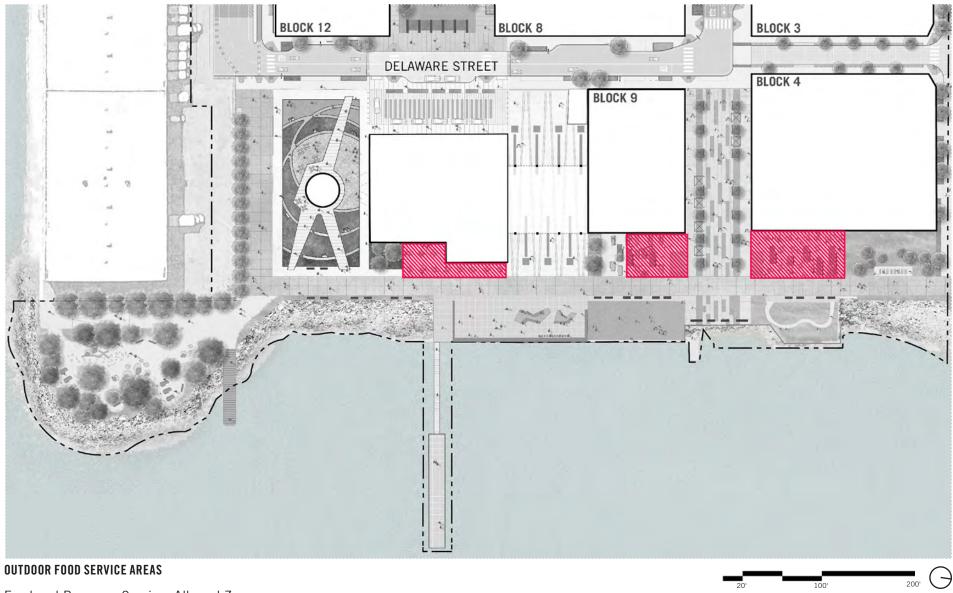

Food and Beverage Service: Allowed Zones

60% of Each Designated Area May be Used for Food and Beverage Service

4.20 The Point

Situated apart from the more social uses associated with the Unit 3 hotel, the Point will be a quieter place of natural planted areas, informal discovery play, and casual seating and picnicking. A Bay overlook, built upon the existing footprint of a decommissioned power plant intake structure, will allow visitors to walk out over the Bay and take advantage of the panoramic views of the East Bay, South Bay, and Bay Bridge. The plan for the Point includes a section of Blue Greenway that will allow for the future connection of the Blue Greenway system from the Power Station Waterfront to Warm Water Cove around the east and south sides of the existing Spreckels Warehouse. The Point may also include public art and/or elements of an interpretive program, such as interpretive exhibits.

STANDARDS

4.20.1 Circulation

A Pedestrian Throughway shall be established through the Point open space, including an accessible path of travel to each amenity in this area.

4.20.2 Blue Greenway Extension

A minimum 20-foot-wide section of the Blue Greenway shall be integrated into the design of the Point along its western edge. A planted buffer having a minimum width of eight feet shall be maintained between the Point's western property line and the future Blue Greenway extension behind the Spreckels warehouse and connecting to Warm Water Cove.

4.20.3 Amenities

The following amenities shall be provided within the Point: picnic areas with picnic tables and benches, discovery play features, seating, lighting, outdoor grills, and waste receptacles.

4.20.4 Program

Temporary programs and activities shall be permitted to occur on the Point.

4.20.5 Planting

Tree, shrub and groundcover planting shall adhere to the general standards and guidelines set forth in Sections 4.5, 4.6, and 4.7.

GUIDELINES

4.20.6 Materials

Natural paving materials such as crushed stone, stabilized crushed stone and bark mulch shall be selected to enhance the natural aesthetic of this area.

4.20.7 Furnishings

See Section 4.9 for general requirements. The look and feel of furnishings in this area should fit with the theme of a natural shoreline environment. Durable hardwood, cast-in place concrete, or precast concrete are preferred furnishing materials. Locate seating near natural play area. Permanent Grills are allowed.

4.20.8 Lighting

See Section 7 for general requirements. Maintain minimum light levels for safety at primary amenity areas. Shoreline planted areas should be kept free of lighting.

4.20.9 Discovery Play Area

Site elements that allow for informal play and discovery should be integrated in the design of the park. Elements such as boulders, reclaimed logs and stumps are examples of site elements that could be considered "discovery play" elements. Salvaged materials and

artifacts from the site may be incorporated into this area if feasible and safe for public use.

4.20.10 Bay Overlook at 23rd Street: Paving

The paving, railings and other features of this overlook should be integrated in the overall design theme of a natural shoreline environment. Durable hardwood decking, unit pavers, and/or concrete with special finish and score patterns should be considered. If wood decking is used, special consideration should be given to using woods and finishes that can withstand maritime shoreline conditions and heavy pedestrian traffic.

CONSIDERATIONS

4.20.11 Furnishings

Consider shaded seating within the Point.

4.20.12 Bay Overlook at 23rd Street

A Bay overlook should be designed in the area of the existing intake structure at the end of 23rd Street providing access to the Bay edge if the existing structure is found to be structurally adequate. If the existing structure is not structurally adequate to support a Bay overlook, the existing intake structure may not be incorporated into the design.

4.20.13 Transition Between 23rd Street and The Point

At the intersection of the Point and the 23rd Street/Blue Greenway extension, consider extending Blue Greenway paving into the Point to create a transition between the industrial character of 23rd Street and the more natural setting of the Point.



Informal Open Space for Picnicking and Play

- 1 Picnic Area
- 2 Discovery Natural Area and Informal Play
- (3) Bay Shore Planting Area
- 4 Blue Greenway
- 5 Stack Plaza
- **6** Spreckels Warehouse
- 7 Bay Overlook at 23rd Street
- 8 Blue Greenway Extension
- 9 Seating

The Point



Figure 4.20.3 The Point: Section Looking North

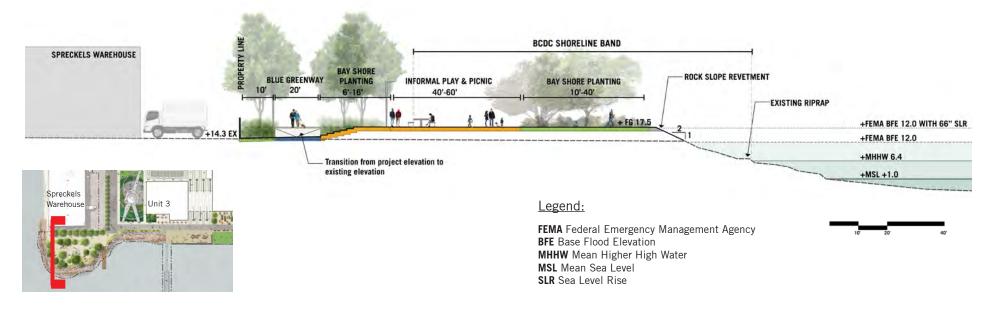


Figure 4.20.4 The Point: Precedent Images









Picnic Area

Bay Shore Planting Area

Discovery Natural Area and Informal Play

Discovery Natural Area and Informal Play

4.21 Stack Plaza

The Stack is the Power Station's most monumental feature, an icon in the neighborhood visible from many vantage points throughout the city. Stack Plaza is, accordingly, the signature public space of the Power Station. It will be a formal civic space that provides a sense of arrival and encourages visitors to linger, gather, and appreciate the Stack in all of its roles—as a monument, a marker of the site's industrial past and a focal point along San Francisco's Central Waterfront. The Stack will remain as a visual landmark that orients visitors and recalls the site's history as a power plant, but it should also assume new life as a place for art, social space, or unique cafe or bar. This publicly accessible open space will anchor the southern end of the Blue Greenway, providing pedestrian connections from the waterfront to the landside of the neighborhood via Delaware Street and 23rd Street.

STANDARDS

4.21.1 Bicycle Circulation

A bicycle connection shall be established between the southern end of the Blue Greenway and 23rd Street. Bicycle wayfinding and signage shall indicate these routes.

4.21.2 Pedestrian Circulation

A Pedestrian Throughway shall be established between the southern end of the Blue Greenway and 23rd Street, at the southern edge of the Stack Plaza, through the center of this open space, and along the southern edge of Unit 3. Pedestrian access to and around the base of the Stack shall be provided. Plaza design shall allow for multiple paths and vantage points from which to experience the scale and presence of the Stack. Pedestrian access between the Stack and Unit 3 shall be accommodated. Paved paths shall allow pedestrian access through garden spaces.

4.21.3 Planting •

Tree, shrub and groundcover planting shall adhere to the general standards and guidelines set forth in Sections 4.6 and 4.7. No more than one-third of the area within 45 feet of the Stack shall be planted.

4.21.4 Amenities

The following amenities shall be provided within Stack Plaza: seating, lighting, open plaza space, planted areas, bicycle parking, and waste receptacles. Movable outdoor seating and tables to serve a café or bar within the Stack may be provided.

4.21.5 Paving 🕒

Paving and hardscape elements shall incorporate industrial elements and materials into the design. Design elements should use simple geometric forms, regular or repeating paving patterns and utilitarian materials such as simple masonry pavers or salvaged masonry units if feasible and safe for public use. Surfaces should not be designed with elaborately applied patterns. Any patterns should be the pragmatic result of the use of unit pavers or concrete score joints.

GUIDELINES

4.21.6 Design Intent

The design intent of this open space is to provide an accessible, compelling civic space that highlights

the iconic Stack. The space around the Stack shall incorporate a balanced combination of paved plaza space and low planted areas. Plaza design should remain free of elements that visually compete with or detract from the singular presence of the Stack. Physical and conceptual connections between the Stack and Unit 3 should be reinforced through paving and pedestrian circulation design.

4.21.7 Planters and Planting

Stack Plaza design elements, such as planters and native planting, shall be kept low to the ground to complement and not distract from the Stack.

4.21.8 Furnishings

See Section 4.9 for general requirements and precedent images. Furnishing should complement and be integrated into the overall plaza design. Loose cafe tables and chairs are allowed.

4.21.9 Lighting

See Section 7 for general requirements. Lighting at the Point should balance safety with the need to keep light pollution to a minimum. Maintain minimum light levels for safety at primary amenity areas. Feature lighting for the Stack should be the focus of lighting design for this area. Artistic facade lighting and projected light displays are allowed.

4.21.10 Program

Stack Plaza should be primarily a civic space for passive recreation and socializing, with minimal fixed or temporary program elements. A bar or cafe within the Stack should be considered. Outdoor seating associated



Figure 4.21.1 Stack Plaza: View Looking West

with a bar or cafe is allowed. Stack Plaza should also be designed to accommodate temporary events, performances, and art exhibits.

4.21.11 Connection to Spreckels Warehouse

If the Sprecklels warehouse changes tenants and uses, the tree row should be modified and coordinated with a re-design of the driveway and truck loading area to create stronger visual and physical connections between Stack Plaza and the Spreckels warehouse.

CONSIDERATIONS

4.21.12 Planting

A row of trees should be planted along the southern edge of the site. Tree planting must adhere to the terms of the existing utility easement.

4.21.13 Stormwater Management

Stack Plaza should accommodate the need for stormwater management as an integrated design element. Consider integrating stormwater management gardens into site interpretation strategies that mark the transition from industrial infrastructure to green infrastructure. See Section 4.7 for general planting standards and guidelines for stormwater management areas. Refer to Figures 4.7.2 and 4.7.3 for examples of integrated stormwater management design and a suggested stormwater management plant palette.

Stack Plaza

STACK PLAZA

An Iconic Civic Space

- 1) The Stack
- 2 Paved Plaza
- (3) Gardens
- 4 Blue Greenway
- (5) Tree Row / Buffer
- (6) EVA Curb Access
- 7 Unit 3 Welcome Plaza, Passenger Drop-off and EVA Lane. (See Section 4.23)
- (8) Driveable Turf at EVA
- 9 Utility Easements
- (10) Seating Area
- (11) Paved Garden Path
- 12) The Point (See Section 4.20)
- (13) Primary Paved Path


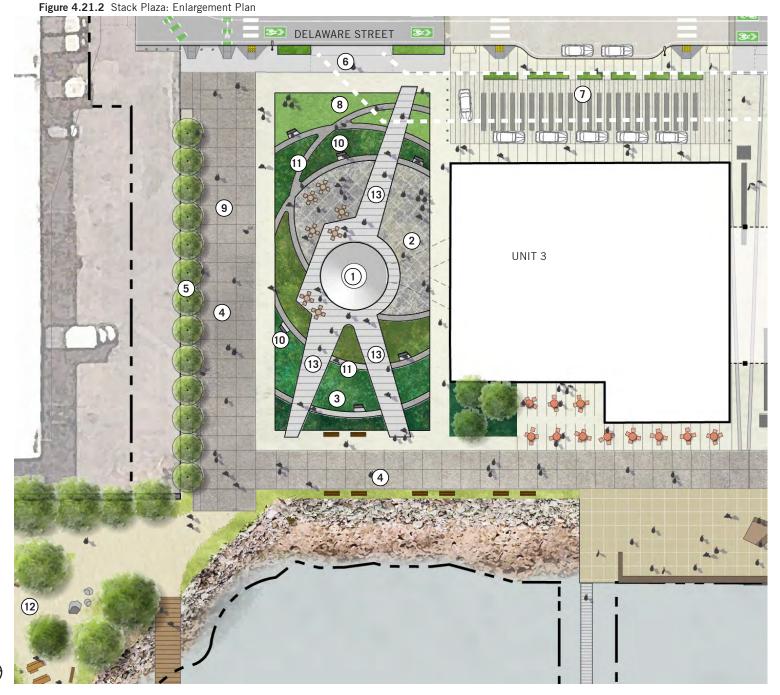


Figure 4.21.3 Stack Plaza: Section Looking North



MSL Mean Sea Level SLR Sea Level Rise

Figure 4.21.4 Precedent Images Illustrating Plaza Character and Potential Program

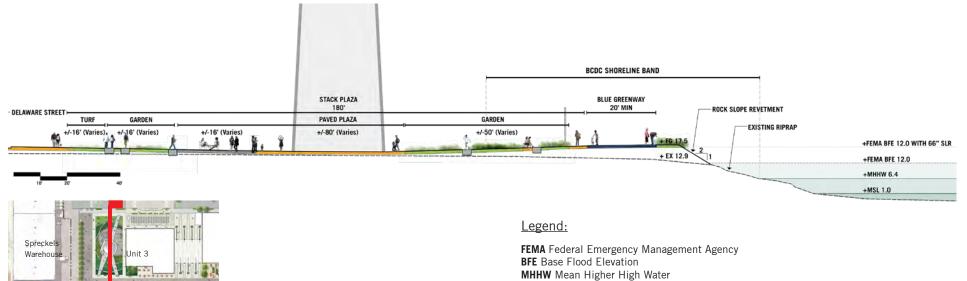

Post-industrial Site with Gardens and Contemporary Interventions



Post Industrial site as Civic Gathering Space



Plant-Based Stormwater Management Garden Integrated with Public Space Design

4.22 Turbine Plaza

Turbine Plaza serves multiple functions. Not only does it serve as the visual and physical corridor to the waterfront for Block 9, the plaza is a flexible open space that can host functions and provide the potential for permanent or rotating public art and/or interpretive exhibits. Turbine Plaza is located between Unit 3 and within Block 9 and may be partially covered, as permitted within Block 9 (Section 6.14). While the plaza will be publicly accessible at most times of the day and year, the planned hotel use of the adjacent buildings will help formulate the uses and programming of this plaza. Portions of the plaza may be closed on some days for private events and as required for the operation of the hotel. A project-serving separated sanitary sewer pump station pump house may be located within Turbine Plaza.

STANDARDS

4.22.1 Pedestrian Circulation

A Pedestrian Throughway shall be established and maintained between the Blue Greenway and Delaware Street through this plaza, with appropriate paving, furniture, and other amenities to encourage pedestrian use. During daytime/business hours, the plaza will allow public passage in the east-west direction.

4.22.2 Amenities

The following amenities shall be provided within Turbine Plaza: lighting, open flexible-use plaza space, planted areas, bicycle parking, waste receptacles, and power sources for temporary events and performances.

4.22.3 Access

The portion of the plaza between Unit 3 and the new portion of the building at Block 9 may be enclosed with architectural walls and a roof as further specified in

Section 6.13.2. This enclosed plaza should be publicly accessible at times when it is reasonable to expect substantial public use. This portion of the plaza may be closed to the public during non-business hours or as required for the operation of the hotel.

GUIDELINES

4.22.4 Design Intent

This plaza space shall be a primarily paved, open flexible-use space, protected from wind and weather and appropriate for temporary events and the display of public art and elements of an interpretive program, such as exhibits.

4.22.5 Pump House

The pump house should be carefully designed and well-integrated with the open space.

4.22.6 Paving

Plaza paving should be enhanced concrete with interesting score patterns, unit pavers, or a combination of concrete and unit pavers. Paving should be selected to complement the adjacent paved areas and the character of the adjacent buildings. Coordinate paving materials and design with the Unit 3 Passenger Loading Plaza to maintain a sense of continuity. If the plaza is partially covered, paving design should be unified through the interior and exterior areas.

4.22.7 Furnishings

See Section 4.9 for general requirements. Furnishing should complement and be integral to the plaza design. Along with fixed seating, moveable seating, such as cafe tables and chairs, is encouraged.

4.22.8 Lighting

See Section 7 for general requirements.

4.22.9 **Program**

This flexible-use plaza should be designed to accommodate temporary events, performances, and art exhibits.

CONSIDERATIONS

4.22.10 Pump House

If structurally feasible, the existing gatehouse structure may be moved and used to house the pump house.

4.22.11 Lighting

Feature lighting should highlight the salvaged overhead crane and other unique structures if they are retained. In-grade accent lighting may be used to highlight unique paving patterns. Public art should also be highlighted with feature lighting. Ample pedestrian lighting should be provided to ensure pedestrian comfort and safety.


4.22.12 **Program**

Permanent public art features are encouraged.



Figure 4.22.1 Turbine Plaza: View into Plaza from Bay Overlook

Figure 4.22.2 Turbine Plaza: Enlargement Plan

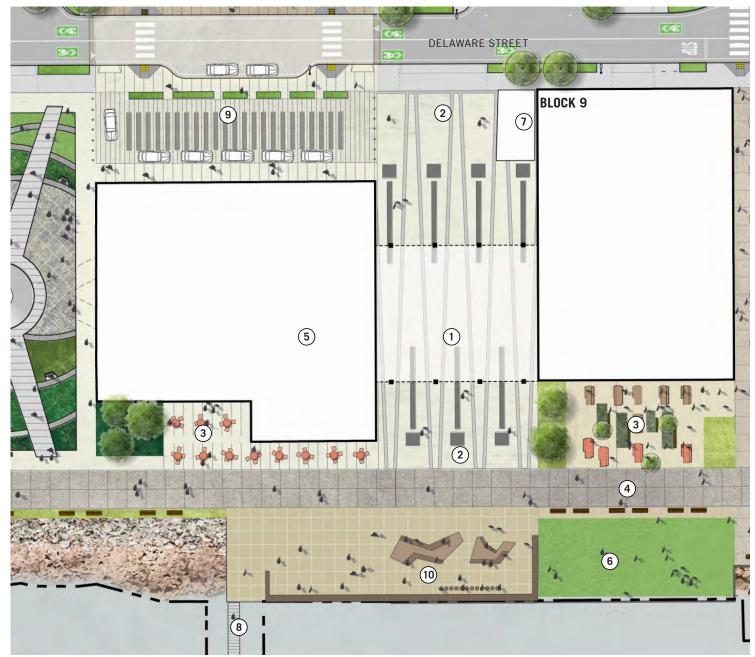

TURBINE PLAZA

Event and Flexible-Use Plaza

- 1 Area Allowed to be Covered
- (2) Exterior Public Plaza
- 3 Outdoor Food Service
- 4 Blue Greenway
- **5** Unit 3
- 6 Fitness Lawn/Flexible-Use Lawn
- 7 Potential Pump House Location
- 8 Recreational Dock
- 9 Unit 3 Welcome Plaza, Passenger Drop-off and EVA Lane. (See Section 4.23)
- (10) Bay Overlook Terrace at Turbine Plaza



Figure 4.22.3 Turbine Plaza: Precedent Images



Bold Paving In Keeping with Industrial Waterfront.



In Grade Lighting Reinforcing Bold Paving Pattern



Bold Paving Pattern



Public Art Plaza



Temporary Public Art Installation



Interactive Public Art Installation



Sheltered Public Space



Inside-Outside Openness and Permeability



Flexible-Use Covered Public Space



Event Space



Interior Art and Light Installation



Feature Architectural Lighting

4.23 Unit 3 Entry Plaza, Passenger Loading, and Emergency Vehicle Access

On the west side of Unit 3, a plaza space will allow for passenger drop-off and required emergency vehicle access to Unit 3. The design of this plaza should prioritize the pedestrian experience while allowing for the practical function of passenger drop-off.

STANDARDS

4.23.1 Passenger Loading and Drop-off

An area devoted to off-street passenger loading and emergency vehicle access shall be permitted within the Unit 3 Entry Plaza as shown in Figure 4.23.1. The width of the emergency vehicle access lane shall be 26-feet clear, with a seven foot wide passenger lane, a 10' passenger path and four foot zone of paving and planting, creating an entry plaza that is approximately 47 feet in width. See Figure 4.23.2 for a cross-section of the Unit 3 Entry Plaza.

The passenger loading and drop-off in the Unit 3 Entry Plaza shall be open for use by the public. Signage shall be installed indicating that the passenger loading area is available for public use and not exclusive to hotel patrons.

GUIDELINES

4.23.2 **Paving**

Plaza paving should be enhanced concrete with interesting score patterns, unit pavers, or a combination of concrete and unit pavers. Paving should be selected to complement the adjacent paved areas. Coordinate paving materials and design with Turbine Plaza and Stack Plaza to maintain a sense of continuity. While paving of the entire area should be unified in material selection, paving patterns, textures and variation should be used to distinguish pedestrian zones from vehicular ones.

Vehicular rated paving systems that incorporate planted cells within the paving should be considered for the EVA lane.

4.23.3 Planting

Planting should be incorporated in the plaza design where feasible and within the requirements of the EVA lane.

Figure 4.23.1 Unit 3 Passenger Loading and Fire Access: Enlargement Plan



UNIT 3 PLAZA UNIT 3 Figure 4.23.2 Unit 3 Passenger Loading and Fire Access Zone: Section Looking North Loading and fire access 1 Unit 3 and Public Passenger Loading (2) Plaza and Fire Access Lane FLEX PLAZA/ PASSENGER DROP-OFF PATH FIRE ACCESS LANE FLEX LAWN PLAZA DELAWARE STREET PARKING PATH 3 Curbside Passenger Loading (4) Blue Greenway (5) Curb Cut for Fire Access (6) Driveable Turf at EVA (7) Curb Cut for Passenger Dropoff

4.24 Humboldt Street Plaza

Humboldt Street Plaza is envisioned as an open and flexible space with the ability to accommodate open air markets, performances, public art, and elements of an interpretive program, such as exhibits. The plaza will provide a car-free, pedestrian connection between the terminus of Humboldt Street and the waterfront. Views of the Bay and the East Bay Hills will draw visitors from the surrounding neighborhood to the water.

STANDARDS

4.24.1 Pedestrian Circulation

Pedestrian Throughways shall be established and maintained between the Blue Greenway and Delaware Street through this plaza. The plaza will be open to the public.

4.24.2 Emergency Vehicle Access / Circulation

26-foot clear width emergency vehicle access (EVA) shall extend between Blocks 4 and 9 from Delaware Street to the eastern edge of the building faces at Blocks 4 and 9. Paving shall be designed to accommodate the structural loading of emergency vehicles.

4.24.3 Amenities

The following amenities shall be provided within Humboldt Street Plaza: seating, lighting, open flexible-use plaza space, planted areas, bicycle parking, waste receptacles, and power sources for temporary markets and performances.

4.24.4 **Program**

This flexible-use plaza should be designed to accommodate temporary events, performances, and art exhibits.

4.24.5 Food and Drink Kiosks and Mobile Carts

A limit of one mobile cart and one semi-permanent kiosk are allowed in Humboldt Street Plaza as permitted in Section 3.1. See Table 3.1.1 Publicly Oriented Accessory Retail Uses in Open Spaces.

4.24.6 Fire Access in Open Space

Fire access shall be provided within certain open space areas and may be provided in others. Open space fire access shall provide a minimum 26-foot wide clear path of travel. See Figure 5.8.1 for fire access locations within open space.

Fire access to Block 4 and Block 9 shall be provided in Humboldt Plaza for maximum length of 150-to-200 feet, measured from the curb-cut or vehicular access point into the plaza .

Fire access within Power Station Park West may be required if Block 7 is developed with more than one building. This access shall be a maximum length of 150-to-200 feet, measured from the curb-cut or vehicular access point into the open space.

If Unit 3 remains, fire access for the repurposed structure shall be provided between Delaware Street and Unit 3, See Figures 4.21.2, Stack Plaza, and 4.22.2, Turbine Plaza for additional information.

GUIDELINES

4.24.7 Design Intent

This plaza space shall be a primarily paved, open flexible-use space, appropriate for open air markets and temporary events.

4.24.8 **Paving**

Plaza paving should be enhanced concrete with interesting score patterns, unit pavers, or a combination of concrete and unit pavers. Paving should be selected to complement the adjacent paving of the Blue Greenway. Recommend variation in texture and color across the plaza width, which may serve to visually reduce the scale of paving needed for EVA.

4.24.9 Furnishings


See Section 4.9 for general requirements. Integrate fixed furnishing constructed of durable materials such as concrete, hardwoods, steel, and/or cast iron, in plaza design. Moveable seating, such as cafe tables and chairs, is encouraged.

4.24.10 Lighting

See Section 7 for general requirements. Lighting at Humboldt Street Plaza should balance safety with the need to keep light pollution to a minimum. Fixtures should reinforce the linear design of the plaza.



Figure 4.24.1 View Through Humboldt Street Plaza

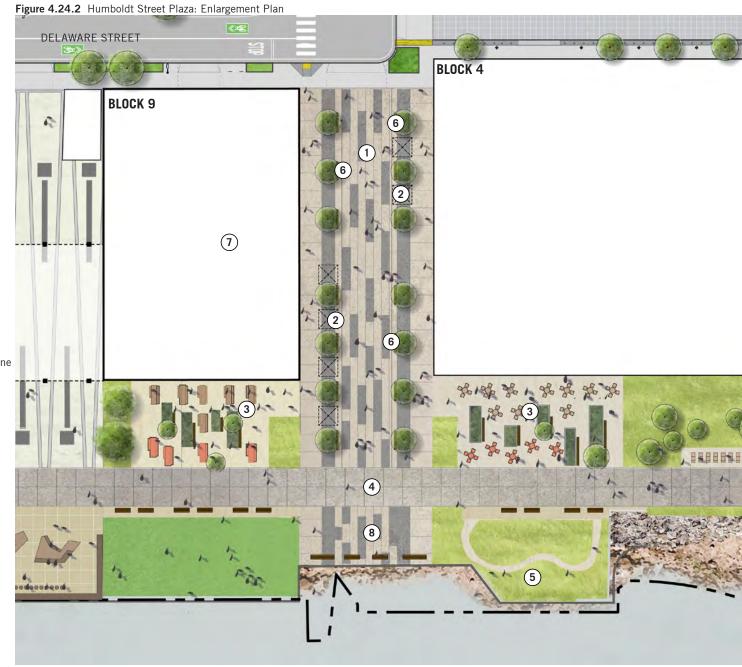

HUMBOLDT STREET PLAZA

Market and Event Plaza

- 1 Flexible Use Plaza and 26-foot EVA Lane
- Potential Market Stall/Event Tent Locations
- 3 Outdoor Food Service Area
- 4 Blue Greenway
- (5) Bay Shore Planting
- (6) Benches
- 7 Publicly Accessible Restroom
- 8 Bay Overlook Terrace at Humboldt Street Plaza



Humboldt Street Plaza

Figure 4.24.3 Humboldt Street Plaza: Section Looking West

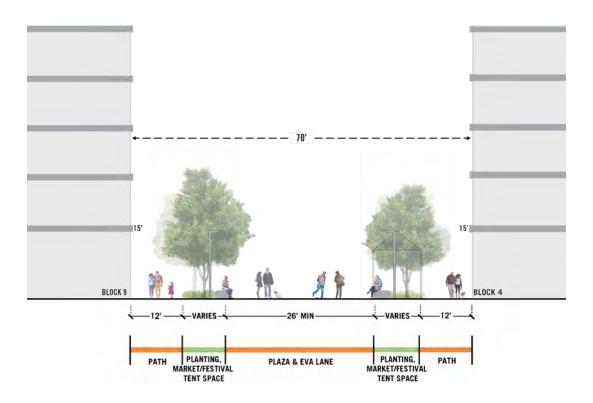




Figure 4.24.4 Humboldt Street Plaza: Precedent Images








Outdoor Performance



Outdoor Market

Figure 4.24.5 Block 9 to Waterfront: Section Looking North

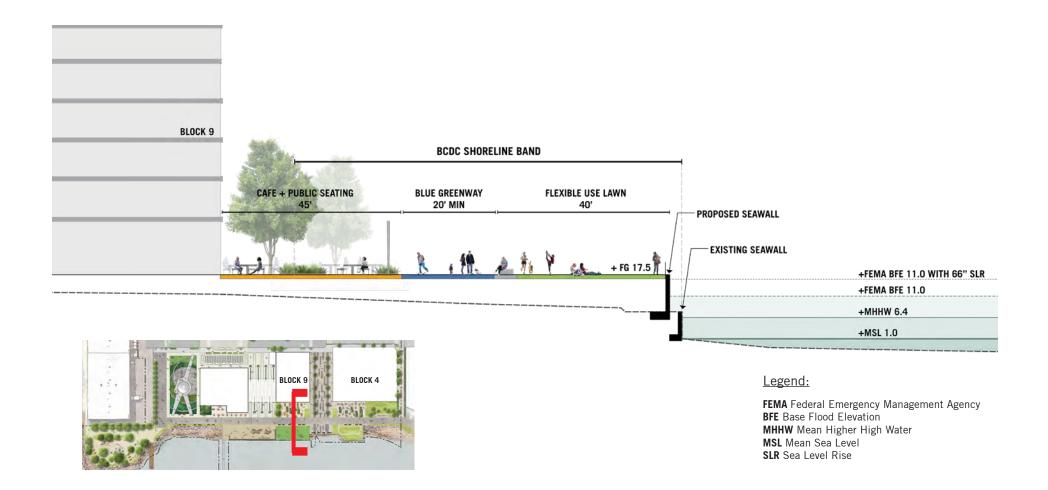

4.25 Power Station Park and Louisiana Paseo—Overview

Located in the heart of the development, Power Station Park and Louisiana Paseo will provide Dogpatch and other local neighborhoods a rich array of active and passive recreational opportunities. Power Station Park will include opportunities for fitness, active and passive recreation, and casual social experiences. The two blocks of Power Station Park will be distinct from one another in their programming and site elements, but will be linked by common features and materials. Louisiana Paseo will provide flexible use urban plaza spaces and car-free pedestrian areas connecting the neighborhood's retail and residential uses with the open space program.

All of these open spaces will be designed to allow for interaction with adjacent ground-floor uses of the adjacent buildings to create delightful, welcoming and public active places.

MARYLAND STREE BLOCK 6 **BLOCK 7 BLOCK 8** BLOCK 10 BLOCK 11 BLOCK 12

Figure 4.25.1 Power Station Park and Louisiana Paseo: Concept Plan Overview

POWER STATION PARK AND LOUISIANA PASEO

Concept plan overview

- 1 Power Station Park East
- 2 Power Station Park West
- 3 Louisiana Paseo

4.26 Power Station Park and Louisiana Paseo—Overview—Pedestrian Circulation


STANDARDS

4.26.1 Circulation - Power Station Park

Power Station Park shall establish Pedestrian Throughways in the east-west direction, creating a clear connection between the core of the neighborhood, the Stack and potentially Unit 3. The park's primary east-west pedestrian circulation will establish a clear, straightforward connection to Louisiana Street Paseo. In the north-south direction, an open and permeable design will allow free movement across the parks.

4.26.2 Circulation - Louisiana Paseo

Louisiana Paseo shall establish a Pedestrian Throughway in the north-south direction, creating a clear connection between Humboldt Street and 23rd Street. The Paseo shall also provide a Pedestrian Throughway leading to Georgia Lane to the east.

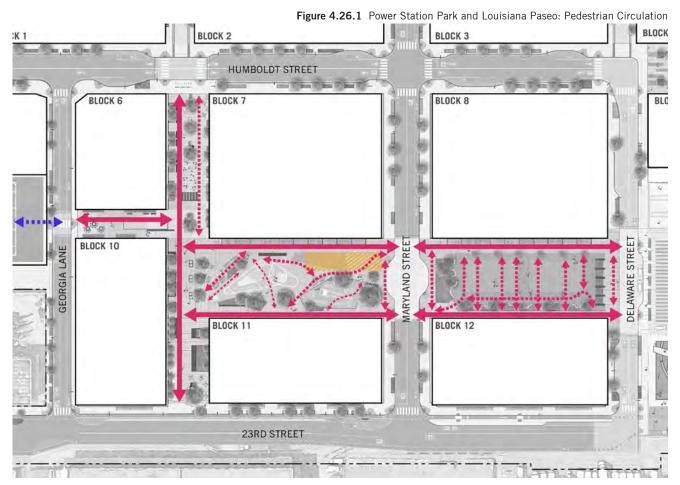

POWER STATION PARK AND LOUISIANA PASEO

Pedestrian Circulation

Primary Pedestrian - 10' W Min.
Secondary Pedestrian - 6' W Min.

Emergency Vehicle Access - 26' W

4.27 Power Station Park and Louisiana Paseo—Overview—Program

STANDARDS

4.27.1 **Program**

The open space composed of Power Station Park and Louisiana Paseo shall establish recreational amenities that will include accommodation for youth soccer, play and fitness activities for all ages, public seating areas, open flexible spaces, and stormwater treatment gardens. Design and programming of these spaces shall be established in coordination with anticipated or established ground floor uses of adjacent buildings. See Sections 4.28, 4.29, and 4.30 for more standards and guidelines for each open space.


4.27.2 Mobile Carts and Kiosk

Up to two mobile carts and one semi-permanent kiosk are allowed in Power Station Park as permitted in Section 3.1. (See Table 3.1.1 Publicly Oriented Accessory Retail Uses in Open Spaces).

CONSIDERATIONS

4.27.3 Thermal Energy Plant Piping Connection

The project sponsor may elect to construct shared thermal energy plants if determined feasible by the project sponsor. Such a system would use shared thermal energy plants within the project site to recover waste heat from commercial buildings for heating and cooling use in residential buildings to reduce the project's overall energy and water demands. If feasible, utilities related to this system including an insulated pipe connection shall be provided under the private portion of Power Station Park between Blocks 7 and 11 and Blocks 8 and 12.

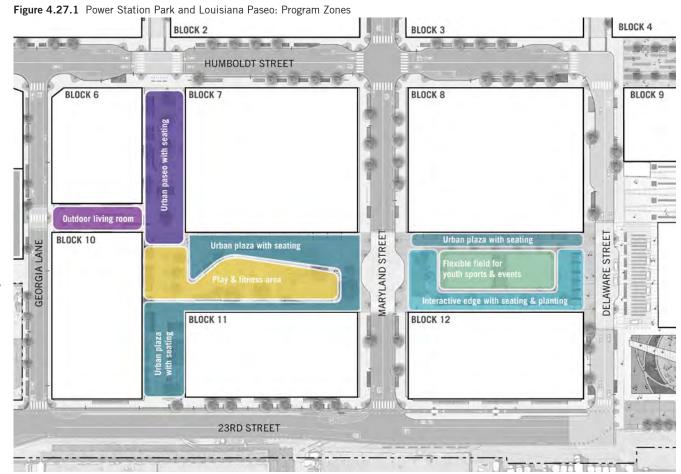

POWER STATION PARK AND LOUISIANA PASEO

Program Zones

4.28 Power Station Park East

Power Station Park East will feature a central flexibleuse lawn that can accommodate a variety of activities, including youth soccer, outdoor movies, community events, and casual lounging and play. Public seating on the north side of the park will take advantage of sun exposure, while an interesting, dynamic, interactive edge will help define the space and provide seating at the western and southern edges of the park.

STANDARDS

4.28.1 Flexible Field

Power Station Park shall feature an open, flexible-use field that can accommodate two under-6 youth soccer fields for simultaneous play.

4.28.2 Pedestrian Circulation

Pedestrian Throughways, minimum 10-foot wide, shall be established in the east-west direction along the northern and southern building frontages. This circulation pattern shall continue to Power Station Park West. Free movement in the north-south direction across the park, between buildings shall be allowed, with porous edges or edges with multiple points of entry between circulation paths and the central field.

4.28.3 Amenities

The following amenities shall be provided within Power Station Park East: seating, lighting, open flexible-use turf field, planted areas, stormwater gardens, bicycle parking, waste stations, drinking fountains, and power sources for outdoor movies and other community events.

4.28.4 **Program**

Power Station Park East shall be designed to accommodate temporary events, including outdoor movies and community events, performances, art exhibits, and two under-6 youth soccer fields.

GUIDELINES

4.28.5 Awnings and Architectural Canopies

To establish an intermediate scale between the park and adjacent buildings, consider a canopy structure or awning that may be freestanding or integrated with building architecture along the northern edge of Power Station Park at both East and West blocks.

4.28.6 Views to Unit 3 and Stack

Power Station Park design shall maintain open views of the Stack, and Unit 3 should it remain. The eastern end of Power Station Park shall be free of large trees and other vertical obstructions that interrupt these views.

4.28.7 Paving

Primary circulation paths at building faces should be paved with enhanced cast-in-place concrete, unit pavers, or a combination of enhanced concrete and unit pavers. Permeable unit pavers are allowed. Paving at primary circulation paths at both blocks of Power Station Park should be identical or similar in order to create uniformity across the two park blocks.

4.28.8 Lighting

See Section 7 for general requirements. Lighting should balance safety with the need to keep light pollution to a minimum. Fixtures should reinforce the linear design of the primary circulation paths on the north and south edges of the park.

CONSIDERATIONS

4.28.9 Park-edge Trees


To establish an intermediate scale between the park and adjacent buildings, a row of trees may be planted along the northern edge of the turf area instead of or in addition to a canopy structure or awning as long as the minimum 10-foot wide circulation path is maintained.

4.28.10 Interactive Edge

Power Station Park should feature an interactive edge that helps define the limits of the flexible-use field. This edge should integrate seating and planting.

4.28.11 **Lighting**

Low-level accent lighting may be used at the Interactive Edge.

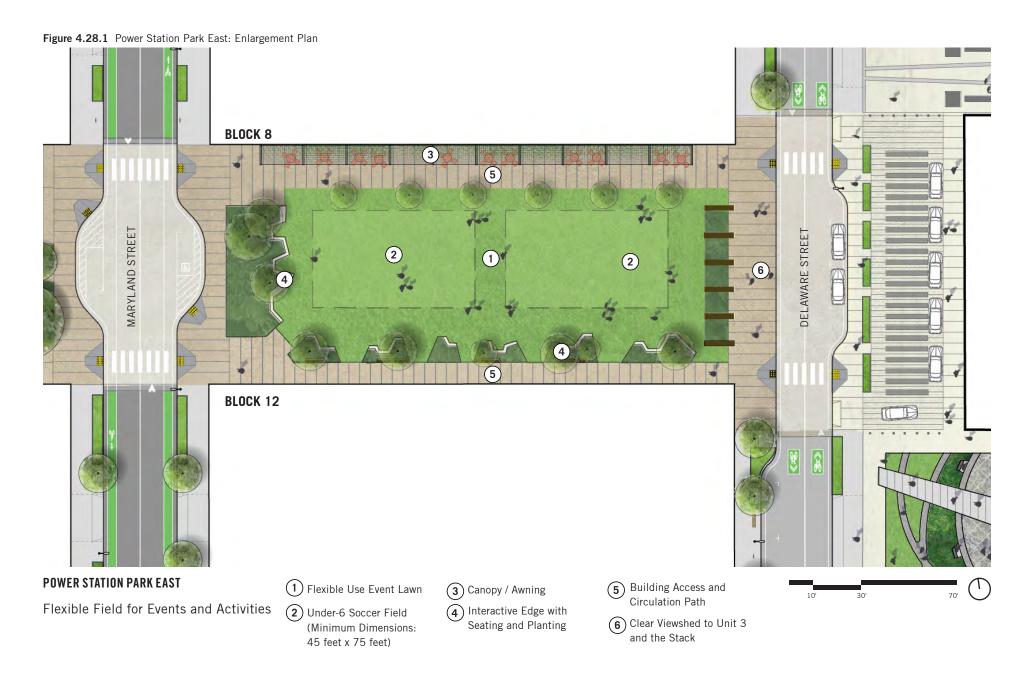


POTRERO POWER STATION Design for Development – DRAFT: October 3, 2018

Power Station Park East


Figure 4.28.2 Power Station Park East: View Toward Unit 3 Showing Flexible-Use Field and Seating



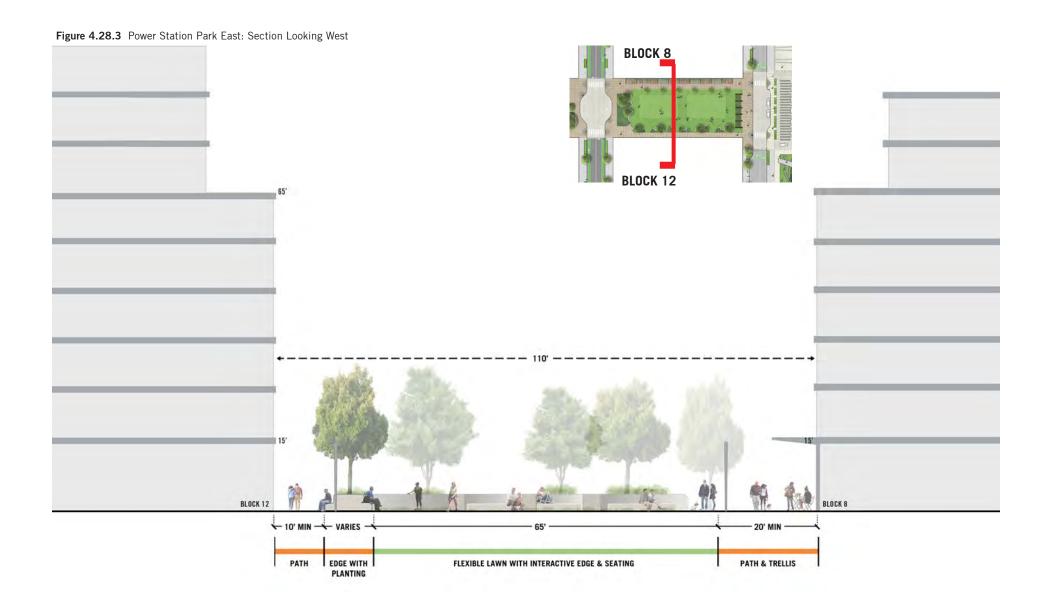

Power Station Park East

Figure 4.28.4 Power Station Park East: Event Capacity

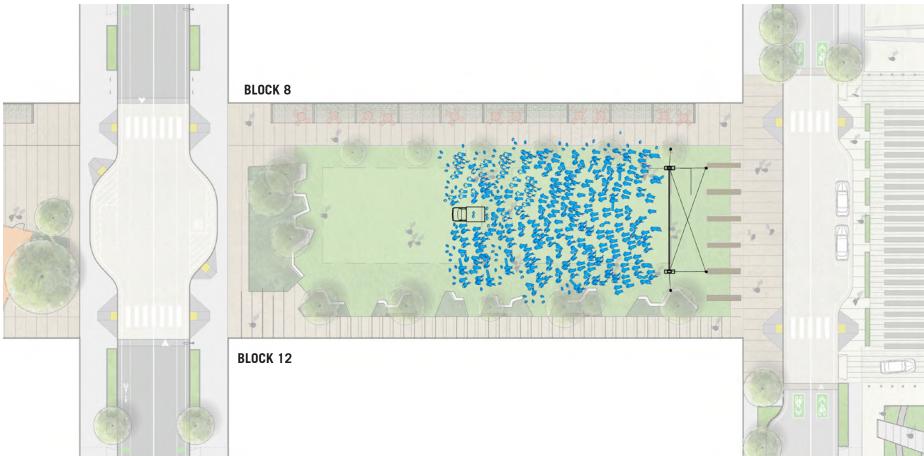

POWER STATION PARK EAST EVENT CAPACITY

Diagram showing a performance or movie night accommodating over 450 people.

Figure 4.28.5 Power Station Park East: Program Precedent Images



Fitness in the Park



Active Recreation



Picnic in the Park



Playful Interactive Park Edge



Outdoor Movie Night in the Park

4.29 Power Station Park West

Power Station Park West will feature a fitness and play plaza for all ages. Signature sculptural play features will distinguish this park, providing opportunities for active play and exercise. To the extent possible, play features should integrate uses for all ages and not segregate people by age groups.

The park will be designed to be interactive with the ground floors of adjacent buildings. The park design should enhance building programming, including community uses such as day care, indoor fitness rooms, or other community spaces. Public seating on the north side of the park will take advantage of sun exposure. Primary circulation paths at the north and south edges of the park will provide pedestrian paths and connect the West and East blocks of the park with similar paving and path widths. An architectural canopy structure at the north edge will help provide an intermediate scale between the park and the buildings.

STANDARDS

4.29.1 Sculptural Play Features

Power Station Park West shall feature sculptural play features appropriate for play and fitness for all ages. A special zone with play features may be designated for use during day care operation hours, generally between the hours of 7 a.m. and 6 p.m., Monday through Friday, by an adjacent day care center.

4.29.2 Pedestrian Circulation

A Pedestrian Throughway, having a minimum width of 10 feet, shall be established in the east-west direction along the building faces to the north and south. Free movement in the north-south direction across the park,

between buildings shall be allowed, with porous edges or edges with multiple points of entry between circulation paths and the central play plaza.

4.29.3 Amenities

The following amenities shall be provided within Power Station Park West: play features, seating, lighting, planted areas, stormwater gardens, bicycle parking, drinking fountains, and waste stations.

4.29.4 Fire Access in Open Space

Fire access shall be provided within certain open space areas and may be provided in others. Open space fire access shall provide a minimum 26-foot wide clear path of travel. See Figure 5.8.1 for fire access locations within open space.

Fire access to Block 4 and Block 9 shall be provided in Humboldt Plaza for maximum length of 150-to-200 feet, measured from the curb-cut or vehicular access point into the plaza .

Fire access within Power Station Park West may be required if Block 7 is developed with more than one building. This access shall be a maximum length of 150-to-200 feet, measured from the curb-cut or vehicular access point into the open space.

If Unit 3 remains, fire access for the repurposed structure shall be provided between Delaware Street and Unit 3, See Figures 4.21.2, Stack Plaza, and 4.22.2, Turbine Plaza for additional information.

GUIDELINES

4.29.5 Awnings and Architectural Canopies

To establish an intermediate scale between the park and adjacent buildings, consider a canopy structure or awning that may be freestanding or integrated with building architecture along the northern edge of Power Station Park at both Fast and West blocks.

4.29.6 Paving

Primary circulation paths at building faces should be paved with enhanced cast-in-place concrete, unit pavers, or a combination of enhanced concrete and unit pavers. Paving at primary circulation paths at both blocks of Power Station Park should be identical or similar in order to create uniformity across the two park blocks.

4.29.7 Lighting

See Section 7 for general requirements. Lighting should balance safety with the need to keep light pollution to a minimum.

4.29.8 Sculptural Play Features


Play features should be integrated into a cohesive urban plaza design. To the extent feasible, play features should not segregate age groups from one another. To avoid fixed barriers and fences, it is recommended that potential designated day care center activities use temporary moveable barriers/fences during use.

CONSIDERATIONS

4.29.9 Park-edge Trees

To establish an intermediate scale between the park and adjacent buildings, a row of trees may be planted

Figure 4.29.1 Power Station Park West: Enlargement Plan

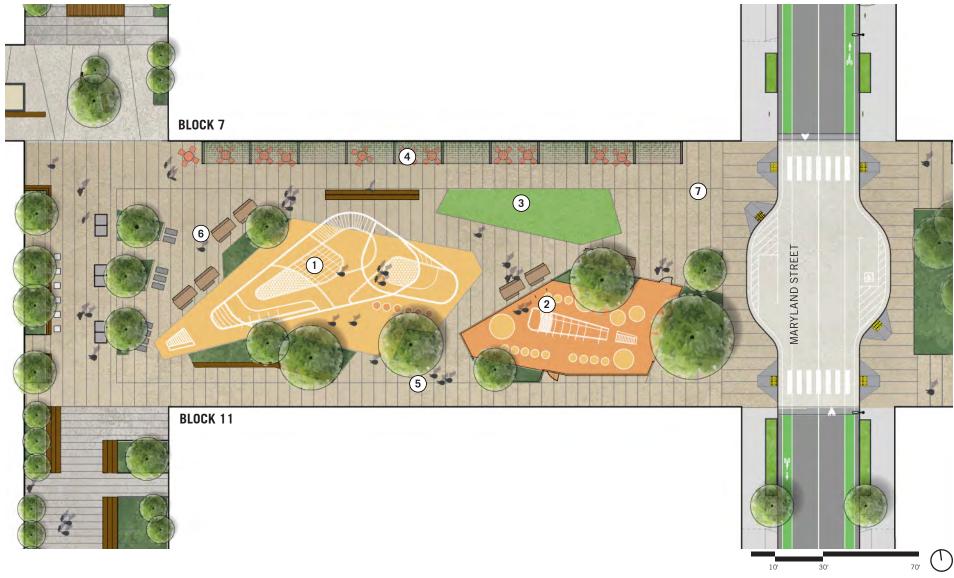

POWER STATION PARK WEST

A Playful Neighborhood Plaza for All Ages

- 1 Interactive Sculptural Play Element - All Ages
- 2 Play Area Potential Day Care Center Outdoor Use
- 3 Drivable Turf/Artificial Turf at Potential EVA Lane
- 4 Outdoor Seating With Canopy / Awning
- **5** Building Access and Circulation Path
- 7 Potential EVA Lane 26 Feet Wide
- 6 Public Tables and Seating

Power Station Park West

Figure 4.29.2 Power Station Park West: Precedent Images











Canopy Structure



Playful Elements for All Ages



Adult Fitness Amenities



Game Tables



Game Tables

along the northern edge of the turf area instead of or in addition to a canopy structure or awning as long as the minimum 10-foot wide circulation path is maintained.

4.29.10 Furnishings

See Section 4.9 for general requirements. Furnishing should complement and be integrated into the overall park design. Moveable seating, such as cafe tables and

chairs is encouraged along the northern building face. Public picnic tables or fixed cafe tables for public use are recommended.


4.29.11 **Lighting**

Fixtures should reinforce the linear design of the primary circulation paths on the north and south edges of the park. Accent lighting at park features such as

seating and play elements may be used to provide lighting variety.

4.29.12 Sculptural Play Features

Play features should be artful, original structures that give Power Station Park West a clear identity.

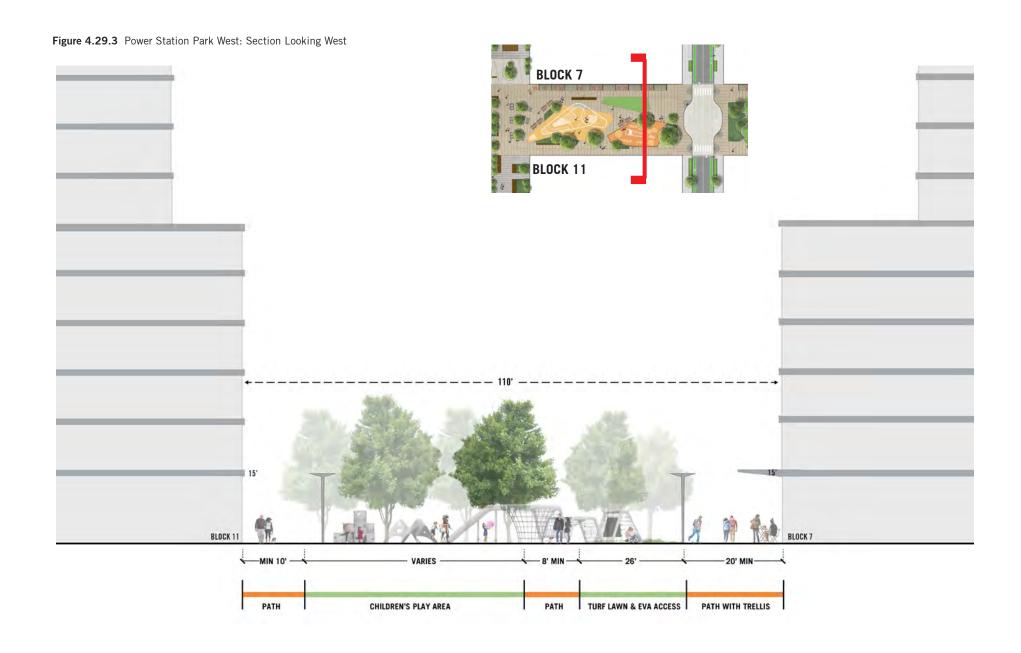

4.30 Louisiana Paseo

Louisiana Paseo, while providing continuous pedestrian passage from block to block, will be made up of several distinct spaces. The south end of the paseo, at 23rd Street, will incorporate an open paved plaza space that can accommodate food trucks or small neighborhood events. The plaza should complement the commercial and light industrial uses in the adjacent buildings at Blocks 10 and 11. At the west end of Power Station Park, the paseo will incorporate seating and may include game tables such as table tennis or chess. At the north end of the Paseo, between Power Station Park and Humboldt Street, the paseo will be a pedestrian passage with seating that complements the adjacent residential uses of Blocks 6 and 7. The leg of the paseo between Blocks 6 and 10 will be a public outdoor living room with seating and an overhead canopy spanning between Blocks 6 and 10. The various spaces of Louisiana Paseo also provide opportunities for public art and elements of an interpretive program, such as interpretive exhibits.

STANDARDS

4.30.1 Awnings and Architectural Canopies

Between Blocks 6 and 10 there shall be a highly transparent overhead canopy structure that spans between the two buildings. This canopy shall be designed to provide comfort from wind between the two buildings.

4.30.2 Pedestrian Circulation

Pedestrian Throughways, having a minimum width of 10 feet, shall be established in the north-south and east-west directions through the paseo.

4.30.3 Amenities

The following amenities shall be provided within Louisiana Paseo: seating, lighting, planted areas, stormwater gardens, bicycle parking, waste stations, and power sources for events.

4.30.4 Food and Drink Kiosks and Mobile Carts

A limit of one mobile cart and one semi-permanent kiosk are allowed in Louisiana Paseo as permitted in Section 3.1. (See Table 3.1.1 Publicly Oriented Accessory Retail Uses in Open Spaces).

GUIDELINES

4.30.5 **Paving**

Primary circulation paths and plaza spaces should be paved with enhanced cast-in-place concrete, unit pavers, or a combination of enhanced concrete and unit pavers.

4.30.6 Furnishings

See Section 4.9 for general requirements.

4.30.7 Lighting

See Section 7 for general requirements. Lighting should balance safety with the need to keep light pollution to a minimum.

4.30.8 Program and Design

Louisiana Paseo should be designed to accommodate temporary events, performances, and art exhibits. While unifying design elements such as paving, lighting fixtures, and furnishing should provide a legible identity for the entire paseo, the individual spaces at 23rd street, at Power Station Park, at Humboldt Street, and between Blocks 6 and 10 should incorporate design elements and programming that are distinct from one another.

CONSIDERATIONS

4.30.9 Lighting

Primary fixtures should reinforce the linear design of the primary circulation paths. Secondary accent lighting may be used to highlight furnishing, paving or other site elements.

LOUISIANA PASEO

Outdoor Living Room, Spaces for Play, and A Pedestrian Paseo

- 1 Play Plaza: Play Tables And Seating
- 2 Flexible Use Plaza For Events, Food Trucks, Block Parties
- 3 Outdoor Living Room/Urban Lounge
- 4 Architectural Canopy for Wind Protection
- 5 Seating/Performance Platform
- 6 Pedestrian Paseo and Seating
- 7 Rooftop Sports Field (See Section 4.31)
- 8 Rolled Curb
- (9) Seating area and/or Bocce Court





BLOCK 6

BLOCK 7

Figure 4.30.1 Louisiana Paseo: Enlargement Plan

BLOCK 5

HUMBOLDT STREET

Figure 4.30.2 Louisiana Paseo South: Section Looking North


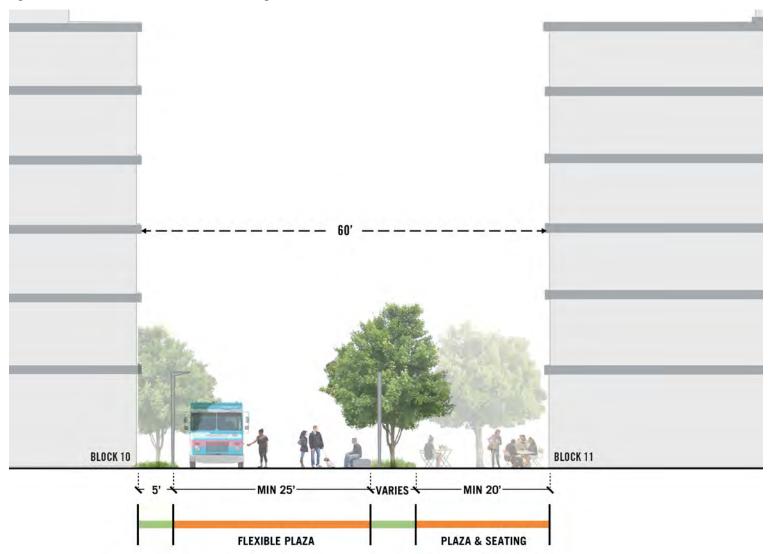




Figure 4.30.3 Louisiana Paseo North: Section Looking North



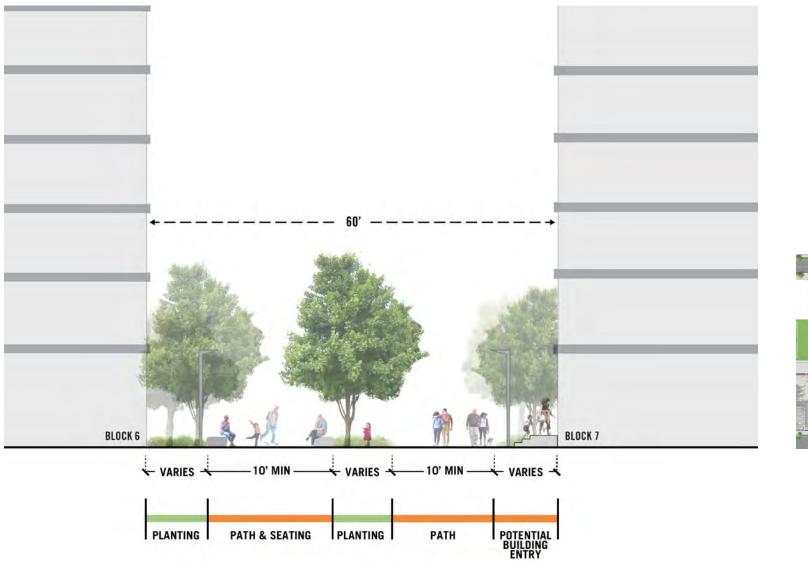

4.31 Rooftop Soccer Field

The Power Station proposes to utilize a portion of Block 5's rooftop for a publicly accessible under-10 multipurpose field made of high-quality artificial field turf. The facility is sized to accommodate casual adult-league play, youth development, and club training on one large under-10 field or three smaller under-6 fields. A field reservation system will be available for users to reserve the space.

STANDARDS

4.31.1 Access

Use of the rooftop field shall be open to the public. An access route from street level shall be provided with elevator and stair access and legible wayfinding.

4.31.2 Furnishing

Provide bench seating at field level for players and spectators.

4.31.3 Amenities

The following amenities shall be provided at the rooftop field: seating, lighting, and waste stations. A restroom serving the rooftop field will be provided within the same building as the field but may be located on the ground floor.

4.31.4 Field Enclosure

Up to a 20-foot wind screen and protective netting shall be provided.

4.31.5 Field Dimensions

Field will be an under-10 field measuring 105 feet x 180 feet with 10-foot clearance on south, east, and north edges of the field. The field can be split in three under-6 fields measuring 60 feet x 105 feet. A clearance of 26 feet will be provided on the western edge of the field.

4.31.6 Turf

Artificial turf is required.

4.31.7 Permitted Activities

Other active recreation activities are permitted on the rooftop field.

GUIDELINES

4.31.8 Lighting

See Section 7 for general requirements. Lighting should balance safety and functionality of the sports field with the need to keep light pollution to a minimum.



Figure 4.31.1 Rooftop Soccer Field: Precedent Image

Figure 4.31.2 Rooftop Soccer Field: Enlargement Plan



ROOFTOP SOCCER FIELD

Publicly accessible sports facility

- 1 Under-10 sized soccer field (105 feet x 180 feet)
- 2 Warm-up area
- (3) Benches



4.32 Block 9 Building and Open Space Configuration Without Unit 3

If Unit 3 is not retained, the open space and building footprint at Block 9 will be reconfigured (see Sections 6.11 and 6.13). In this configuration, the southern portion of the new Block 9 building will provide a visual terminus from Power Station Park as one looks east. The longer, narrower building footprint allows for a more generous open space between the building and the Blue Greenway. In this configuration, a unified plaza design extends from Humboldt Street Plaza to Stack Plaza, creating a grand civic space on the waterfront. While the general program and function of Humboldt Street Plaza and Stack Plaza do not change relative to the preferred configuration that preserves Unit 3, a singular paving and site design concept links the two plazas together through the wider Block 9 open space. East of Block 9, a flexible use events and arts plaza (Block 9 Plaza) may accommodate permanent and rotating art and interpretive exhibits, while allowing for everyday public seating and gathering.

STANDARDS

4.32.1 Design Intent

The open space surrounding Block 9, extending from the south edge of Block 4 to the south edge of Stack Plaza, shall be characterized by a seamless design that reads and functions as one integrated space. This plaza shall be an open, flexible-use space, appropriate for temporary events, public art, and the display of interpretive exhibits. The design shall include a balance of paving and green space while also including stormwater management gardens as needed. As the signature open space on the site, the design shall be of the highest caliber.

4.32.2 Pedestrian Circulation

A pedestrian throughway shall be allowed in the northsouth direction within the plaza east of Block 9 and west of the Blue Greenway.

4.32.3 Amenities

The following amenities shall be provided within the Block 9 Plaza: lighting, seating, open flexible-use plaza space, planted areas, bicycle parking, waste receptacles, and power sources for temporary events and performances.

4.32.4 Furnishings

See Section 4.9 for general requirements. Integrate public, fixed furnishings constructed of durable materials such as concrete, hardwoods, steel, and/or cast iron. Moveable seating, such as cafe tables and chairs, is allowed. Tiered seating, such as bleacher- style seating or seating that allows a higher vantage point for views toward the bay is also allowed.

4.32.5 Public Access

Block 9 Plaza shall remain open and accessible to the public, with the exception of outdoor food service areas along the eastern building frontage (see Section 4.19).

4.32.6 Food and Drink Kiosks and Mobile Carts

A limit of one mobile cart and one semi-permanent kiosk are allowed in Block 9 Plaza, as permitted in Section 3 (See Table 3.1.1 Publicly Oriented Accessory Retail Uses in Open Spaces).

GUIDELINES

4.32.7 **Paving**

Plaza paving should be enhanced cast-in-place concrete with interesting score patterns, unit pavers (stone, concrete, or asphalt units), or a combination of cast-in-place concrete and unit pavers.

4.32.8 Lighting

See Section 7 for general requirements. Lighting in this plaza should balance safety with the need to keep light pollution to a minimum, especially at the water's edge. Feature lighting should highlight architectural facades and other unique structures.

4.32.9 **Program**

This flexible-use plaza should be designed to accommodate temporary events, performances, and art exhibits. Permanent public art features are allowed.

CONSIDERATIONS

4.32.10 **Lighting**

In-grade lighting that accents the linearity of the plaza is also encouraged. Consider mast lighting in plaza spaces to reinforce the large civic space while reducing the number of fixtures and allowing for focused and safe light levels. Public art should also be highlighted with feature lighting.



BLOCK 9 ALTERNATIVE CONFIGURATION WITH STACK PLAZA AND HUMBOLDT STREET PLAZA

Potential Scenario in which Unit 3 is Not Retained


- 1 Block 9 Plaza: Multi-Use Event and Art Plaza
- (2) Stack Plaza
- (3) Humboldt Street Plaza
- 4 Tiered Seating Feature
- (5) Public Seating
- (6) Planting

OPEN SPACE

[This page intentionally left blank.]

Section 5 STREETS

Streets						Street Character		
5.1	Street Overview	144	5.10	Universal Passenger Loading Zones and		5.17	23rd Street	188
5.2	Pedestrian Network	146		Accessible Parking Stalls	166	5.18	Maryland Street	198
5.3	Bicycle Network	150	5.11	Urban Forest	170	5.19	Humboldt Street	204
5.4	On-Street Class II Bicycle Parking	154	5.12	Street Trees	174	5.20	Georgia Street	210
5.5	Transit Network	156	5.13	Streetscape Planting	176	5.21	Georgia Lane	212
5.6	Shuttle Network	158	5.14	Stormwater Management	178	5.22	Delaware Street	216
5.7	Vehicular Network	160	5.15	Furnishing	180	5.23	Louisiana Street	222
5.8	Emergency Vehicle Access	162	5.16	Paving and Materials	182	5.24	Craig Lane	224
5.9	Curb Management	164				5.25	22nd Street	228
						5.26	Illinois Street	229

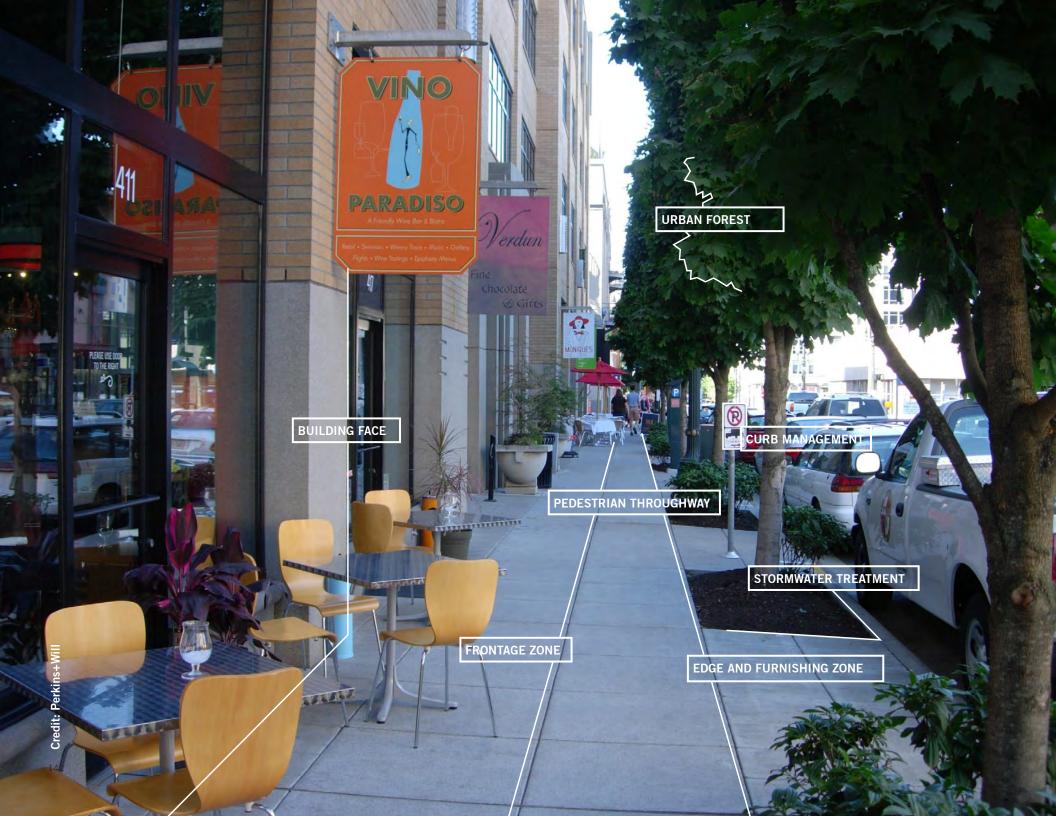

Streets

The quality of a neighborhood's public life is largely defined by what happens in its streets.

The Streets section implements the "Complete Streets" concept described in the Vision and provides detailed controls for the site's array of streetscapes. This section begins with an overview of street types and moves on to describe the pedestrian, bicycle, transit, shuttle, and vehicular networks that create the site's transportation system. The Power Station will include several complementary street typologies that create a variety of different experiences for residents, workers, and visitors. These varied street types facilitate different uses and speeds of movement, from an afternoon stroll to a morning bicycle ride to work.

Streets at the Power Station will be pedestrian- and bicycle-friendly, with generous sidewalks and narrow vehicular travel lanes designed to facilitate slower vehicle speeds and prioritize safe pedestrian travel.

Public transit will be seamlessly accommodated into the design, and optimally located to facilitate and encourage transit use. Street types and designs conform to the *San Francisco Better Streets Plan (2010)*, enhancing the public realm with a robust network of complete-street typologies. Proposed street designs included in this section have been carefully reviewed by San Francisco Department of Public Works (SFDPW), San Francisco Fire Department (SFFD), San Francisco Municipal Transportation Authority (SFMTA), and San Francisco Public Utilities Commission (SFPUC), and found to be compatible with 2015 SFDPW Subdivision Regulations and other regulations that sometimes conflict with the *Better Streets Plan*.

5.1 Street Overview

The *Better Streets Plan* seeks to balance the needs of all users with an understanding that, because they serve a multitude of social, recreational, and ecological roles, streets themselves are an integral component of the public realm and city fabric.

In accordance with the Better Streets Plan, streets at the Power Station will connect to the surrounding neighborhood with well-designed sidewalks. They have been designed with a unified palette of pedestrianoriented streetscape materials that follow universal design principles and satisfy SFDPW accessibility requirements. To support adjacent business and community-serving public spaces, space for retail spill-out and moments of casual interaction have been provided. Curb space has been designed to accommodate as much loading and servicing needs as possible, in effort to reduce vehicular and pedestrian conflicts by limiting the number of driveways provided within the project. A generous canopy of trees and integrated stormwater treatment areas contributes to a verdant. attractive, and ecologically sustainable streetscape.

Consistent with the *Better Streets Plan*, the site will include the following street types:

 Neighborhood Commercial Streets are those where San Franciscans do their daily errands, meet with friends, and shop and play on weekends. Accordingly, they must accommodate a variety of needs, including ample foot traffic as well as short-term parking for customers and loading space requirements for merchants.
 Neighborhood commercial streets include Humboldt Street, Maryland Street, Georgia Street, the portion of Delaware Street south of Humboldt.

- Mixed-Use Streets serve a variety of low-intensity industrial uses in addition to residences, shops and services. Mixed-use streets are often wide streets, with higher volumes of faster moving traffic. Their use and character are in a state of constant change. 23rd Street will be a mixed-use street.
- Alleys are small-scale streets that typically only carry low numbers of vehicles accessing adjacent properties.
 Alleys will include Georgia Lane, Louisiana Street, and the portion of Delaware north of Humboldt. Craig Lane will be a one-way service alley with raised curbs and conventional sidewalks.
- Shared Streets are alleys without curbs, or with minimized curbs no greater than four inches in height.
 Louisiana Street and the portion of Delaware Street north of Humboldt may be shared streets.

Refer to Figure 5.1.1 for Power Station street types.

STANDARDS

5.1.1 Requirements

Streets shall be designed for SU-30 Single Unit trucks and to accommodate WB-40 Intermediate Semitrailers (meaning that WB-40 trucks may need to use adjacent travel lanes in order to turn). Streets shall adhere to the standards and guidelines contained within this section. For specific requirements for each street, see Street Character Sections 5.17 through 5.26.


5.1.2 Public Rights-of-Way

Public streets at the Power Station must comply with Department of Public Works (SFDPW) standards, and be open to the sky and publicly accessible, subject to reasonable maintenance, operations, repair, and emergency access rights. Please see Figure 5.14.1 for public rights-of-way planned for the Power Station.

5.1.3 Signage and Markings

All intersections shall comply with City of San Francisco standards for signage and street markings.

Figure 5.1.1 Street Types

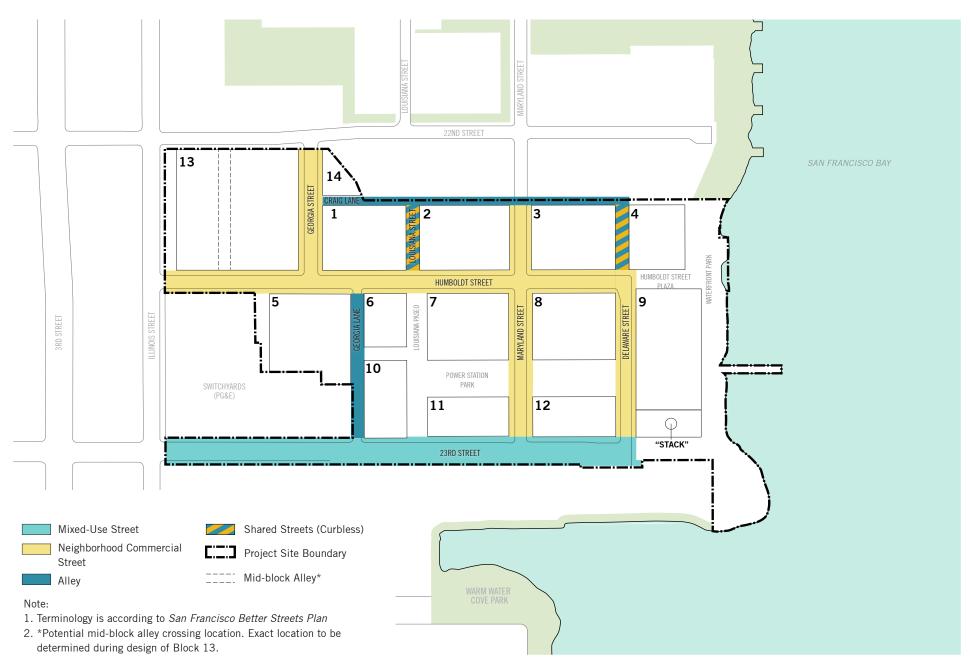

5.2 Pedestrian Network

Sidewalks within public rights-of-way and throughways within open spaces at the Power Station have been designed to prioritize the safety and convenience of pedestrians with highly visible crossings, curb extensions that minimize crossing distances, and ample sidewalk space.


Sidewalks—the area between the curb and the property line—balance pedestrian travel with landscaping, furnishings, lighting and other elements such as signage and fire hydrants. The following zones, consistent with the *Better Streets Plan*, help organize the aforementioned elements.

Edge Zone. This area is used for the loading and unloading of people and goods. The edge zone shall be 24 inches in width (measured from the curb or street-edge) and located where there is adjacent parking or loading activities.

Furnishing Zone. This portion of the sidewalk is used for street trees, landscaping, transit stops, street lighting, furniture (such as benches), trash receptacles, bicycle racks, and other amenities. The width of the furnishing zone ranges from three to five feet, but can be wider as needed.

Throughway Zone. This zone is used for pedestrian travel. The Throughway zone, also called the Pedestrian Throughway, varies in width, but is in no event less than four feet wide.

Frontage Zone. This area, adjacent to the building, provides a transition from the activity inside the building to that of the street.

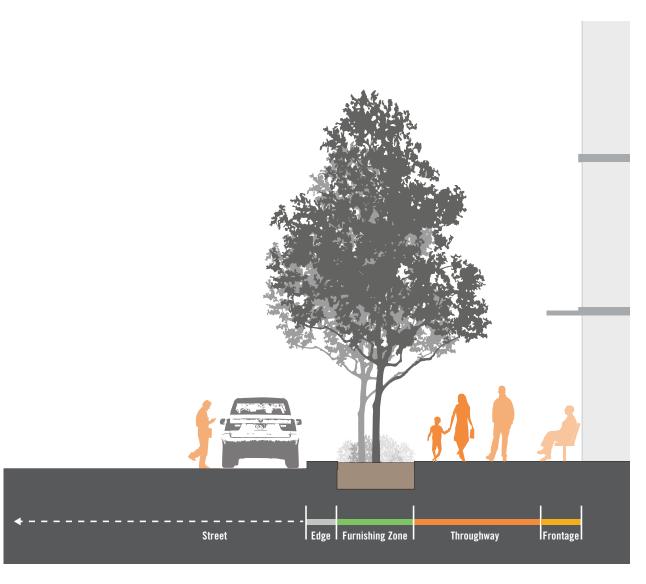

STREETS







Edge Zone



Throughway Zone



Frontage Zone

STANDARDS

5.2.1 Pedestrian Throughway

The Pedestrian Throughway shall be an accessible path of travel.

A) On all street types, except for alleys and shared public ways, a minimum six-foot-wide Pedestrian Throughway shall be provided.

B) On alleys and shared streets, a minimum four-foot-wide Pedestrian Throughway shall be provided, with six-foot-wide paths of travel maintained where feasible. See Street Character sections (5.17 through 5.26) for streetscape details.

5.2.2 Raised Pedestrian Crossings

Raised pedestrian crossings shall be provided in the following locations:

- Where Power Station Park crosses Maryland and Delaware streets;
- At the intersection of Humboldt and Louisiana streets; and
- At the mid-block crossing on Georgia Lane.

The surface, elevation, and design of raised pedestrian crossings shall comply with SFDPW and SFPUC standards.

At raised crossings, Pedestrian Throughways across the intersection shall be indicated with crosswalks.

5.2.3 Shared Streets

Shared streets shall apply a continuous single surface treatment across the width of the right-of-way (ROW), with either no curbs or a maximum curb height of four inches. The goal of designating a shared public way is to calm traffic and create a safe environment that encourages public activity. Louisiana Street and the portion of Delaware Street north of Humboldt Street may be shared public ways, as shown in Figure 5.2.1. Additional detail is given in the D4D sections regarding the streetscape of Delaware Street (Section 5.21) and Louisiana Street (Section 5.22).

5.2.4 Crosswalks

Crosswalk treatments shall comply with City requirements and with SFDPW standards. Surfacing of crosswalks shall meet ADA standards.

GUIDELINES

5.2.5 Bulb-outs

Bulb-outs shall be used to decrease pedestrian crossing distances and to create additional space for pedestrians, public seating and furnishing. The width of bulb-out will be maximized to the extent reasonable based on vehicle turning movements and required utility separation to curb.

Figure 5.2.1 Pedestrian Network



5.3 Bicycle Network

The Power Station's internal bicycle network is designed to connect cyclists safely and efficiently to destinations within and adjacent to the site (See Figure 5.3.1). Ranging from shared-roadway markings (sharrows) to protected bicycle lanes, all public streets at the Power Station will include bicycle facilities.

Bicycle Lane Classifications

Class I bikeways, also known as bicycle paths or shared-use paths, are facilities with exclusive right-of-way for bicyclists and pedestrians, situated away from the roadway, and with cross-flows by motor traffic minimized. Some systems provide separate pedestrian facilities. Class I facilities support both recreational and commuting opportunities. Class I facilities are commonly applied along rivers, shorelines, canals, utility rights-of-way, and railroad rights-of-way; within school campuses; and within and between parks.

Class II bikeways are bicycle lanes established along streets and defined by pavement striping and signage that delineates a portion of a roadway for bicycle travel. Bicycle lanes are one-way facilities, typically striped adjacent to motor traffic travelling in the same direction. Contraflow bicycle lanes can be provided on one-way streets for bicyclists travelling in the opposite direction.

Class III bikeways, or bicycle routes, designate a preferred route for bicyclists on streets shared with motor traffic and not served by dedicated bikeways, in order to provide continuity to the bikeway network. Bicycle routes are generally not appropriate for roadways with higher motor traffic speeds or volumes. Bicycle routes are established by placing bicycle-route signs and optional sharrows along roadways.

A Class IV separated bikeway, often referred to as a cycle track or protected bicycle lane, is for the exclusive use of bicycles, physically separated from motor traffic with a vertical feature. The separation may include, but is not limited to, grade separation, flexible posts, inflexible barriers, or on-street parking. Separated bikeways can provide for one-way or two-way travel. By providing physical separation from motor traffic, Class IV bikeways can reduce the level of stress and improve comfort for more types of bicyclists, and contribute to an increase in bicycle volumes and mode share.

Note: Bicycle lane classifications above are from "Caltrans Bikeway Classification Guide" published July 2017.



Class I Bikeway



Class III Bikeway



Class II Bikeway



Class IV Separated Bikeway

STANDARDS

5.3.1 Waterfront Connection

The Blue Greenway shall conform to the street section shown in Figure 4.19, connecting to bicycle facilities on 23rd Street and Pier 70. Design shall include effective warning cues and controls, per National Association of City Transportation Officials (NACTO) and shall adhere to SFMTA guidelines in order to minimize pedestrian, bicycle, and vehicular conflict. See Section 5.17.

5.3.2 Pier 70 Connection


The Class II bicycle lanes on Maryland Street shall connect to proposed bicycle facilities north of Craig Lane, as shown in Figure 5.18.1. Effective warning cues and controls per NACTO and SFMTA guidelines shall be included in the design of the Maryland Street facility to minimize pedestrian, bicycle, and vehicular conflict when transitioning to and from the Class II to the Class III facility proposed for Pier 70.

5.3.3 Required Bicycle Facilities

A) 23rd Street: A Class IV bicycle facility shall be provided on the north side of the street, extending from Illinois Street to Delaware Street. A Class IV bicycle facility shall be provided on the south side of the street from Illinois Street to Georgia Lane. A Class II bicycle lane shall be provided on the south side of 23rd Street from Georgia Lane to Delaware Street.

- B) Maryland Street: Class II bicycle lanes shall be provided on the east and west sides of the street.
- C) Georgia Lane: A Class II bicycle lane shall be provided on the east side of the street; sharrows shall be provided on the west side of the street.

Figure 5.3.1 Bicycle Network

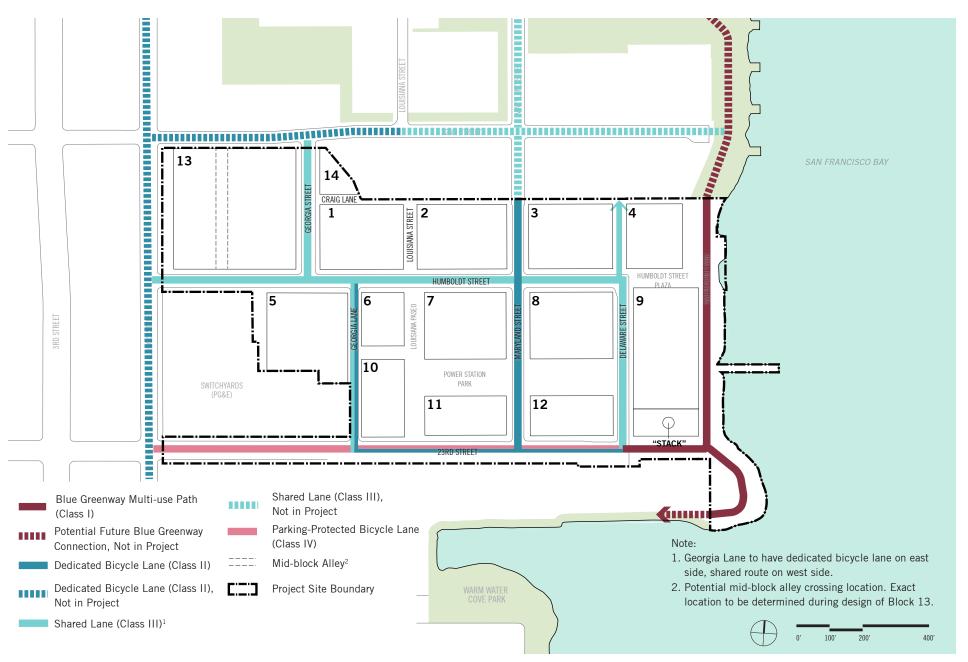

5.4 On-Street Class II Bicycle Parking

STANDARDS

5.4.1 Bicycle Parking

Class II Bicycle Parking shall comply with the ratios, design, and location standards and guidelines described in Section 6.20.



Example of a Class II bike rack.

GUIDELINES

5.4.2 Bicycle Rack Placement

Bicycle racks should be provided near major destinations, such as childcare facilities, libraries, transit stops, major shopping and service destinations, as well as other locations with high pedestrian traffic.

Racks should be located either in the furnishing zone or on curb extensions where possible. Racks should not be placed at accessible parking (blue curb) zones or passenger loading zones.


For bicycle rack placement at the Muni transit stop, see SFMTA *Bike Parking: Standards, Guidelines and Recommendations, Appendix E: Bicycle Racks at Transit Stops*, updated December 3, 2015).

Bicycle rack locations shown in Figure 5.4.1 are intended to serve as illustrative guidelines, though Class II bicycle parking shall comply with the standards regarding bicycle parking provided in Section 6.20.

5.4.3 Bicycle Parking Lighting

Bicycle parking areas should be sufficiently lit for safety and functionality. See Sections 7.2 for Street Lighting Design.

Figure 5.4.1 On-Street Class II Bicycle Parking

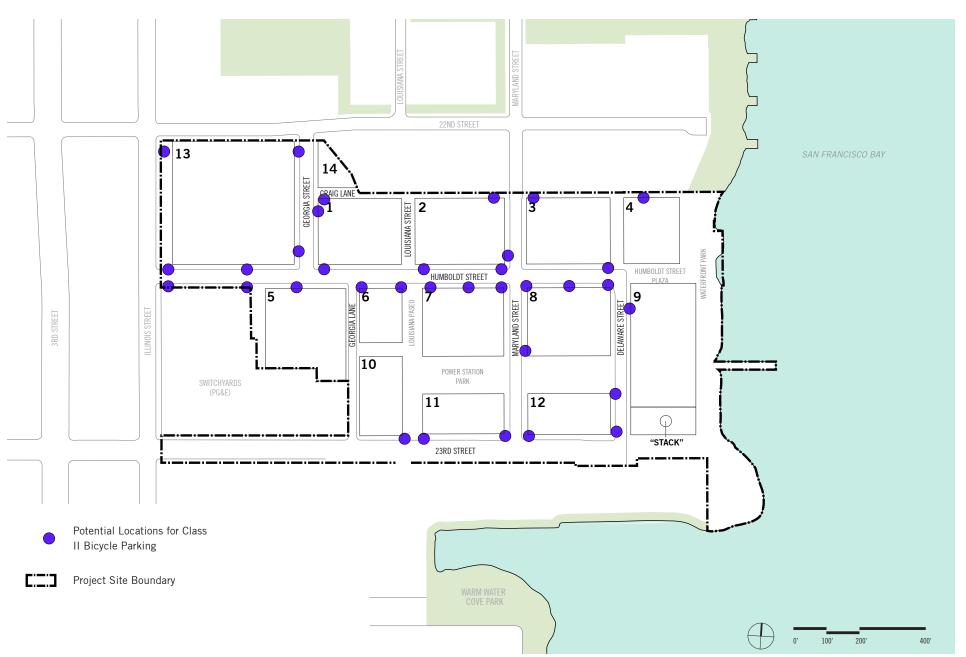

5.5 Transit Network

The Power Station benefits from close proximity to both regional and local public transit services. A planned Muni bus line will bring the transit system into the site itself, providing a convenient option for accessing the broader City and regional transit networks.

The planned Muni line, temporarily called the "XX" (as of September, 2018), is proposed to run through the site via Maryland, Humboldt, and Delaware streets, and the Power Station project will provide a terminus on 23rd Street (see Figure 5.5.2 for the proposed route through the site and Figure 5.17.7 for a street cross-section of 23rd Street at the terminus). Although the exact path of the new line outside the site has not been finalized, it is envisioned to continue west of the site through the Dogpatch, lower Potrero Hill, and Mission neighborhoods before connecting to the 16th Street Bay Area Rapid Transit (BART) station and, potentially, the Castro Muni Metro station.

A terminal stop for the "XX" is planned for on 23rd Street, adjacent to Block 12 at the Power Station. A transit shelter and restroom for Muni drivers, is planned for Block 12. See Section 6.8.1 Transit Support Facilities for requirements.

STANDARDS

5.5.1 Bus Layover


The bus layover shall meet SFMTA requirements for a terminal stop, which can accommodate two 40-foot buses. See Section 5.17.7.

5.5.2 Bus Shelter

Due to utility easement constraints, the bus shelter provided at the terminal stop shall be coordinated with the building design on Block 12 (See Section 6.8.1).



Figure 5.5.2 MTA Proposed Bus Route

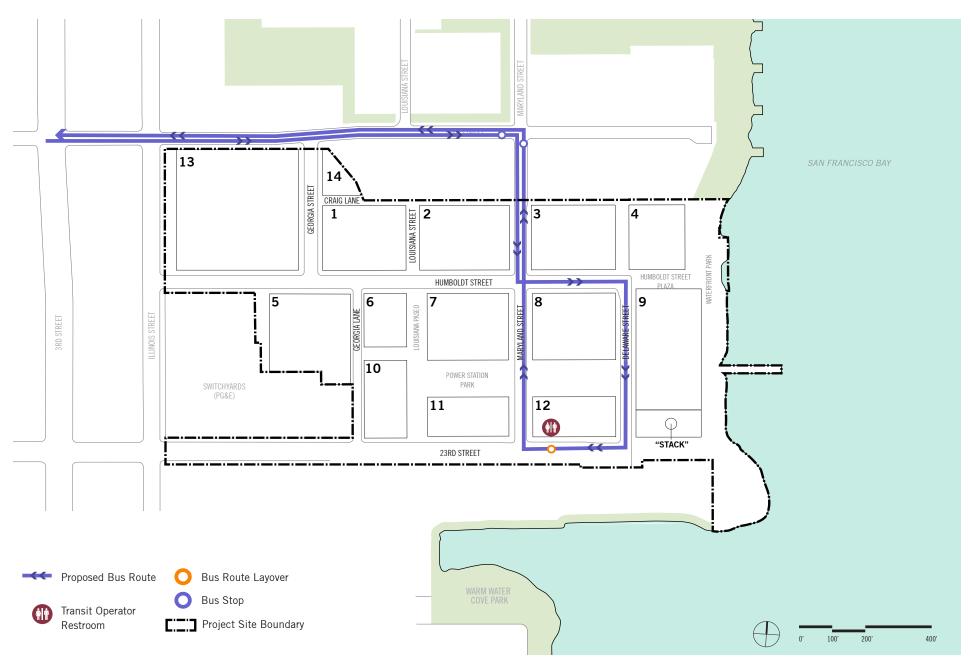

5.6 Shuttle Network

The project is located close to the region's core rapid transit services. To facilitate adequate connections to BART and Caltrain, the site will provide peak-period shuttle connections at 15 minute intervals to the 16th Street/Mission BART station, with a stop at the 22nd Street Caltrain station. The route of the shuttle may change over time, as approved by the SFMTA.

The shuttle service is intended to supplement SFMTA service, not replicate it. As described in Section 5.5, SFMTA's planned bus line (currently called the "XX") will serve the 16th Street/Mission BART station. Additionally, the agency has approved significant service increases on the T-Line light-rail line, which will provide improved access to downtown. The project will provide sufficient service to meet the needs of residents, employees, and visitors, and in keeping with that commitment, shuttle service consistent with the project's Transportation Demand Management Plan will be provided. Future routes will be coordinated with SFMTA.

See Figure 5.6.1 for the proposed Shuttle Route Plan within the larger city context. See Figure 5.6.2 for the proposed shuttle route on-site. Two routes are shown; the alternate route without the connection through Pier 70 is provided to allow for flexibility during implementation


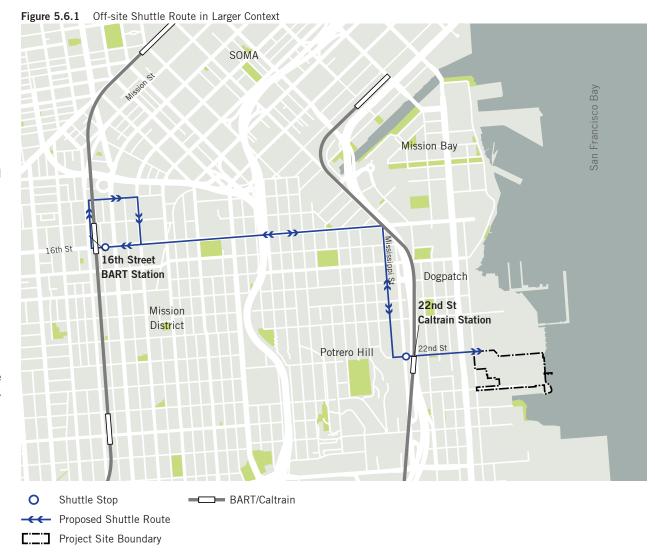


Figure 5.6.2 Shuttle Routes Within the Site

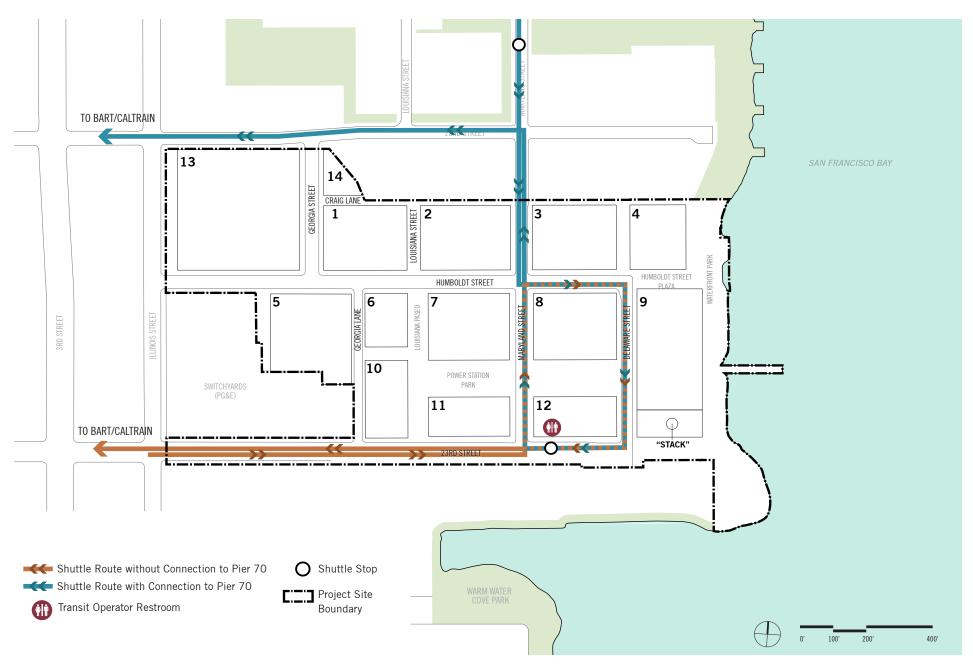

5.7 Vehicular Network

The Power Station's street network has been designed as an extension of the City's existing grid. Maryland Street will provide a direct north-south spine for vehicle travel through the site, while Humboldt and 23rd streets, with their direct connections to Illinois and Third streets, respectively, will provide east-west connections to and from the site.

Traffic-calming measures will be an important aspect of the vehicular network. Bulb-outs, raised streets and intersections, midblock crossings, special paving zones, and on-street parking will work together to slow vehicular traffic and create a safe environment for non-vehicular modes of travel.

STANDARDS

5.7.1 Vehicular Circulation

All streets at the Power Station shall have two-way traffic circulation, with the exception of Craig Lane, which shall have one-way traffic in the westbound direction only. Refer to Figure 5.7.1.

5.7.2 Intersections

All stop-controlled and signalized intersections shall adhere to SFMTA standards for signage and street markings. Refer to Figure 5.7.1 and to the Infrastructure Plan.

Where crosswalks at uncontrolled intersections are proposed, an appropriate combination of traffic control strategies, including crosswalk markings, shall be employed to maximize visibility and safe pedestrian crossing.

5.7.3 Traffic Calming

Traffic-calming measures shall include the following:


Bulb-outs. See Street Character Sections 5.17 through 5.22 for locations.

Midblock Crossings. See Figure 5.2.1 for locations.

Raised Pedestrian Crossings. See Figure 5.2.1 for locations.

Special Paving. See Section 5.16 for paving strategies.

Figure 5.7.1 Vehicular Network

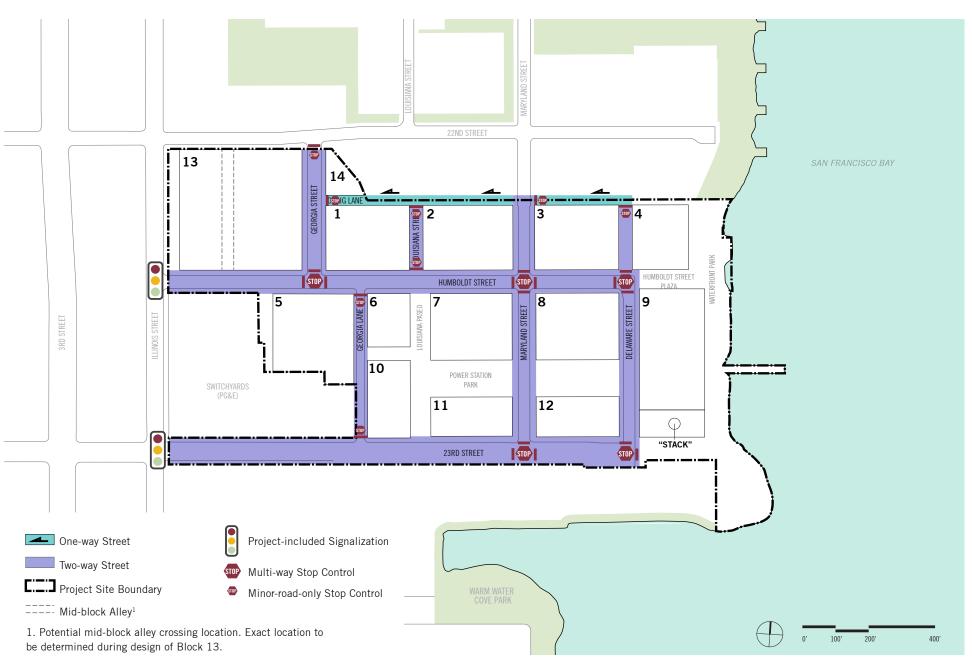

5.8 Emergency Vehicle Access

STANDARDS

5.8.1 Fire Access in Streets

Streets shall provide a minimum 26-foot-wide clear path of travel where indicated in Figure 5.8.1 unless otherwise approved by SFFD. The 26-foot-wide clear path is to be positioned such that the truck ladder turn table can be positioned at least 15 feet and no greater than 30 feet from the building.

The clear-path dimension assumes that parked cars only occupy 7-feet from the adjacent curb, and may include multiple vehicular travel lanes and bicycle lanes. On shared streets, the clear-path dimension may include bollards separating the pedestrian zones from the travel lane.

Each building shall be provided the Fire Department with a staging area adjacent to the primary building entrance with a minimum length of 100-feet. This staging area will fall within the 26-foot-wide clear path of travel.

5.8.2 Road Weight Capacity

All pathways provided for emergency vehicles, whether on roadways, in parking structures, or through public parks and passageways, shall support a minimum vehicle weight of 75,000 pounds, including the Blue Greenway which will provide fire engine, ambulance, and maintenance vehicles access.

5.8.3 Turning Requirement


In accordance with SFFD requirements, intersections shall be designed to accommodate the 57-foot articulated fire truck ("ladder truck") and the FE-30 ("engine"). The truck and engine are permitted to turn into the opposing travel lane provided that separation of from the truck to the opposing curb of at least 7-feet is maintained.

See the appendix of the Infrastructure Plan for fire truck turning movements for the 57-foot ladder truck and engine.

5.8.4 Intersections

Per SFFD instructions, fire trucks may encroach into oncoming travel lanes to complete turning movements. Each intersection shall be designed to allow for a seven-foot refuge area for vehicles traveling in the opposing direction of travel, which is inclusive of any bicycle facilities that are adjacent to travel lanes (i.e., Classes II and III).

Figure 5.8.1 Emergency Vehicle Access

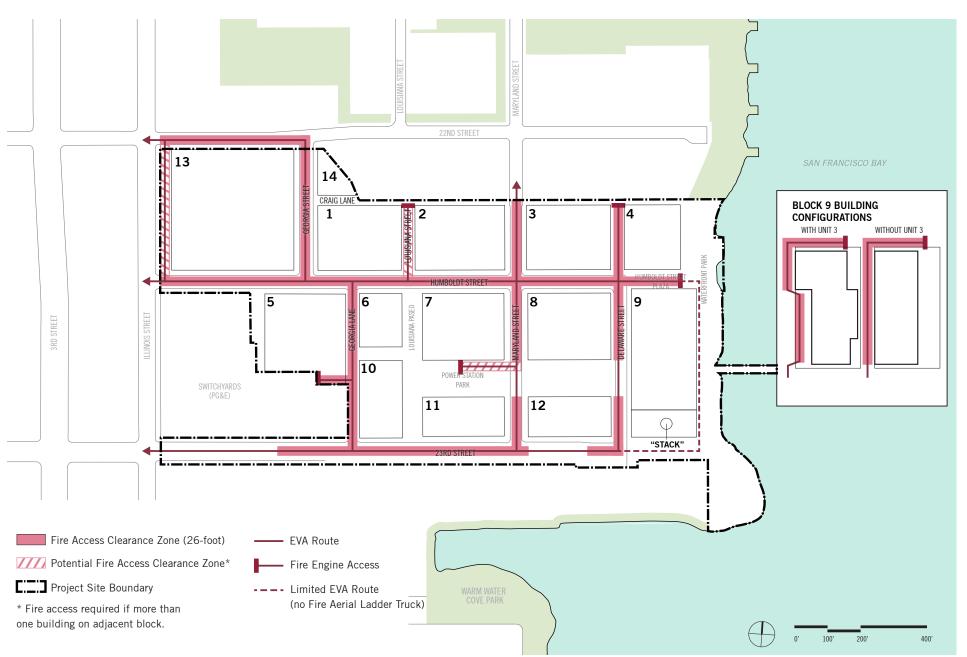

5.9 Curb Management

The Power Station has been designed to allocate sufficient space to meet passenger and commercial loading demand, as informed by San Francisco's Transportation Impact Analysis Guidelines for Environmental Review (as most recently updated in February 2018). This D4D is also informed by emerging research on the use of ride-hail services by San Francisco County Transportation Authority, entitled "TNCs Today: A Profile of San Francisco Transportation Network Company Activity" (published June 2017).

The site will provide loading facilities through a combination of on- and off-street spaces. On-street loading spaces will be well distributed, with access to each building as appropriate for the planned land uses and building sizes. Curbside loading activities must be balanced with needs for stormwater management, transit and bicycle facilities, driveways for loading docks, and fire access for buildings.

STANDARDS

5.9.1 Curbside Loading


Passenger and commercial loading shall be designated on curbs to meet demand as required by San Francisco's Transportation Impact Analysis Guidelines for Environmental Review. Figure 5.9.1 shows curb space available for striping.

See Section 5.10 for universal passenger loading zones and accessible parking standards.

5.9.2 Metered Curb

Meters, where required by SFMTA, shall meet SFMTA guidelines and policies.

Figure 5.9.1 Curb Management

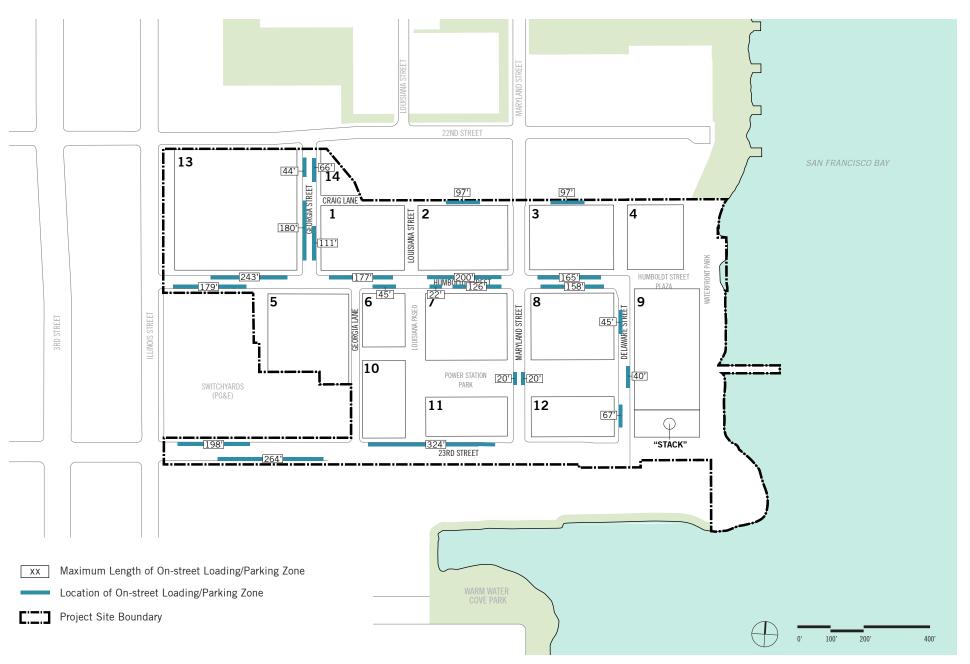

5.10 Universal Passenger Loading Zones and Accessible Parking Stalls

On-street universal passenger loading zones and accessible parking stalls are located at select locations distributed throughout the site, providing convenient access to the site's buildings and open spaces based on proximity and topography. The D4D offers a sitewide approach to and standard design of loading and accessible parking zones.

STANDARDS

Universal access on the site is provided per Figure 5.10.1.

5.10.1 Universal Passenger Loading

Universal passenger loading zones are spaces equipped with a safe unloading zone and a curb ramp; they may be accessed by anyone on a temporary basis for the purpose of loading or drop off, but not for parking.

Universal passenger loading zones shall be provided in a minimum of eight locations within the site. Where a passenger loading / drop-off zone is provided, it shall be universally accessible and ADA-compliant.

Passenger loading activities shall be limited to fiveminute stops, per SFMTA regulations, and drivers must remain within the vehicle. Universal passenger loading zones must be located to provide convenient access to buildings, crosswalks, parks, and open spaces.

Figure 5.10.2 provides required dimensions for universal passenger loading zones.

5.10.2 Accessible Parking Stall Distribution

The project shall provide a minimum number of ADA-compliant accessible parking spaces in accordance with the requirements of the ADA and of CBC Chapter 11B (Table 11B-208.2).

Accessible parking stalls shall be distributed throughout the site as much as possible, while generally located near corners (to economize curb space) and where there are minimum street and sidewalk slopes, as illustrated in Figure 5.10.3.

5.10.3 Accessible Parking Stall Dimensions

Dimensions shall be as follows:


- 20-foot stall, adjacent to the sidewalk, clear of objects.
- 10-foot loading area at rear, with SFDPW-standard curb-ramp.

The striping of public streets for universal passenger loading and accessible parking will ultimately be determined by the SFMTA.

Figure 5.10.1 Universal Passenger Loading Zones and Accessible Parking




Figure 5.10.2 Universal Passenger Loading Zone

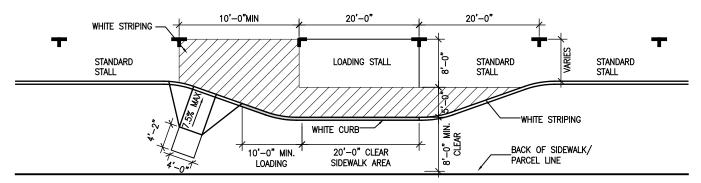

NOTE:

FIGURES DEPICT TYPICAL REQUIRED DIMENSIONS, CLEARANCES, STRIPING AND CURB PAINTING. FINAL LAYOUT OF PARKING AND LOADING MAY VARY DEPENDING ON FINAL PARKING LAYOUT AND CURB GEOMETRY AT EACH PARKING AND LOADING ZONE LOCATION.

Figure 5.10.3 Accessible Parking Stall

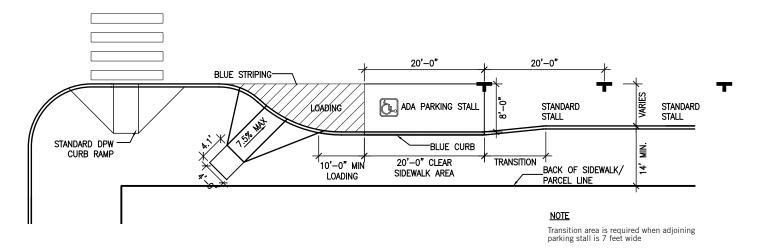

STREETS

[This page intentionally left blank.]

5.11 Urban Forest

The urban forest at the Power Station will function ecologically to help achieve the project's goals for sustainability and contribute to a healthy environment. Composition and distribution of a diverse, adaptive urban forest will create a resilient ecological framework to shape varied sensory experiences across the site and provide waterfront and urban habitat.

Trees have been selected and located to provide shade to pedestrian corridors and gathering spaces within the Power Station's streetscapes, as well as to reduce the urban heat-island effect and to provide shelter for birds and other wildlife.

As street trees are some of the most functional and iconic elements in the streetscape, careful selection is important in creating a successful urban forest.

The following standards and guidelines apply only to areas within the public right of way, such as streets and publicly owned open spaces. For urban forest areas outside of the public realm, such as within privately owned publicly accessible open spaces, please refer to Section 4.5. Urban Forest.

STANDARDS

5.11.1 Urban Forest Composition

Suggested species diversity in Figures 5.11.1 and 5.11.2 is a baseline; species selected for specific streets shall conform to this general distribution and diversity.

5.11.2 Tree Species Selection



Except as stated below, tree species selection shall adhere to Standards identified in Section 4.5.2.

If alternative species are chosen, they shall conform to the aesthetic and performance requirements outlined in Figures 5.11.1 and 5.11.2 and to the irrigation requirements described in Sections 5.12 through 5.14.

5.11.3 Tree Species and Installation and Establishment A) Soil Volume

Trees shall receive adequate soil volume to sustain longterm health: see Sections 4.5.4 and 5.12.8.

B) Minimum Installation Size

Large- and medium-size trees shall be installed with a minimum box size of 36 inches. Refer to Figure 5.11.2 for minimum box sizes corresponding to each tree size at installation.

C) Clear Trunk Requirements

See Section 4.5.3(d).

D) Establishment Period

See Section 4.5.3(e).

CONSIDERATIONS

5.11.4 Habitat and Wildlife Connections



The urban forest may be used to provide habitat and improve wildlife connections. Prioritize the location of habitat-supportive trees along pedestrian-oriented streets. Consider using the San Francisco Plantfinder database to find drought-tolerant plants that support habitat for this specific area of the city.

5.11.5 Tree Species and Alternative Species Selection




Species that provide habitat opportunities for birds and other small wildlife are encouraged. Tree species for each segment of the streets network shall be selected in consultation with a certified arborist.

Figure 5.11.1 Urban Forest




Figure 5.11.2 Tree Species Selection

HUMBOLDT STREET т 35-40'




- Medium to large Evergreen or Deciduous tree (35 to 40-foot tall at maturity)
- Minimum 36-inch box at installation
- Arching, graceful form, with special ornamental character if possible
- Tolerances: medium wind tolerance; tolerant of part- to full-shade; healthy in paving, with minimal root disruption at sidewalk
- Low water use
- Recommended species: Victorian Box [Pittosporum undulatum], California Pepper [Schinus molle], Cork Oak [Quercus suber]

DELAWARE STREET MARYLAND STREET **GEORGIA STREET HUMBOLDT STREET AT BUS** TRAVEL LANE



- Medium to large Evergreen or Deciduous tree (to 40-foot tall at maturity)
- Minimum 36-inch box at installation
- Upright Form
- Tolerances: medium wind tolerance; tolerant of part- to full-shade; healthy in paving, with minimal root disruption at sidewalk
- Low water use
- Recommended species: Brisbane Box [Lophostemon confertus], Water Gum [Tristaniopsis laurina], African Fern Pine [Afrocarpus gracilor]





- Medium to Large Evergreen tree (30 to 35-foot tall at maturity)
- Minimum 36-inch box at installation
- Upright form
- Tolerances: high wind tolerance; tolerant of coastal environment: healthy in paving
- Low water use
- Recommended species: Brisbane Box [Lophostemon confertus], Melaleuca [Melaleuca quinquenervia], Norfolk Island Hibiscus [Lagunaria patersonii], African Fern Pine [Afrocarpus gracilor]

LANES AND ALLEYS



25'-30'



- Medium Deciduous (25 to 30-foot tall at maturity)
- Minimum 36-inch box at installation
- Upright form with fall and summer interest; Iconic seasonal ornamental character in leaf or flower
- Delicate leaf; medium-fine textured canopy
- As uniform as possible; close spacing
- Tolerances: medium wind tolerance; tolerant of part-shade conditions; healthy in paving, with minimal root disruption at plaza paving
- Low water use
- Recommended species: Chinese Pistache, [PIstachia chinensis 'Keith Davey', Ginkgo [Ginkgo biloba 'Autumn Gold-Fruitless], Golden Rain Tree [Koelreutia bipinnata]

HUMBOLDT STREET



Victorian Box



California Pepper



Cork Oak

DELAWARE STREET MARYLAND STREET GEORGIA STREET



Brisbane Box



Water Gum



African Fern Pine

23RD STREET



Brisbane Box



Melaleuca



Norfolk Island Hibiscus


LANES AND ALLEYS



Chinese Pistache



Ginkgo



Golden Rain Tree

5.12 Street Trees

STANDARDS

5.12.1 Tree Wells

Tree well sizes and openings have been developed based on the type of trees selected in each location. Each opening shall meet or exceed the tree pit/opening minimum size requirements of four feet wide by six feet long, with a minimum depth of three feet and six inches.

The surface of a tree well shall allow water to penetrate the soil below, as well as protect the tree root zone from compaction. The tree-well surface must be installed and maintained to be flush with adjacent sidewalk paving and comply with SFDPW guidelines. Tree grates shall be used only where accessible surface is required for adequate Pedestrian Throughway widths. In all cases, crushed stone mulch or groundcover planting shall be placed at tree well surfaces. See annotated block plans in Sections 5.17 through 5.22 for location of tree-pit surface types.

5.12.2 Street Tree Placement

Street trees shall be generally placed within the Furnishing Zones as shown in Figures 5.17 and 5.22. The ultimate street tree locations shall be selected in accordance with required clearances for utilities, street lights, and other streetscape elements.

5.12.3 Soil Composition

Tree well planting soil for back-fill within tree pits shall be sandy loam soil, amended as required to provide a healthy and fertile root zone.

5.12.4 **Staking**

Manufactured wood or steel staking systems shall be used to stake trees, if required, during the establishment period (i.e., if prevailing wind conditions threaten stability of new planting). Refer to the 2018 SFDPW Bureau of Urban Forestry guidelines for tree staking.





Figure 5.11.3 Typical Street Layout Plan

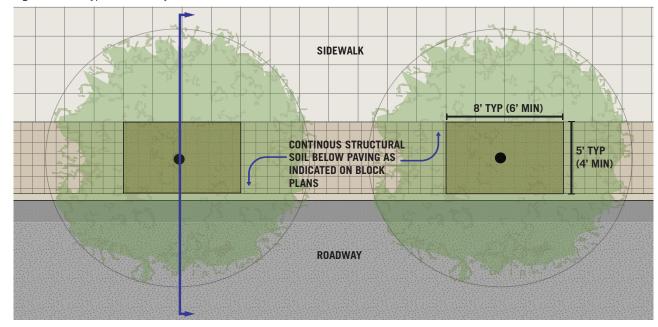

5.12.5 Street Trees and Lighting

Per SFPUC standards: large trees shall be located at a minimum of 21 feet from street lights; medium trees shall be located at a minimum of 15 feet from street lights; small trees shall be placed at a minimum of nine feet from street lights. Tree size is defined per SFDPW Bureau of Urban Forestry standards.

5.12.6 Street Trees at Intersections

Street trees shall be located at a minimum of 25 feet from pedestrian crossings on approach, and 10 feet from pedestrian crossings on exit, measured from the centerline of the trunk.

5.12.7 Irrigation

Landscaped areas over 10,000 square feet in size shall be irrigated with non-potable water (see discussion of site irrigation in Section 4.8) to the extent permitted by SFPUC and state law.

GUIDELINES

5.12.8 Soil Volume

See Section 4.5.4

5.12.9 Irrigation

Centrally controlled automatic drip irrigation should be provided to each tree for establishment irrigation during the first three years. Following that period, tree irrigation may be reduced or eliminated.

Figure 5.12.1 Intersection Visibility Tree Planting Not Permitted

5.13 Streetscape Planting

Streetscape plantings enhance the identity of a street network and provide opportunities for adding unique character to special districts within a greater neighborhood context. The following palette represents an array of locally-adapted species, both native to the area and suitable to Mediterranean climates, notable for their interesting form, flower, foliage, and urban resilience.

STANDARDS

5.13.1 Planting Strips with Street Trees

To allow adequate space for healthy tree growth, planting strips with street trees shall be a minimum of four feet in width, with the tree centered and placed at a minimum of 18 inches from the edge of curb. See Section 5.11 for urban forest standards and guidelines.

5.13.2 Planting Strips

Streetscape plantings shall be permitted on all streets, with the exception of the portions of 23rd Street that have utility easement conflicts.

Planting strips without street trees shall be a minimum of four feet in width.

Where sidewalk width is less than 10 feet, three-foot-wide planting strips are permitted if a minimum four-foot Pedestrian Throughway can be provided.

GUIDELINES

5.13.3 Streetscape Planting Composition

Suggested species diversity in Figure 5.13.1 is a baseline; species selected for specific areas shall conform to this general distribution and diversity for the Power Station streetscape.

5.13.4 Streetscape Planting Selection

Streetscape planting should use regionally-appropriate, native, and/or adaptive species to limit irrigation demand.

CONSIDERATIONS

5.13.5 Streetscape Planting Selection

Consider using streetscape planting that supports local habitat.

5.13.6 Multistory Planting

For streetscapes with limited space for street-level vegetation, consider planting palettes with varying plant heights to increase habitat benefit and biodiversity.

5.13.7 Support Pollinator Habitat

Where possible, design streetscape planting that supports pollinator habitat. Select brightly colored, native plants that flower across multiple seasons. A minimum planting area of 20 square feet is encouraged, with access to full sun. Consider placement near building entrances and/or seating areas, for increased visibility and access by residents and visitors.

5.13.8 Non-Potable Irrigation

Non-potable irrigation should be used. See Section 4.8 for Irrigation standards.

5.13.9 Understory Planting

Upon construction, the maintenance and management of tree and understory planting, soils, and irrigation will be essential to the successful functioning of the site's urban ecological systems. General considerations for understory planting species are as follows:

- Compatibility with site soils and microclimates
- Durability in urban settings
- Low water-usage
- Compatibility with co-located street trees
- Low maintenance needs
- Meeting street service needs (such as biofiltration)
- Seasonal interest
- Ecological benefits

The plant palettes provided in this document express a design intention, and should guide the selection of plants throughout the site, as determined within the subphase of each development area.

Figure 5.13.1 Example Streetscape Plant Species for Ground Level Planting



5.14 Stormwater Management





Example steetscape stormwater planters, with and without integrating seating elements.

STANDARDS

Except as stated below, Stormwater Management Section 4.7 shall apply.

5.14.1 Streetscape Stormwater Treatment Planter Design

Stormwater management planters within the streetscape shall adhere to accessibility and safety standards, with minimum six-inch curbs protecting pedestrians from trip and fall hazards. The level of planted surfaces within stormwater management planters shall be no greater than 18 inches below the surface of the adjacent sidewalk. Design of steetscape stormwater planters shall be generally consistent across the project area.

5.14.2 Site Irrigation

The site irrigation standards given in Section 4.8 shall apply.

GUIDELINES

5.14.3 Stormwater Management Plantings See Figure 4.7.3 for a suggested plant palette for stormwater treatment gardens.

Figure 5.14.1 Stormwater Management for Streets



5.15 Furnishing

Streetscape furnishings help establish the identity of a district or neighborhood. Along with planting, lighting, and paving, street furnishing is an integral streetscape element that helps make streets an inviting and comfortable part of the public open space network. The Power Station will implement a district-wide approach to furnishing that allows for variety while establishing a unified look and feel that contributes to a unique neighborhood identity. Furnishings provided at the Power Station may vary from those discussed below, as SFDPW must accept all streetscape elements that are a part of the public right-of-way.

STANDARDS

5.15.1 Furnishing Zone Design

Furnishings shall be located within the furnishing zone, unless otherwise provided for within outdoor cafe-seating areas or as part of the transit shelter on Block 12.

5.15.2 Seating

Where provided, seating shall be placed outside of the Pedestrian Throughway with a minimum buffer (leg room) of two-foot between seating and the Pedestrian Throughway.

Outdoor café and restaurant seating (tables, chairs, umbrellas, heat lamps, etc.) shall be permitted within the Frontage and/or Furnishing Zones of the public ROW, provided that such seating is permitted by SFDPW.

5.15.3 Stormwater Planters

Stormwater planters shall be incorporated into the Furnishing Zone as needed to treat stormwater runoff. See Section 4.7 for Stormwater Planter standards and guidelines.

5.15.4 Tree Grates

Tree grates are generally not preferred, but may be used on streets or alleys, as a way to augment an accessible path of travel. Where provided, tree grates shall meet ADA accessible path-of-travel guidelines and shall be flush with adjacent sidewalks and other pedestrian areas.

GUIDELINES

5.15.5 Furnishing

Furnishings should be compatible with and reflect the scale and industrial character of the district and be utilitarian in materiality and design. Elements provided in the furnishing zone shall have related character, scale and intention along the length of a single street but are not required to be identical to elements on other streets unless otherwise noted.


5.15.6 **Seating**

Seating should be concentrated in areas of high pedestrian and retail frontage activity.

Seating materials should be selected or designed to be inviting, comfortable, and accessible. Seating should be selected that does not get too hot or cold in the sun or shade and is comfortable for sitting year-round.

Benches shall be durable, attractive, and support the value of a high-quality public realm. Seating materials shall be chosen for longevity, suitability for high-use in an urban environment, and ability to withstand the local marine environment.

5.15.7 Waste and Recycling Receptacles



Separate compost, recycling, and landfill receptacles are recommended.

5.15.8 Stormwater Planters and Seating

Stormwater planters at intersections and highest pedestrian traffic areas should integrate public seating into planter design or be adjacent to public seating.

5.15.9 Tree Grates

Tree grate materials should be selected for durability and artful design. Recommended materials include decorative cast iron that weather naturally or are pre-weathered with a hot oil protective coating to prevent staining of adjacent paving.

5.15.10 Bollards

Bollards, where required, should be selected as an integral part of the designed streetscape environment.

CONSIDERATIONS

5.15.11 Furnishings

Consider using materials and products that incorporate recycled materials, sustainable wood products, non-toxic finishes, and environmentally responsible manufacturing practices.

Interpretive elements may be incorporated into Street Furniture design.

5.15.12 **Bollards**

Weathered, galvanized, or painted steel bollards with flat caps are recommended.

5.15.13 Salvaged Material



Salvaged materials and artifacts from the site should be incorporated into streetscapes and public open spaces if feasible and safe for public use.

Figure 5.15.1 Furnishings Palette

PUBLIC BENCHES









Custom Cast Iron Bench with Back

Custom Cast Iron Bench - Backless

Manufactured Bench with Back

Manufactured Bench-Backless

TREE GRATES

or similar



Decorative Cast Iron Tree Grates - Iron Age

TRASH RECEPTACLES



Trash and recycling receptacles



Landscape Forms 'Central Park'

BOLLARDS



Bollards: Calpipe or Similar - Stainless or Weathered Steel Finish

5.16 Paving and Materials

Paving will be a key component that defines the character, connectivity, and identity of the Power Station's varied streets and open spaces. Paving strategy should be considered as an interconnected site-wide system that activates the public realm and contributes to the overall pedestrian, bicycle, and vehicular circulation on the site. All paving in areas with high pedestrian traffic will be designed to facilitate accessibility. Paving design in the streetscape shall be carefully considered with the placement of lights, light pull boxes, utilities, utility vaults, and other surface expressions of underground utilities. As such, this plan recommends the practical approach of using cast-in-place concrete in most sidewalk and furnishing zone applications. SFDPW standard materials are permitted in all locations and required in public rights-of-ways as a baseline.

STANDARDS

5.16.1 Pedestrian Throughway Materials

The Pedestrian Throughway shall be an accessible path of travel that is unobstructed and ADA compliant. Paving material shall be SFDPW standard cast-in-place concrete.

5.16.2 Furnishing Zone Materials

The Furnishing Zone shall be cast-in-place concrete. either standard SFDPW concrete, or enhanced-finish cast-in-place concrete.

5.16.3 Roadway Materials

Roadway materials shall conform to 2015 SFDPW standards. Asphalt vehicular paving shall be the primary road surface. Concrete vehicular paving is allowed at traffic tables and at Delaware Street (see Figure 5.16.1). On-site construction demolition debris shall be used as road aggregate base, if feasible.

5.16.4 Material Quality and Consistency

See Section 4.11.2.

5.16.5 Surfacing at Tree Planting A) Trees in Paving

See Section 4.11.3(a). Tree grates or crushed stone are permitted in the furnishing zone outside of dedicated Pedestrian Throughways.

B) Trees in Planting

See Section 4.11.3(b).

GUIDELINES

5.16.6 Paving Types

Paving should be a key component that defines the character, connectivity, and extent of the Power Station's varied public realm. The following paving zones suggest relationships and common paving identities among different streets.

A) Special Paving on Alleys and Shared Streets

Contrasting, high-quality paving should be used to distinguish shared streets and alleys, as high pedestrian activity areas and as places to linger. Shared streets should incorporate concrete or stone pavers, enhanced cast-in-place concrete, stamped concrete, and highquality, detectable warning pavers that contrast with

adjacent paving, per SFDPW accessibility guidelines. Stamped concrete is encouraged as a paving material for Craig Lane. Refer to paving and materials images and descriptions in Figure 5.16.2.

B) Sidewalks

Standard cast-in-place concrete should be used for Pedestrian Throughways, and standard or enhanced castin-place concrete in furnishing zones.

5.16.7 Paving: Heat-Island Effect



Where possible, in areas that are predominantly unshaded by tree canopy or buildings, reduce the potential for urban heat-island effect by using pavement with a Solar Reflectance Index (SRI) of 29 or higher.

CONSIDERATIONS

5.16.8 Paving: Character and Uniformity

Paving contrast may be introduced through color or geometric variation, textural variation within a single paving module, integral lights, or juxtaposition of scale or material.

Figure 5.16.1 Paving Zones


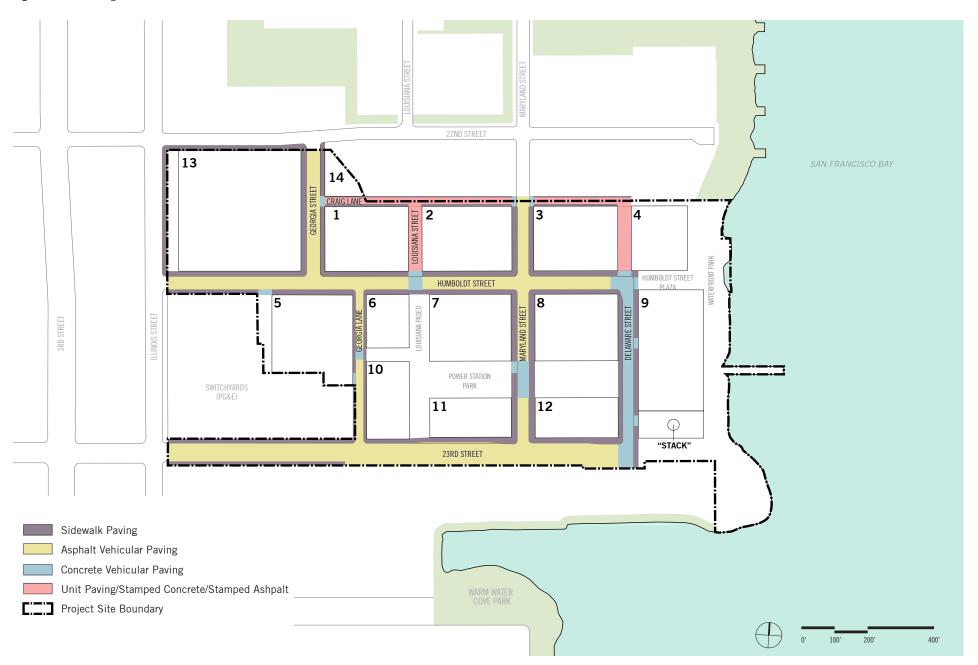


Figure 5.16.2 Paving Palette



DPW STANDARD CAST-IN-PLACE CONCRETE

Per the current (2018) SFDPW specification for cast-in-place concrete for sidewalks. Refer to SFDPW standard for color, finish and typical joint layouts.




ASPHALT VEHICULAR PAVING

Standard asphalt roadway surface, per SFDPW standards.



STAMPED ASPHALT VEHICULAR PAVING

Stamped asphalt is a cost-effective technique for adding decorative patterns to standard asphalt roadway surface. Stamped asphalt may be used in the Craig Lane roadway.



ENHANCED CAST-IN-PLACE CONCRETE

Enhanced concrete may have an exposed aggregate finish for a rich, textured surface and may incorporate special joint patterns for a more refined appearance. Integral color and decorative aggregates shall be selected for aesthetic quality and shall meet accessible design requirements for slip-resistance. Design must be reviewed and approved by SFDPW as part of Street Improvement Plans, Enhanced cast-inplace concrete could occur in all Furnishing Zones and Edge Zones, Delaware Street and Maryland Street Pedestrian Throughways at Power Station Park, Delaware Street Pedestrian Throughway and Vehicular Lanes, Louisiana Street Pedestrian Throughway and Vehicular Lanes, Raised Pedestrian Crossings, and Delaware Street Traffic Lanes.



UNIT PAVERS

Unit paving is a modular system that provides an enhanced level of material quality and detail. Paver color and finish shall be selected for aesthetic quality and shall meet accessible design requirements for proper visual contrast and slip-resistance. Paver edges and joints shall create a smooth, continuous surface. The installation design (paving section) shall ensure a level, stable paying surface and be in accordance with the manufacturer's recommended installation method(s). Within public rights-ofway and where public utilities exist beneath paving, unit pavers shall comply with SFDPW and SFPUC permeable paving guidelines. Designs must be reviewed and approved by SFDPW as part of Street Improvement Plans. Outside of the public right-of-way, unit pavers need not comply with SFDPW standards.




PERMEABLE CONCRETE UNIT PAVERS

Permeable concrete unit pavers may be used in select locations such as Louisiana Street and Delaware Street north of Humboldt (private streets). Paver color and finish shall be selected for aesthetic quality and meet accessible design requirements for proper visual contrast and slip resistance. Paver edges and joints shall create a smooth continuous surface. The installation design (paving section) shall ensure a level, stable paving surface and be in accordance with manufacturer's recommended installation method(s). Where public utilities exist beneath paving, all permeable pavers must be designed per SFPUC's 2016 Green Infrastructure Typical Details and permeable paving guidelines. Outside of the public right of way, unit pavers need not comply with SFDPW standards.



STONE PAVERS AND STONE SETTS

Setts and pavers—quarried stone worked to a regular shape—provide the most refined material quality to special Power Station streets. Stone color and finish shall be selected for aesthetic quality and meet accessible design requirements for slip-resistance. Edges and joints shall create a smooth continuous surface. The installation design (paving section) shall ensure a level, stable paving surface and be in accordance with manufacturer's recommended installation method(s). Designs must be reviewed and approved by SFDPW as part of Street Improvement Plans. Outside of the public right-of-way, unit pavers need not comply with SFDPW standards.



DETECTABLE SURFACE PAVING - SFDPW STAN-DARD

Used where pedestrians enter vehicular zones of the street, standard detectable paving clearly delineates the edge or end of the pedestrianonly zone, consistent with the treatment of public sidewalks throughout the city. Refer to SFDPW standard for material, color, and installation specifications.



DETECTABLE SURFACE PAVING - ALTERNATIVE

Used in special situations where the SFDPW standard detectable surface is not required but a tactile paving treatment is necessary, detectable paving alternatives clearly delineate the edge of the pedestrian-only zone with a textured surface, such as approved truncated dome products. Material shall meet accessible design requirements for slip resistance and provide high visual contrast (70 percent from adjacent paving) per SFDPW standards. To meet these standards, design must be reviewed and approved by SFDPW as part of street improvement plans.



Street Character

The unique character of each street will define a rich and dynamic urban experience as people move through the site.

Neighborhood commercial streets include Humboldt Street, Maryland Street, Delaware Street, and a portion of Georgia Street. With commercial storefronts lining each of these streets, they are likely to be the most active part of the Power Station neighborhood. They will provide enough commercial loading areas to ensure that delivery trucks have easy access to the streets' retail stores and restaurants, with a mix of passenger loading, metered parking, and planting areas along remaining sidewalk frontages. Along Delaware Street, a high-quality connection to the Blue Greenway will be designed.


Along the southern boundary of the site, 23rd Street will be a mixed-use street that gracefully accommodates PDR uses while creating safe and inviting gateways to the site for bicyclists and pedestrians. Specifically, 23rd Street will provide space for the loading activity of larger trucks that supply parts and pick up finished goods from light industrial uses. The project will provide wide sidewalks and protected bicycle facilities on the north side of the street to make walking and cycling safe, and to connect

the Blue Greenway from the waterfront to Illinois Street. The current use of the warehouses on the south side of 23rd Street do not permit the safe operation of sidewalks and Class IV bicycle facilities on the south side of 23rd Street. Sidewalks and protected bicycle facility may be provided on the south side of 23rd Street by the future developer of the property to the south , but only if in the future such facilities would meet SFDPW standards and would be accepted by the City.

Alleys will include Georgia Lane, Louisiana Street and Delaware Street north of Humboldt Street; these alleys may include garage entries. Craig Lane will be a one-way service alley that will accommodate both loading and garage entries.

Unless otherwise mentioned, aforementioned standards and guidelines within this Streets section shall apply to the following streets.

5.17 23rd Street

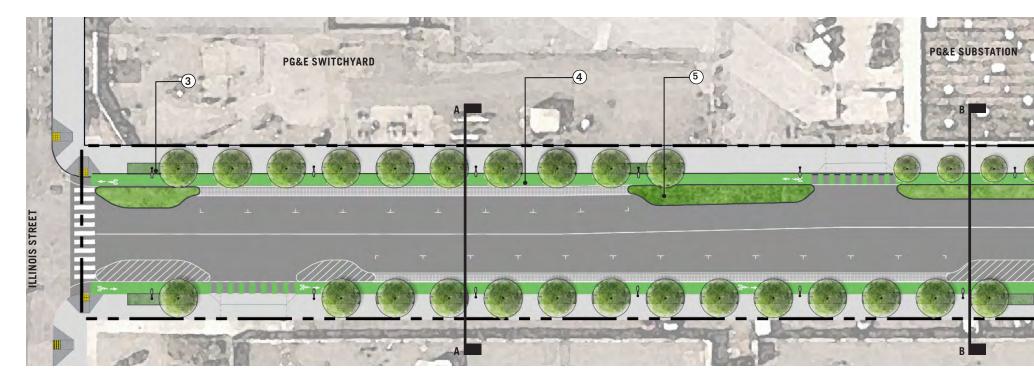

STANDARDS

5.17.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figure 5.17.3 through Figure 5.17.8.

5.17.2 Tree Well Size

Between Illinois Street and Maryland Street, tree wells shall be minimum five-foot wide by ten-foot long. Provide a minimum four-foot paved break in tree wells at regular intervals to allow cyclists to access sidewalk as pedestrians.

5.17.3 Tree Well Surfacing

Tree wells shall either be planted with a diverse mix of ornamental grasses, small woody shrubs, and herbaceous perennials or surfaced with non-stabilized crushed stone.

5.17.4 Bicycle Lane Buffers

At parking-protected bicycle lanes, a clear material change or striping shall mark the buffer between parking and the bicycle lane. Where feasible, raised buffers and 'islands' should be planted with low shrubs, ornamental grasses and perennials. Planted buffers shall allow clear visibility at intersections, crossings and curb cuts. Plants in buffers and islands shall not exceed 36 inches in height.


5.17.5 Block 10, 11 & 12 Frontage

Where utility easements preclude planting and fixed streetscape elements, signage, awnings, canopies and/or seating shall be permitted to be affixed to the building (see Third Street District Awnings, Section 6.11.3) within the Frontage zone.

5.17.6 Railing between Bike Lane and Retaining Wall

A railing must be placed in between the bike lane and existing brick retaining wall to the south, if moveable planters are not provided.

Figure 5.17.1 23rd Street Plan

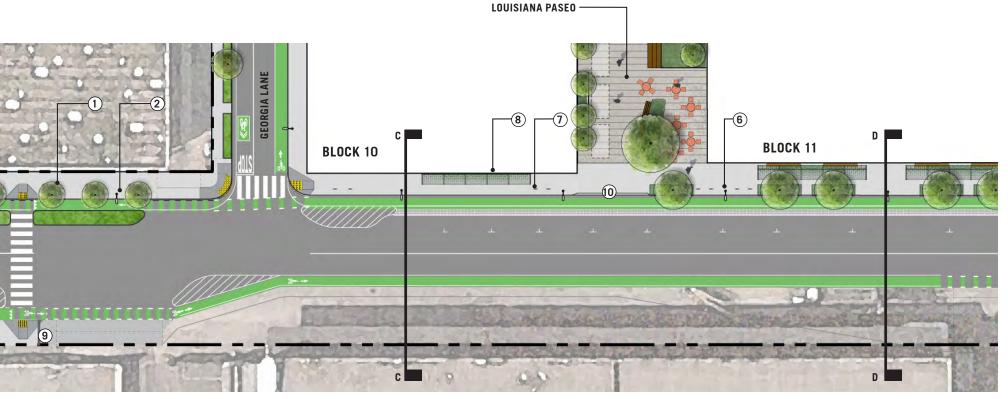

GUIDELINES

5.17.7 Lighting

Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.

- 1 Pedestrian Throughway
- 2 Furnishing Zone
- 3 Planted Tree Well
- Parking-Protected Bicycle Lane
- 5 Planted Buffer6 Street Light
- Bicycle Rack
- 8 Bench
- (9) Pedestrian Barrier
- $\widehat{\text{(10)}}$ Rolled Curb (maintenance and food truck access)

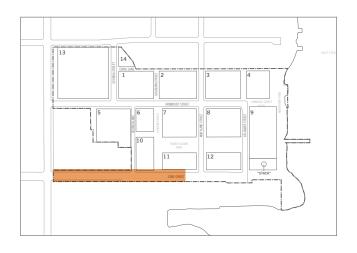



Figure 5.17.2 23rd Street Plan (continued) **LOUISIANA PASEO** GEORGIA LANE **BLOCK 11 BLOCK 10**

5.17.8 Third Street Industrial Character

The streetscape design of 23rd Street should balance the historic utilitarian character of the Third Street Industrial District with welcoming design gestures for this important entrance to the Power Station development. To that end, the following guidelines shall be followed:

 Landscape elements should feel additive to the industrial streetscape. Examples include potted or otherwise designed raised beds of plants and trees that are placed onto paved surfaces; small tree wells within paved surfaces; green walls; and raised or lowered beds edged with industrial materials such as brick, low granite curbs, or steel.

- Tree planting locations should be irregularly spaced or placed in small groupings along the street, in contrast with standard Better Street Plan requirements, in order to provide better compatibility with the historic district.
- A tree and vegetation palette should be used that does not detract from the industrial character. Green walls, planter boxes, and vegetation should be considered rather than trees for storm water management.
- Sidewalk paving at 23rd Street should be more industrial in character compared to sidewalk paving at other portions of the site. Consider varying sidewalk concrete score joint patterns or pavers from block to block
- Pavement at the transit boarding island should incorporate concrete or stone pavers or enhanced castin-place concrete with smaller scale joint patterns for a more refined appearance. Integral color and decorative aggregates may be selected for aesthetic quality and shall meet accessible design requirements for slipresistance. The design must be reviewed and approved by SFDPW and SFMTA as part of street improvement plans.

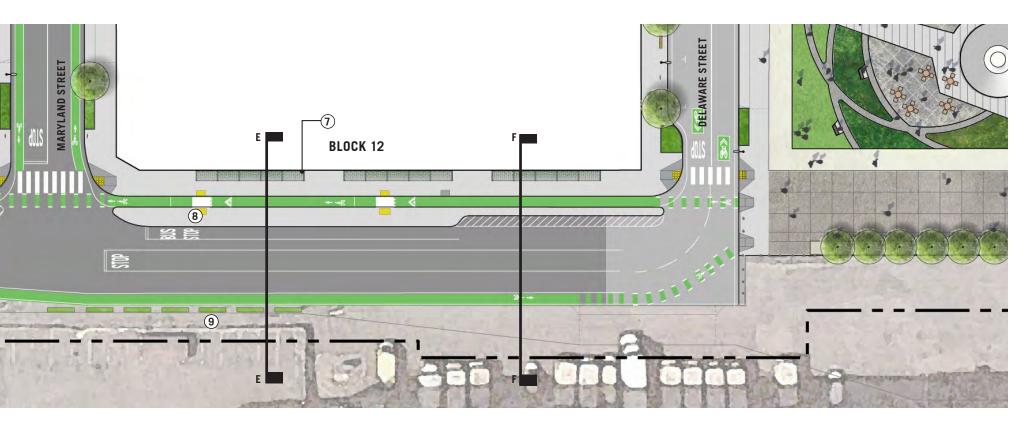

CONSIDERATIONS

5.17.9 Moveable Planters

At the eastbound bicycle lane across from Blocks 11 and 12, movable planters may be placed between the bike lane and the existing brick retaining wall to south.

- Pedestrian Throughway
- Furnishing Zone
- Planted Tree Well
- Parking-Protected Bicycle Lane
- Street Light
- (5)(6)(7) Bike Rack
- Bench
- Transit Island
- 9 Moveable Raised Planters at 5' Buffer Between Bicycle Lane and Retaining Wall








Figure 5.17.3 23rd Street Section - A 7' 5' 5' 5' 5' 1' Pedestrian Planting/ Bicycle Buffer ↑ Throughway Furnishing Lane 10' Travel Lane 5' 5' 7'
Buffer Bicycle Planting/ Pedestrian
Lane Furnishing Throughway P 10' Travel Lane 80' Right-Of-Way

Figure 5.17.4 23rd Street Section - B i 7' 5' 5' Pedestrian Planting/ Bicycle PThroughway Furnishing Lane 5' 5' 5' 7' | Buffer Bicycle Planting/ Pedestrian | Lane Furnishing Throughway P 12' Travel Lane 13' Travel Lane 10' Park/Plaza To Existing Wall 80' Right-Of-Way

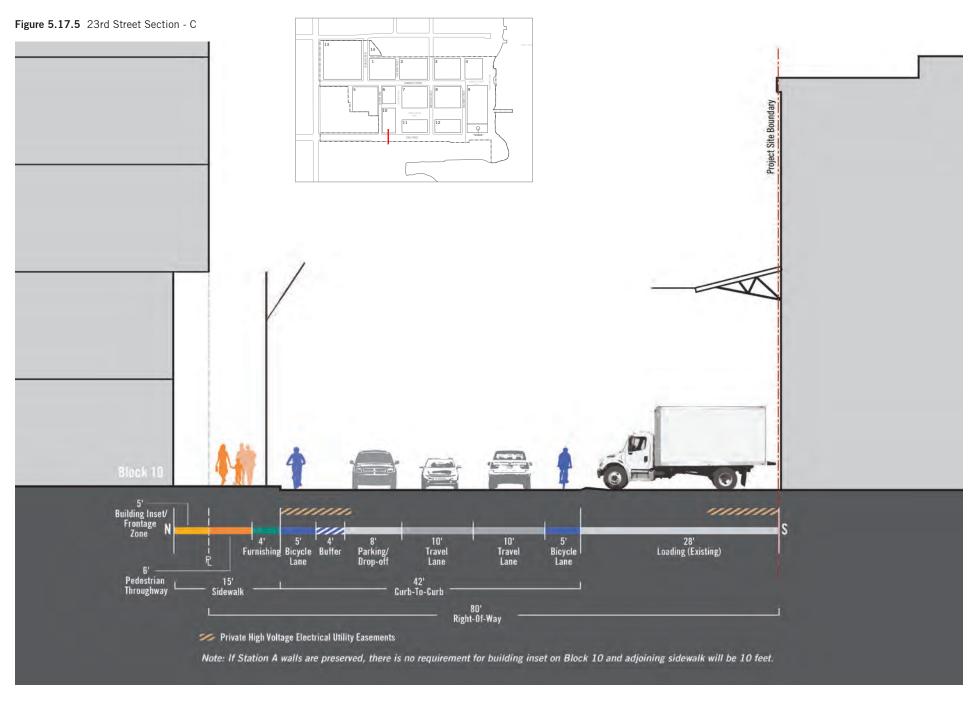


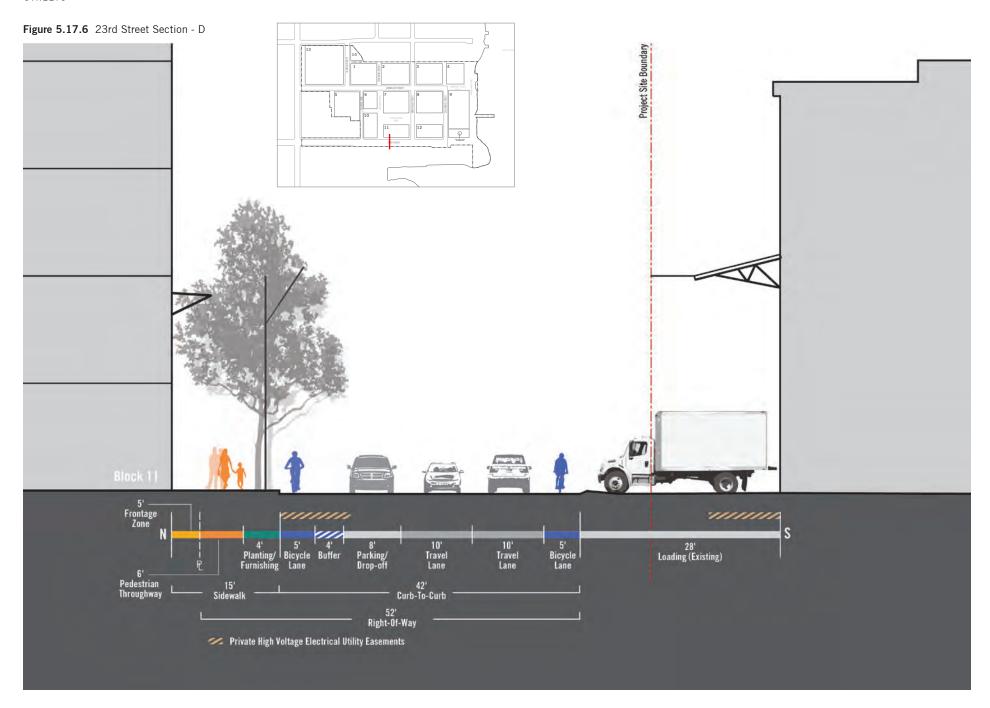

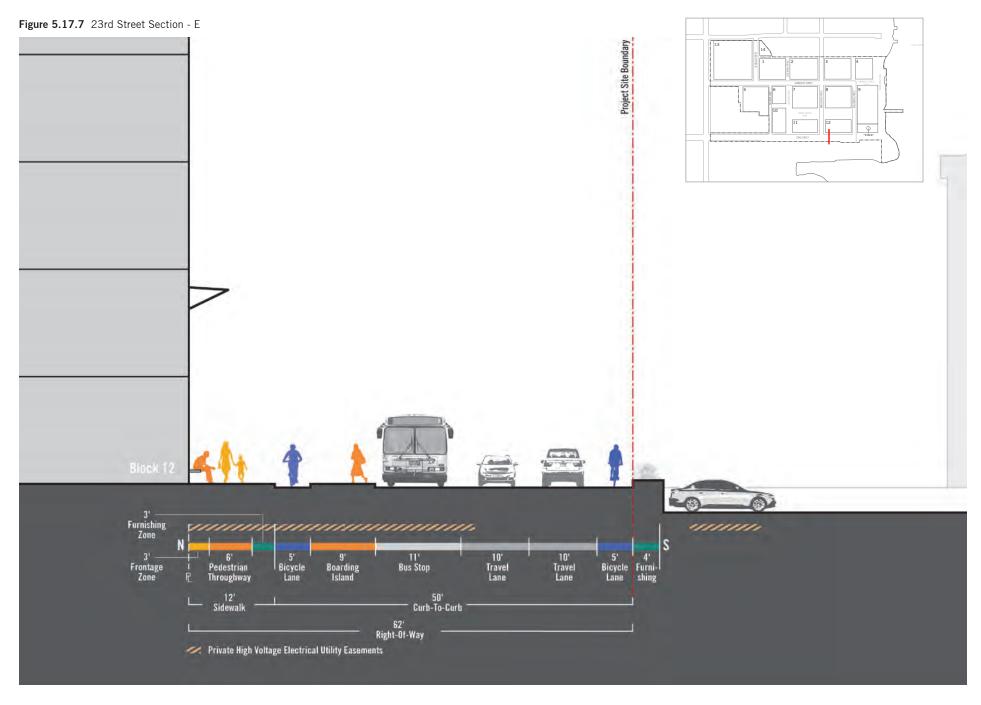

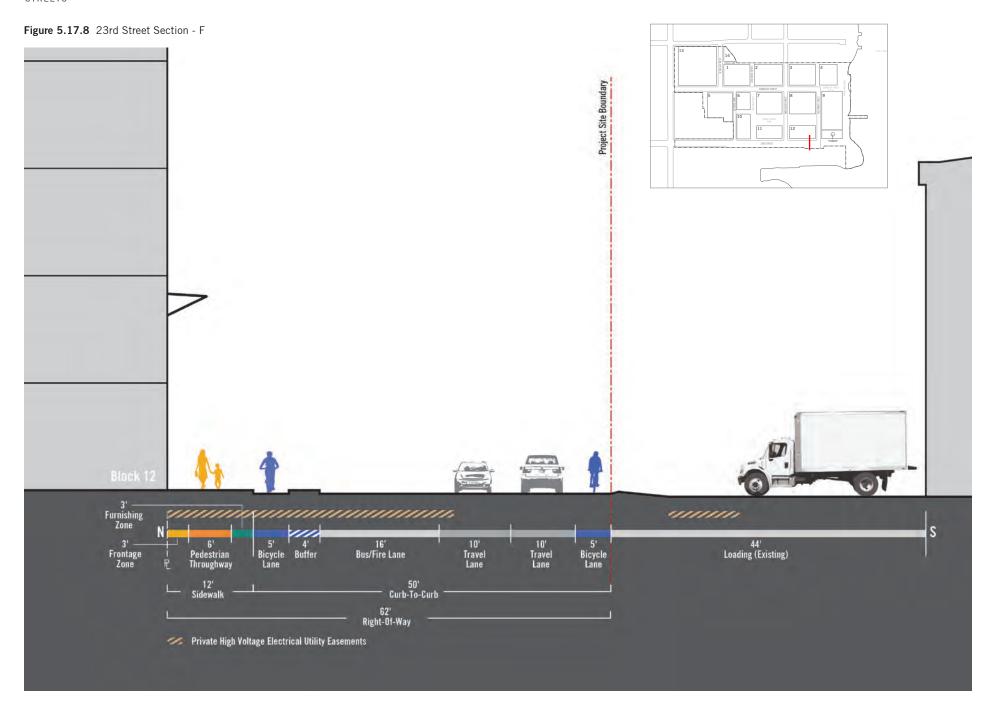

5.18 Maryland Street

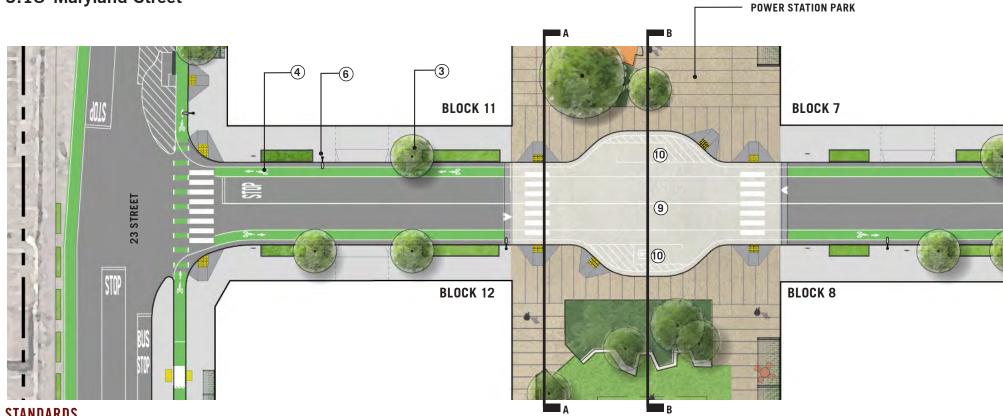

STANDARDS

5.18.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figure 5.18.2, Figure 5.18.3, Figure 5.18.4, and Figure 5.18.5.

5.18.2 Tree Well Size

Tree wells shall be at least five feet by eight feet.

5.18.3 Tree Well Surfacing

Tree wells shall have crushed stone without stabilizer. Planting in tree wells is allowed.

5.18.4 Raised Pedestrian Crossing


Between the two blocks of Power Station Park, a twoinch-raised concrete pedestrian crossing shall be included in the street design. The crossing will be separated from the pedestrian sidewalk by a minimum four-inch curb.


GUIDELINES


5.18.5 Lighting


Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.


Figure 5.18.1 Maryland Street Plan

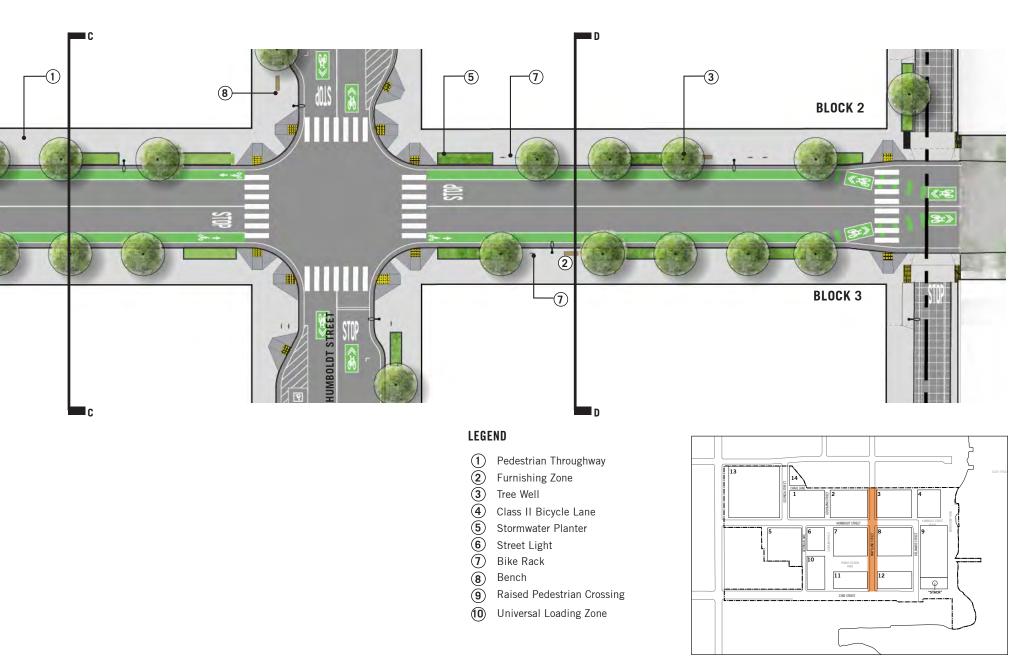

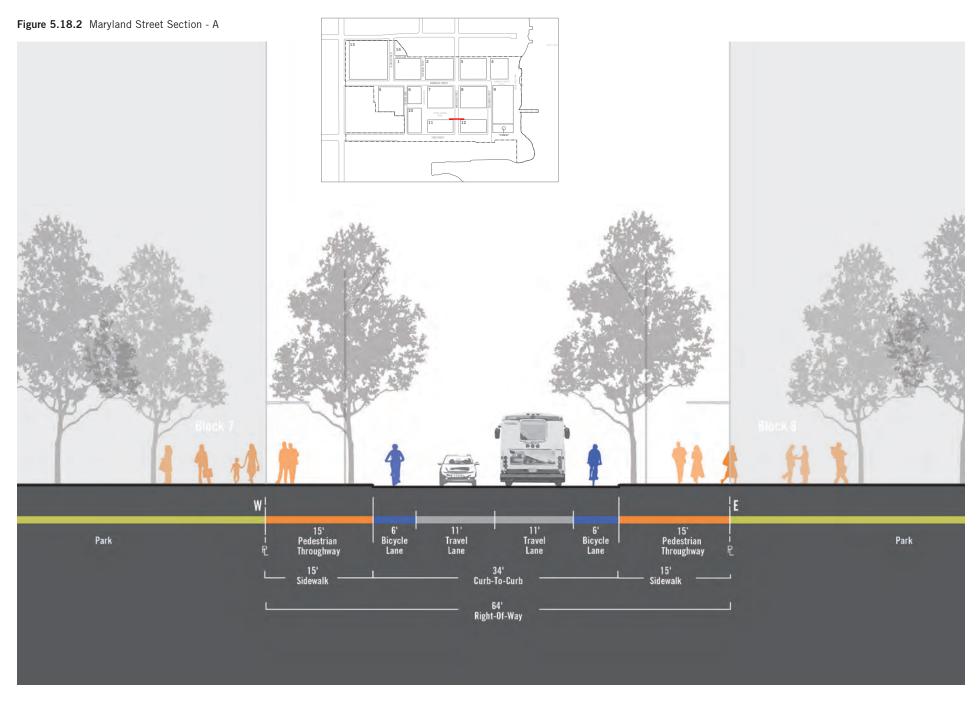


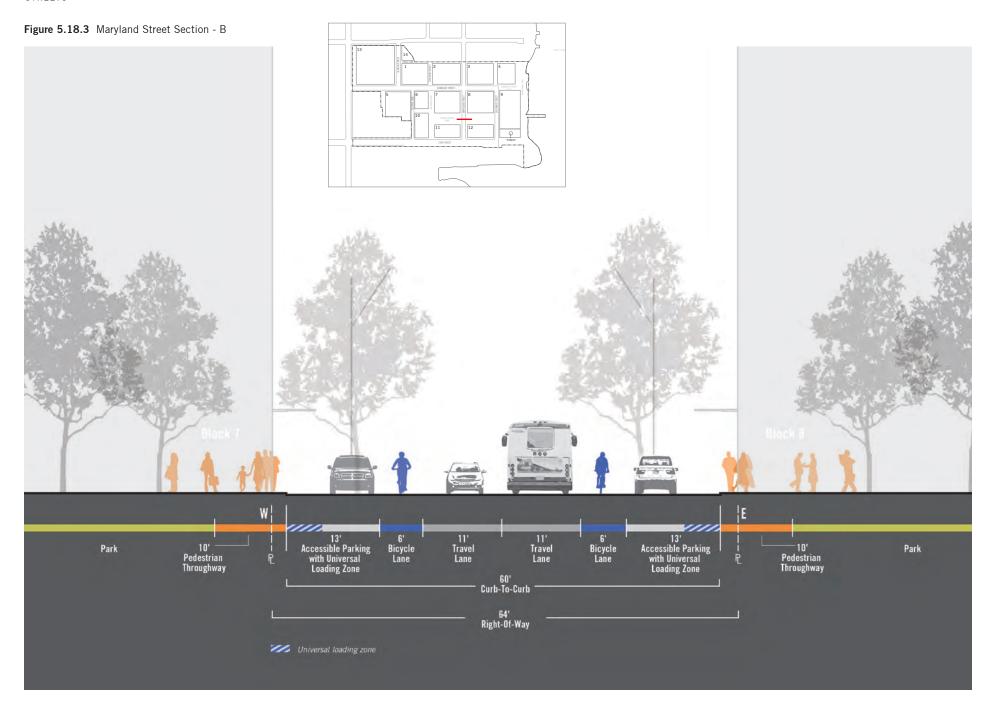

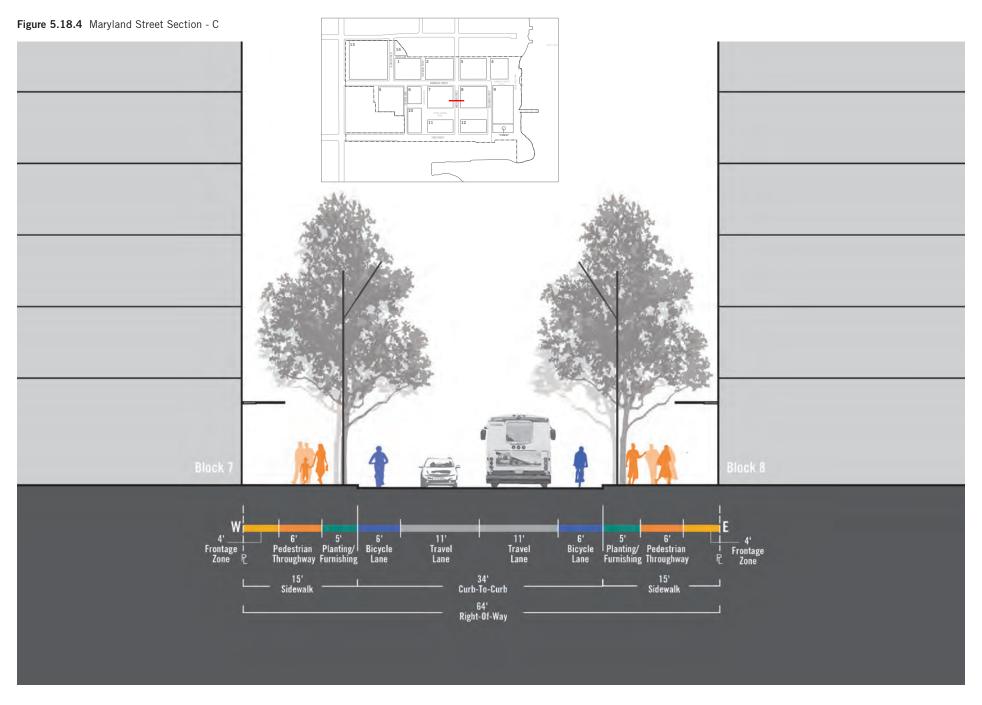

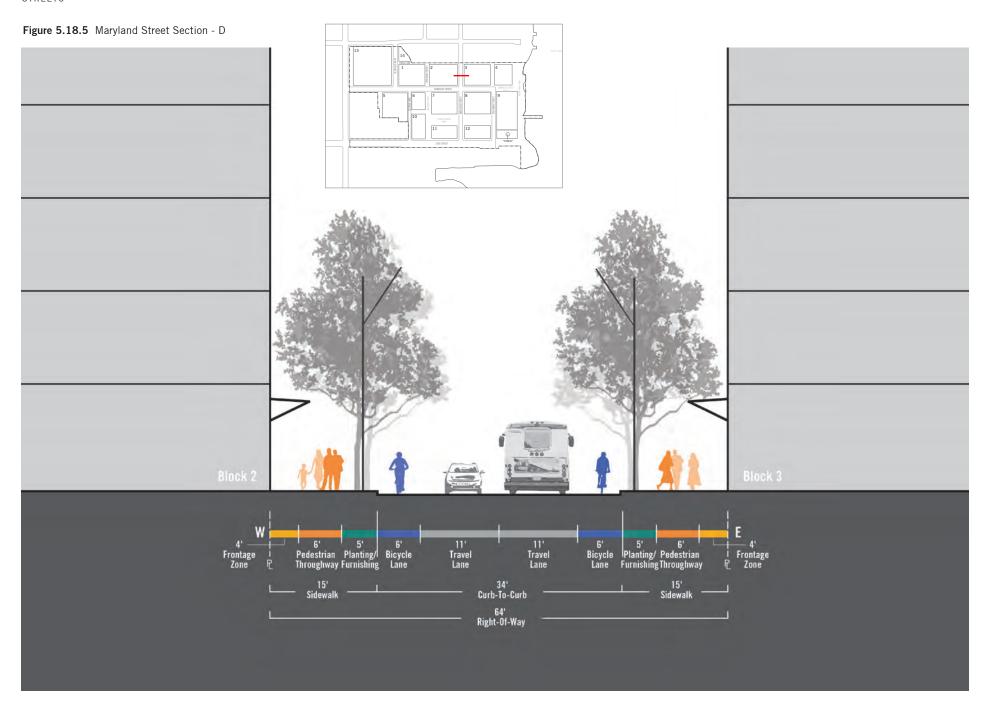

5.19 Humboldt Street

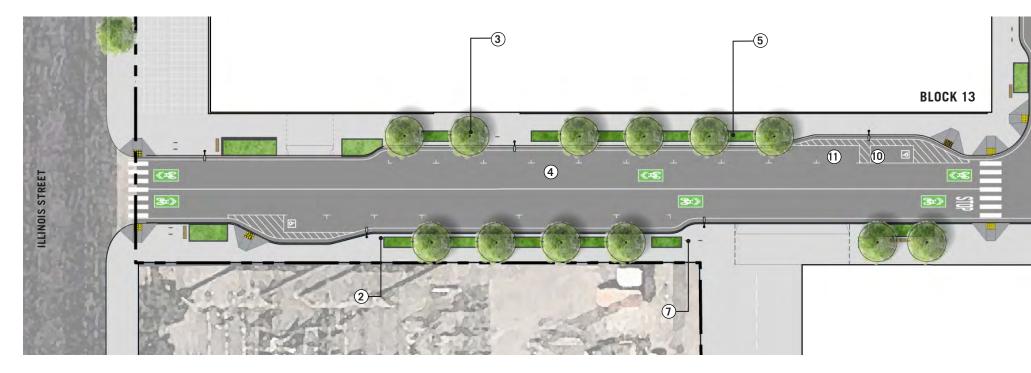

STANDARDS

5.19.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street section shown in Figure 5.19.3.

5.19.2 Tree Well Size

Tree wells shall be at least five feet by eight feet.

5.19.3 Tree Well Surfacing

Tree wells shall have crushed stone without stabilizer. Planting in tree wells is allowed.

5.19.4 Raised Pedestrian Crossing


At the intersection of Louisiana Street and Humboldt Street, a two-inch-raised concrete pedestrian crossing shall be included in the street design. The crossing will be separated from the pedestrian sidewalk by a minimum four-inch curb.

GUIDELINES

5.19.5 Lighting

Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.

Figure 5.19.1 Humboldt Street Plan

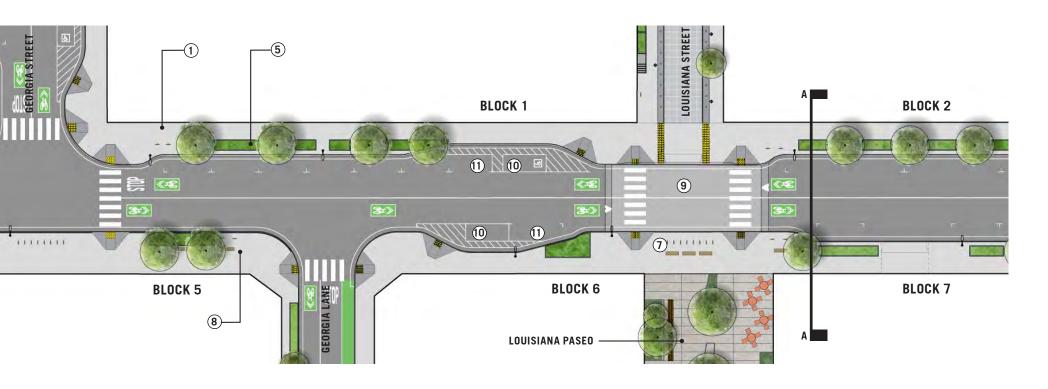

- Pedestrian Throughway
- ② ③ Furnishing Zone
- Tree Well
- Shared Lane Bicycle Route
- (4) (5) (6) (7) Stormwater Planter
- Street Light
- Bicycle Rack
- Bench
- Raised Pedestrian Crossing
- Universal Loading Zone
- Accessible Parking








Figure 5.19.2 Humboldt Street Plan (continued)

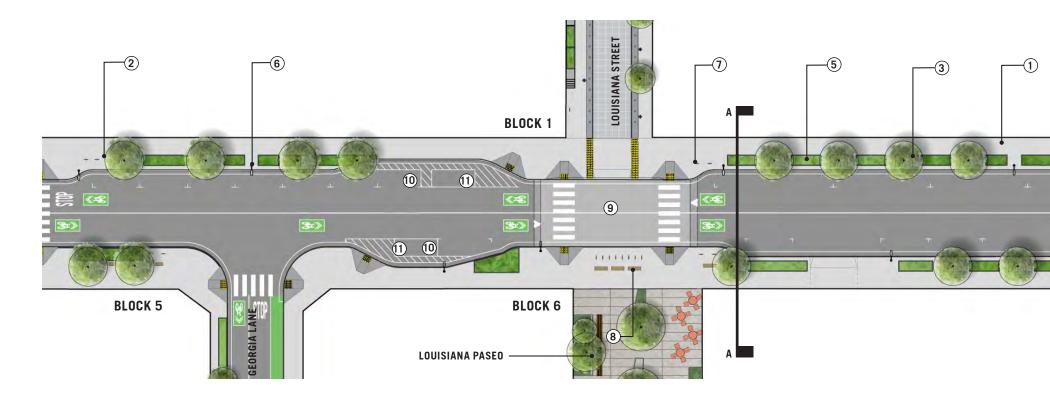

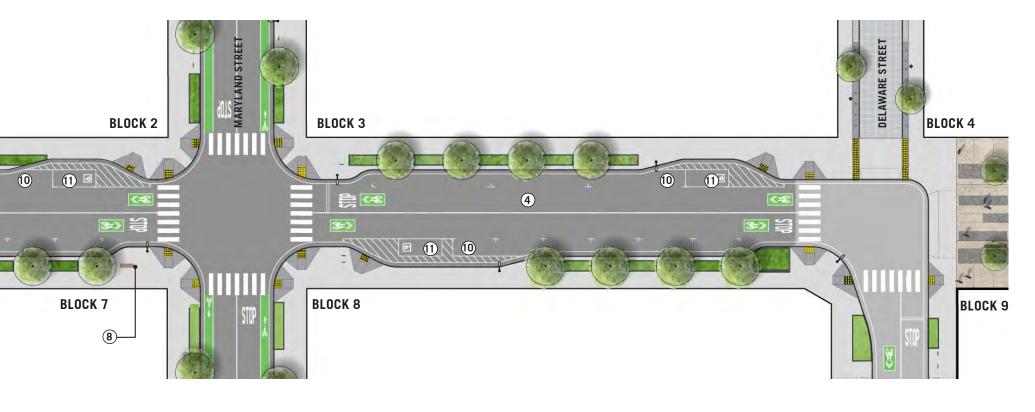

- Pedestrian Throughway
- 2 3 4 5 6 7 Furnishing Zone
- Tree Well
- Shared Lane Bicycle Route
- Stormwater Planter
- Street Light
- Bike Rack
- Bench
- aised Pedestrian Crossing
- Universal Loading Zone
- Accessible Parking



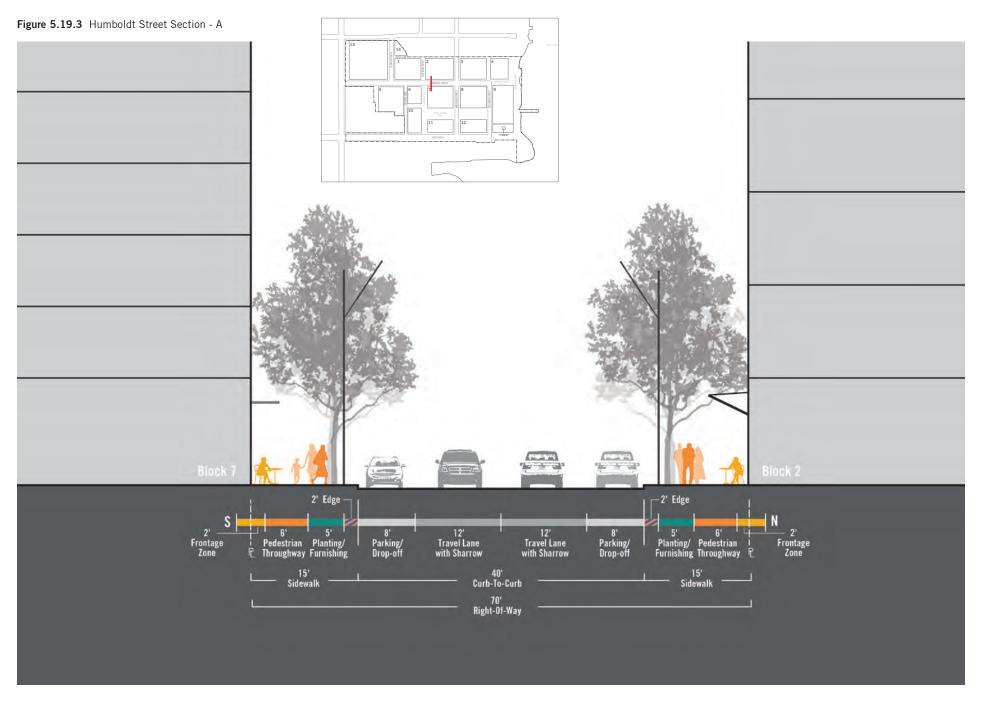


STREETS

[This page intentionally left blank.]

5.20 Georgia Street

Figure 5.20.1 Georgia Street Plan

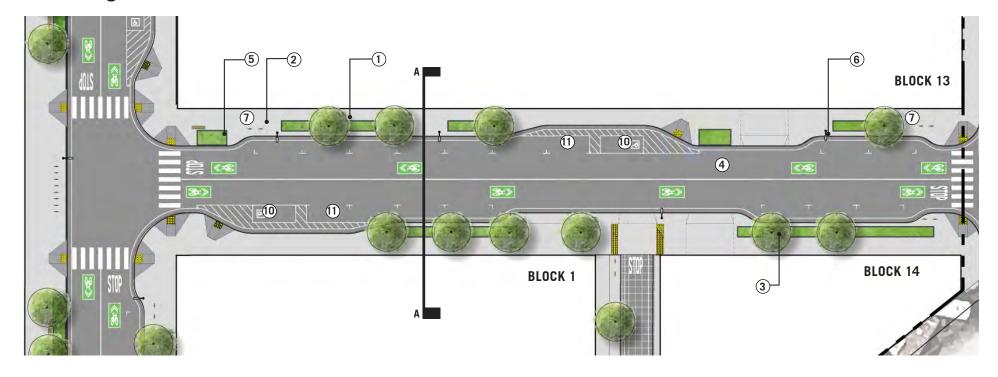

STANDARDS

5.20.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figure 5.20.2.

5.20.2 Tree Well Size

Tree wells shall be at least five feet by eight feet.

5.20.3 Tree Well Surfacing

Tree wells shall have crushed stone without stabilizer. Planting in tree wells is allowed.


GUIDELINES

5.20.4 Lighting

Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.

- 1 Pedestrian Throughway
- 2 Furnishing Zone
- 3 Tree Well
- 4 Shared Lane Bicycle Route
- 5 Stormwater Planter
- 6 Street Light
- Bicycle Rack
- 8 Bench
- **9** Raised Pedestrian Crossing
- (10) Universal Loading Zone
- (1) Accessible Parking

Figure 5.20.2 Georgia Street Section - A

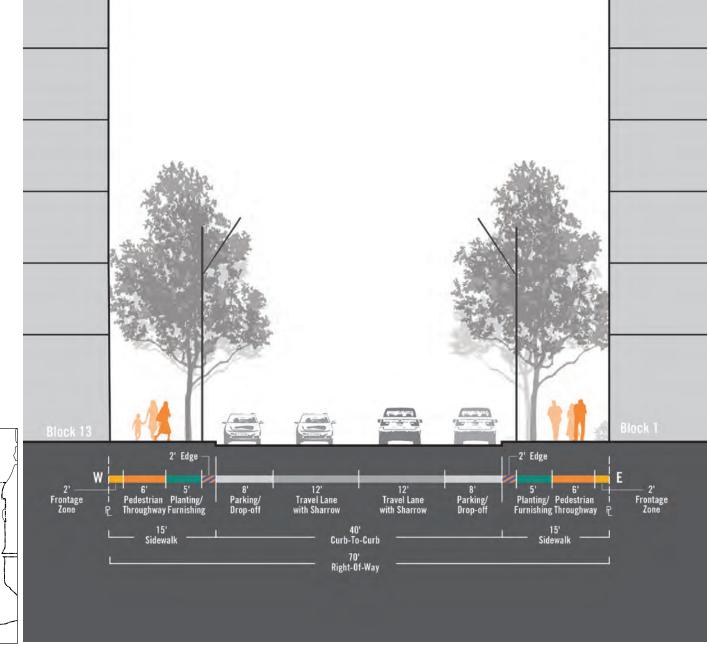

5.21 Georgia Lane

Figure 5.21.1 Georgia Lane Plan



STANDARDS

5.21.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figures 5.21.2 and 5.21.3.

5.21.2 Tree Well Size

Tree wells shall be at least three feet and six inches by eight feet.

5.21.3 Raised Pedestrian Crossing

At mid-block, where Louisiana Paseo opens to Georgia Street, a two-inch-raised concrete pedestrian crossing shall be included in the street design. The crossing will be separated from the pedestrian sidewalk by a minimum four-inch curb.


GUIDELINES

5.21.4 Lighting

Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.


- 1 Pedestrian Throughway
- (2) Furnishing Zone
- **3** Tree Well
- 4) Class II Bicycle Lane
- 5) Shared Lane Bicycle Route
- Stormwater Planter
- 7) Street Light
- 8) aised Pedestrian Crossing


Figure 5.21.2 Georgia Lane Section - A 6' 9' i Bicycle Pedestrian Lane Throughway P 10' Travel Lane with Sharrow 10' Travel Lane 26' Curb-To-Curb 43' Right-Of-Way



POTRERO POWER STATION Design for Development – DRAFT: October 3, 2018

Figure 5.21.3 Georgia Lane Section - B

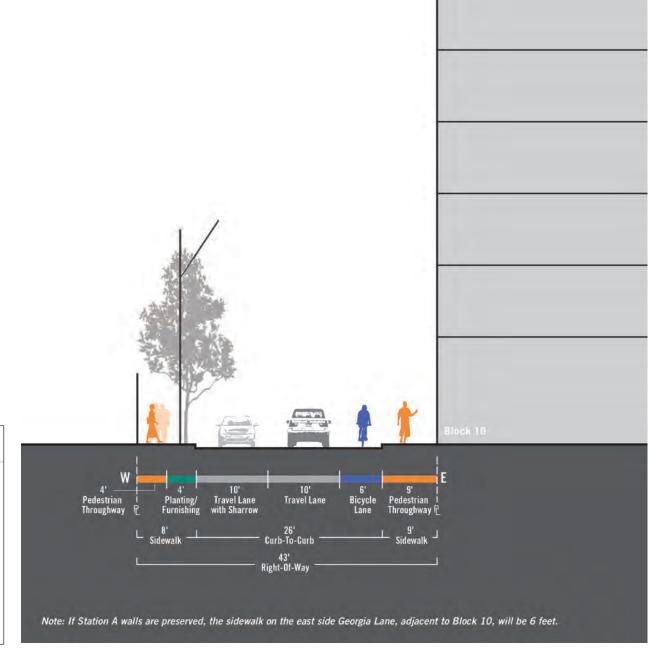




STREETS

[This page intentionally left blank.]

5.22 Delaware Street

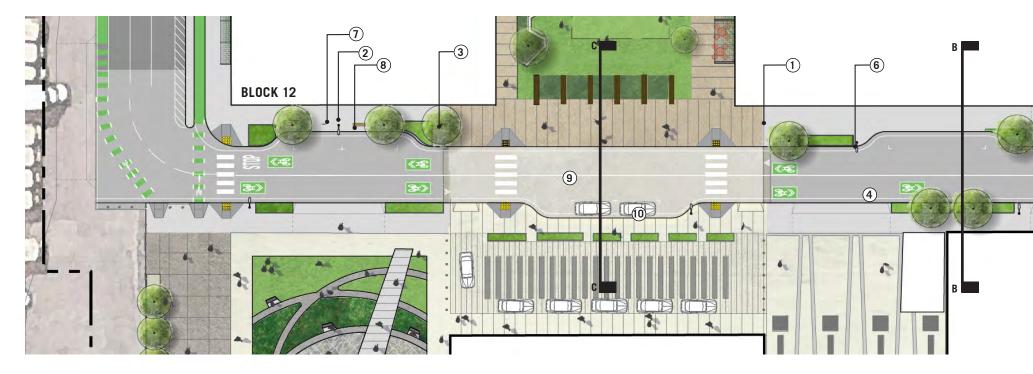

STANDARDS

5.22.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figures 5.22.2 through 5.22.4.

5.22.2 Roadway Materials

Delaware Street shall be paved with concrete between 23rd Street and Humboldt Street. Enhanced finishes and custom score patterns may be used.

5.22.3 Tree Well Size

Tree wells shall be at least five feet by eight feet.

5.22.4 Tree Well Surfacing

Tree wells shall be planted. Crushed stone without stabilizer in tree wells is allowed.

5.22.5 Bollards

Bollards shall be placed at minimum five feet on-center along the center of the detectable warning paver strip if a curb is not provided instead.


5.22.6 Raised Pedestrian Crossing


Between Power Station Park and Unit 3, a two-inchraised concrete pedestrian crossing shall be included in the street design. The crossing will be separated from the pedestrian sidewalk by a minimum four-inch curb.

- 1) Pedestrian Throughway
- **2** Furnishing Zone
- 3 Tree Well
- 4 Shared Lane Bicycle Route
- 5 Stormwater Planter
- 6 Street Light
- Bike Rack
- 8 Bench
- 9 aised Pedestrian Crossing
- (10) Passenger Loading Zone
- (1) Accessible Parking

Figure 5.22.1 Delaware Street Plan

Figure 5.22.2 Delaware Street Section - A

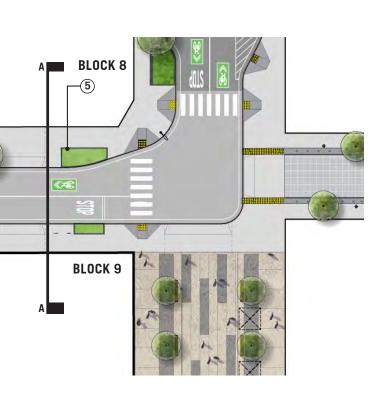



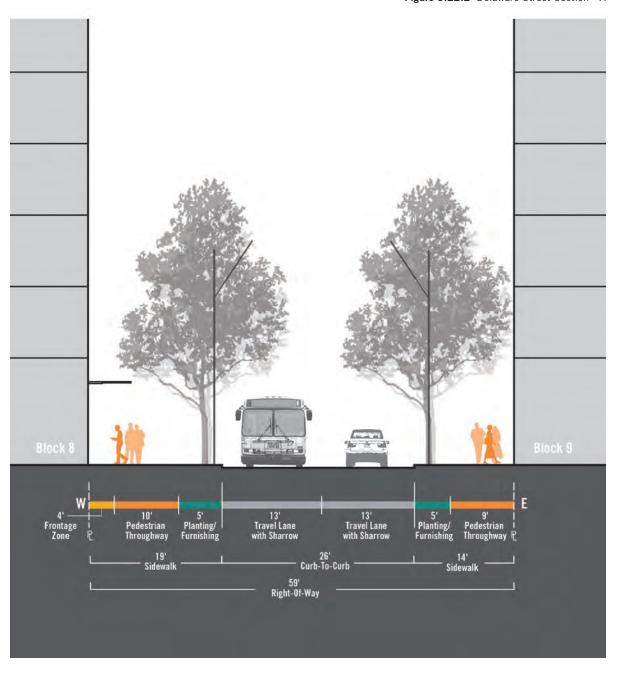
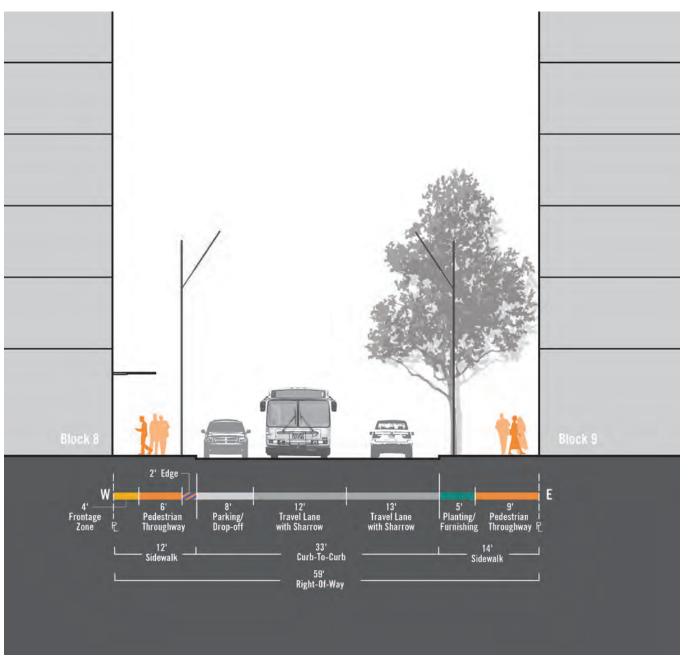



Figure 5.22.3 Delaware Street Section - B






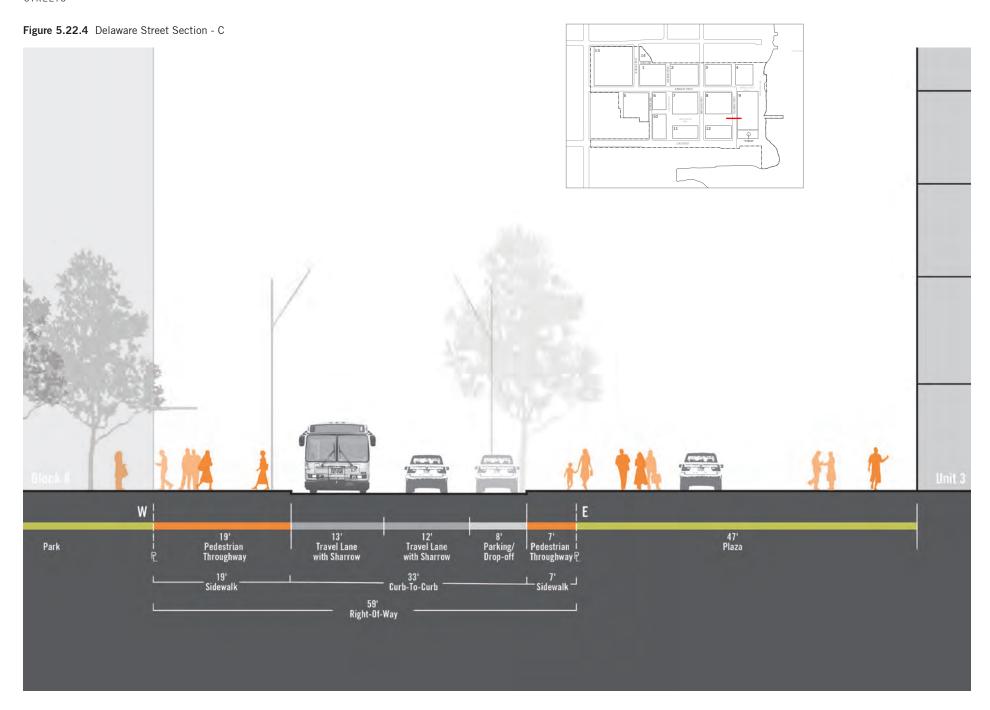


Figure 5.22.5 Delaware Street Plan (continued)

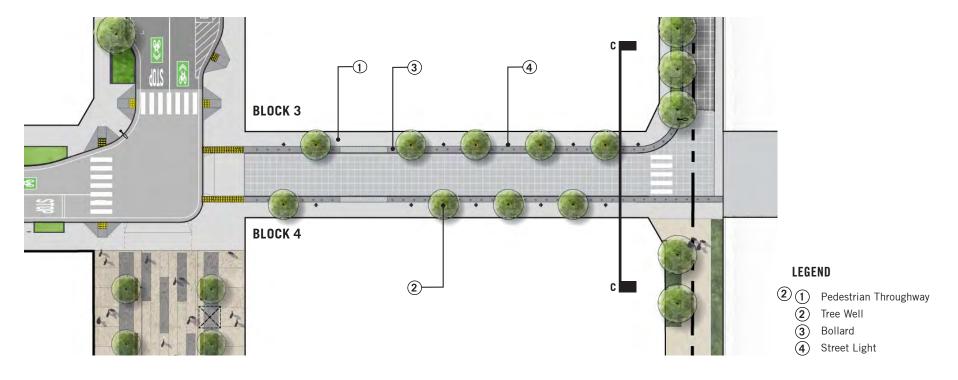

STANDARDS

Below standards apply to section of Delaware Street between Humboldt Street and Craig Lane.

5.22.7 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street section shown in Figure 5.21.6

5.22.8 Shared Lane/Vehicular Zone Materials

Shared lanes shall be paved with enhanced cast in place concrete, unit pavers, or permeable unit pavers.

5.22.9 Detectable Warning Pavers

A three-foot-wide strip of detectable warning pavers shall separate the Pedestrian Throughway from the shared

lanes. Detectable warning pavers shall be alternate colors/materials as shown in Figure 5.16.2

5.22.10 Bollards

Bollards shall be placed at minimum five feet on-center along the center of the detectable warning paver strip if a curb is not provided instead.

5.22.11 Tree Well Size

Tree wells shall be at least four feet by six feet minimum.

5.22.12 Tree Well Surfacing

Tree wells shall have tree grates that comply with pedestrian accessibility standards.

GUIDELINES


5.22.13 Lighting

Lighting design shall integrate roadway lighting with pedestrian level lights in order to create a safe environment and a varied visual experience.

Lighting design shall feature pedestrian pole lights or lighted bollards, as appropriate

5.22.14 Stormwater Treatment

If surface stormwater treatment planters are not feasible, a structural cell system for tree planting and/ or permeable concrete unit pavers may be used to treat stormwater runoff.




CONSIDERATIONS


5.22.15 Thermal Energy Plant Piping Connection

The project may elect to construct shared thermal energy plants, if the Project Sponsor determines that such system would be feasible. Such a system would use shared thermal energy plants within the project site, to recover waste heat from commercial buildings for heating and cooling use in residential buildings, to reduce the project's overall energy and water demands. If feasible, utilities related to this system including an insulated pipe connection shall be provided under the private portion of Delaware Street, between Blocks 3 and 4.

Figure 5.22.6 Delaware Alley Section - C

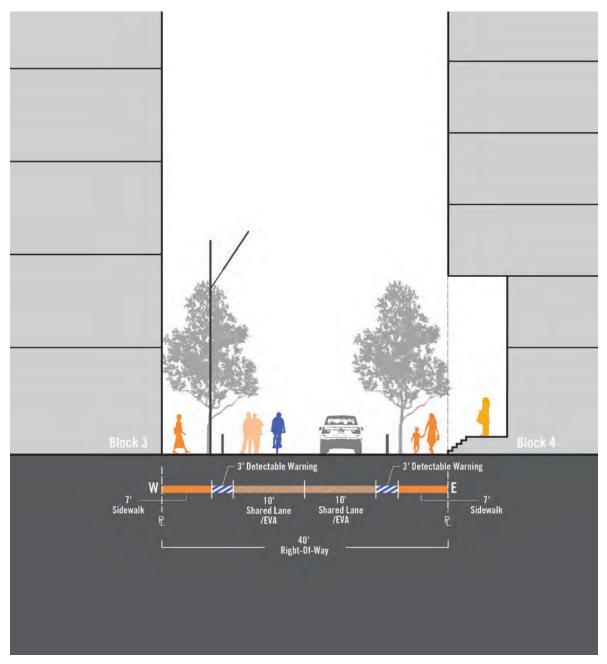

5.23 Louisiana Street

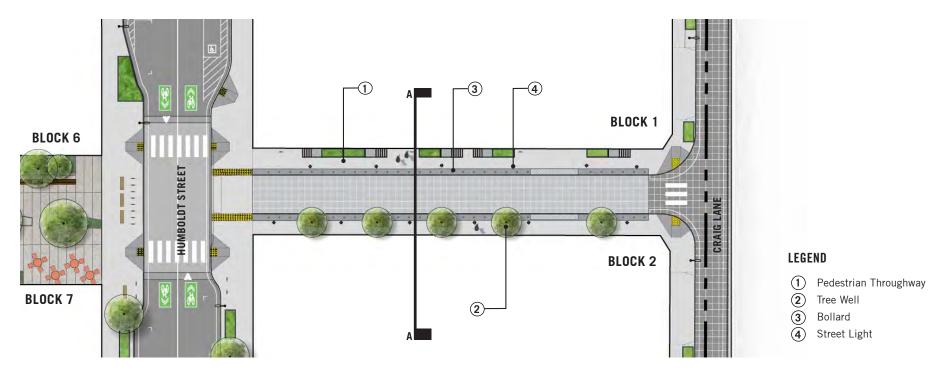

STANDARDS

5.23.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figure 5.22.2.

5.23.2 Pedestrian Throughway Materials

The Pedestrian Throughway, shall be an accessible path of travel that is unobstructed and ADA-compliant. Paving material shall be enhanced cast in place concrete and/or unit pavers.

5.23.3 Shared Lane/Vehicular Zone Materials

Shared lanes shall be paved with enhanced cast in place concrete, unit pavers, or permeable unit pavers.

5.23.4 Detectable Warning Pavers

A three-foot wide strip of detectable warning pavers shall separate the Pedestrian Throughway from the shared lanes. Detectable warning pavers shall be alternate colors/materials as shown in Figure 5.16.2.

5.23.5 Bollards

Bollards shall be placed at minimum five feet on-center along the center of the detectable warning paver strip if a curb is not provided instead.

5.23.6 Tree Well Size

Tree wells shall be at least four feet by six feet.


5.23.7 Tree Well Surfacing

Tree wells shall have tree grates that comply with pedestrian accessibility standards.

GUIDELINES

5.23.8 Residential Stoops

A four-foot encroachment zone is allowed but not required along the west side of the Louisiana Street shared public way . Stoops and stairs related to residential entries are allowed but not required in this zone.

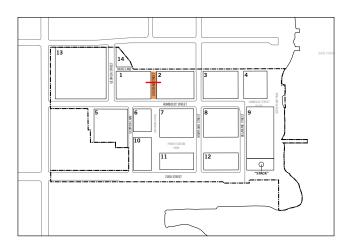

5.23.9 Lighting

Lighting design shall feature pedestrian pole or lighted bollards, as appropriate.

5.23.10 Stormwater Treatment


If surface stormwater treatment planters are not feasible, a structural cell system for tree planting and/ or permeable concrete unit pavers may be used to treat stormwater runoff.

CONSIDERATIONS


5.23.11 Thermal Energy Plant Piping Connection

The project may elect to construct shared thermal energy plants, if the Project Sponsor determines that such system would be feasible. Such a system would use shared thermal energy plants within the project site to recover waste heat from commercial buildings for heating and cooling use in residential buildings to reduce the project's overall energy and water demands. If feasible, utilities related to this system, including an insulated pipe connection, shall be provided under the private portion of Louisiana Street, between Blocks 1 and 2.

Figure 5.23.2 Louisiana Street Section - A

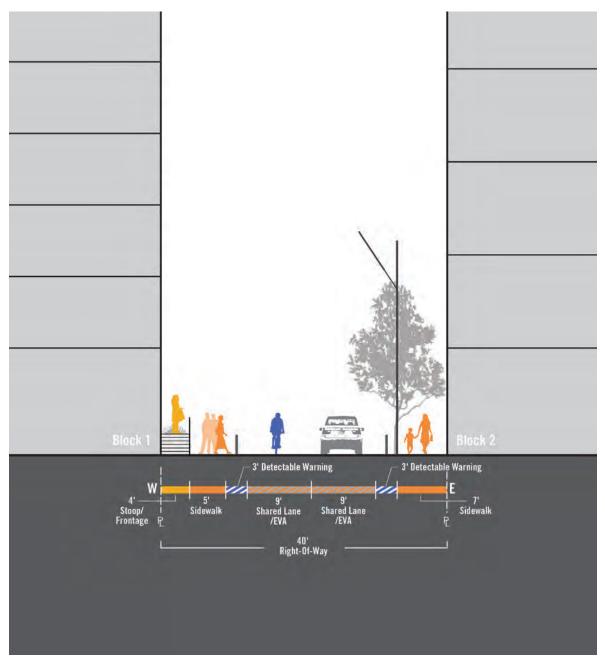

5.24 Craig Lane

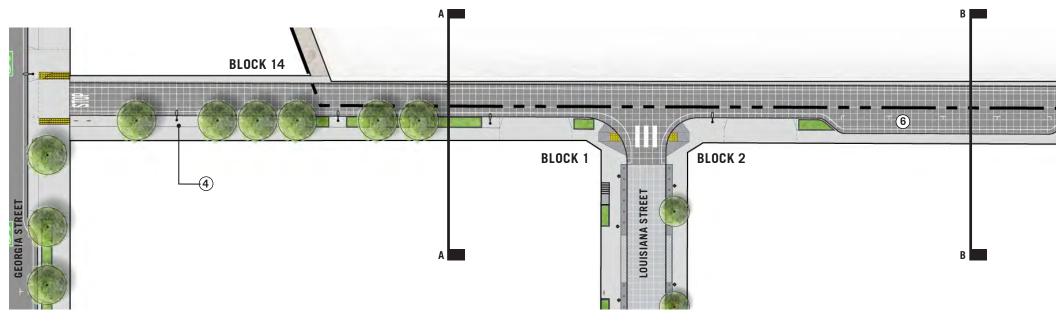

STANDARDS

5.24.1 Street-Lane and Sidewalk Widths

The widths of street lanes and sidewalks shall be per street sections shown in Figure 5.24.2 and Figure 5.24.3.

5.24.2 Tree Well Size

Tree wells shall be at least five feet by eight feet.

5.24.3 Tree Well Surfacing

Tree wells shall be planted with a diverse mix of ornamental grasses, small woody shrubs and herbaceous perennials. Alternate tree surfacing: crushed stone - non-stabilized.


5.24.4 Pedestrian Throughway Materials

The Pedestrian Throughway, shall be an accessible path of travel that is unobstructed and ADA-compliant. Paving material shall be SFDPW standard cast-in-place concrete.

5.24.5 Furnishing Zone Materials

Furnishing Zone shall be DPW standard cast-in-place concrete.

Figure 5.24.1 Craig Lane Plan

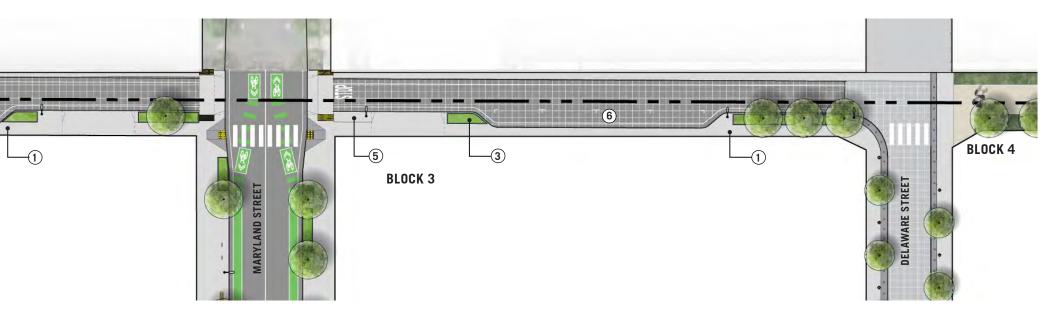

LEGEND

- Pedestrian Throughway
- Tree Well
- Stormwater Planter
- **2 3 4 5 6** Street Light
- Bicycle Rack
- Commercial Loading Zone

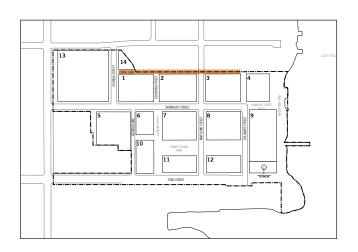
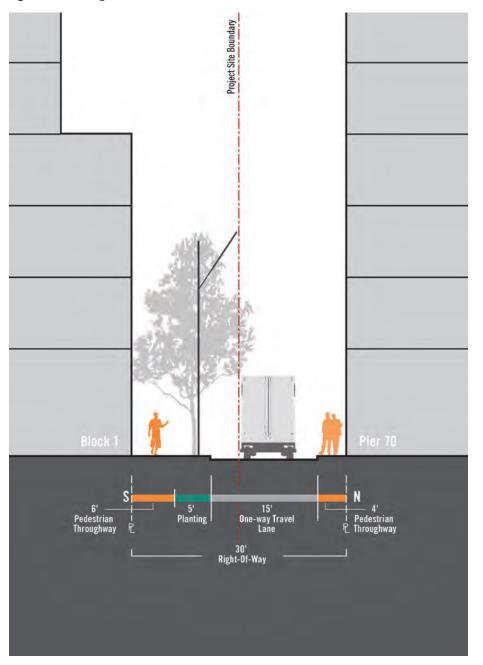


Figure 5.24.2 Craig Lane Section - A









Figure 5.24.3 Craig Lane Section - B

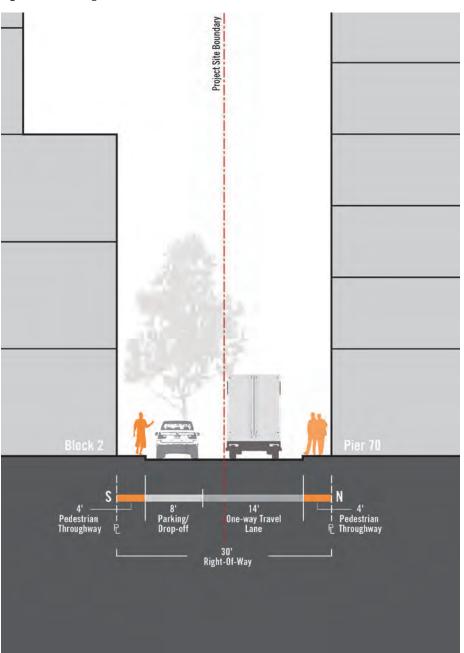



5.25 22nd Street


Figure 5.25.1 22nd St Section - A

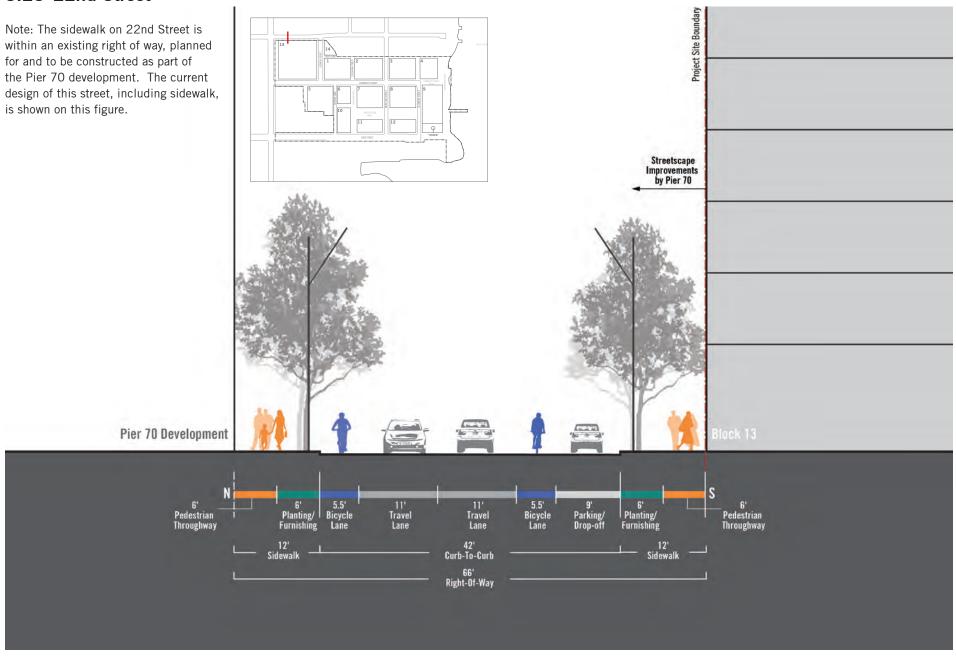

5.26 Illinois Street

Figure 5.26.1 Illinois St Section - A


Note: The sidewalk on Illinois Street is within an existing right of way, and will be replaced with the Power Station development. The existing design of this street, including sidewalk, is shown on this figure.

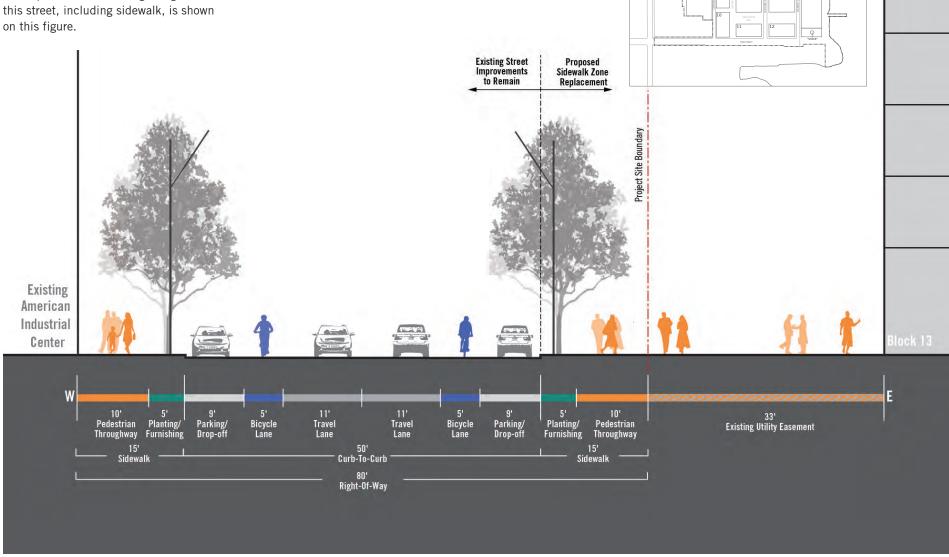



Section 6 **BUILDINGS**

Urban Form			Design Context			Building Experience and Operations		
6.1	Density Controls	234	6.9	Ground Floor Design	264	6.17	Sustainable Buildings and Human Wellness	282
6.2	Building Height	236	6.10	Key Frontages and Corners	266	6.18	Building Rooftops	287
6.3	Block Size	239	6.11	Third Street Industrial District Frontages	268	6.19	Off-Street Parking and Loading	289
6.4	Building Setbacks	241	6.12	Existing Buildings within the Third Street		6.20	Bicycle Parking	293
6.5	Upper Building Controls	244		Industrial District: The Stack	271	6.21	District Parking Garage	296
Architecture		6.13	Existing Buildings within the Third Street Industrial District: Unit 3	272				
6.6	Building Modulation	252	6.14	Park Frontages	274			
6.7	Façade Articulation	259	6.15	Residential Character	276			
6.8	Color and Materials	260	6.16	Active Use Character	278			

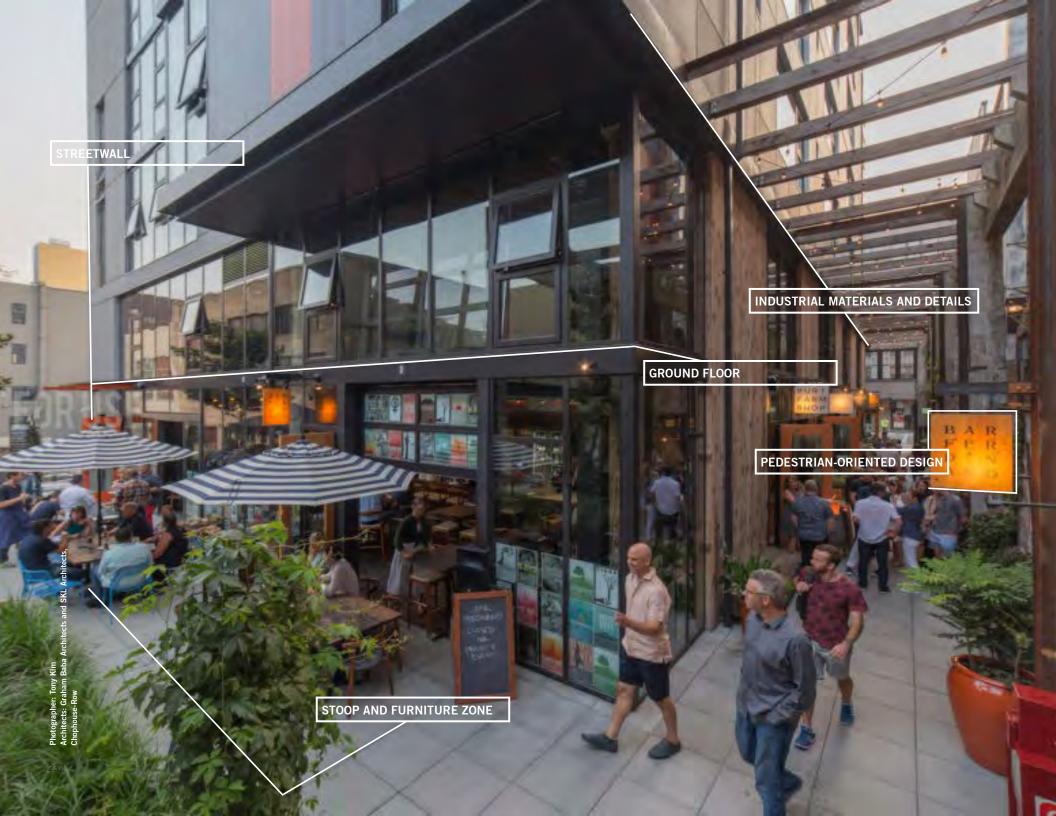

Urban Form

Urban form at the Power Station prioritizes the pedestrian experience, providing a framework for organizing a neighborhood's buildings, streets, and open space to enhance walkability.

The Power Station prioritizes the pedestrian experience, not only with gracious sidewalks and ample open spaces, but also with thoughtful urban form and architecture. With respect to buildings, three main factors contribute to walkability: (1) building mass and bulk; (2) block size and scale; and (3) visual interest created by architectural modulation, articulation, and materiality. To be meaningful, these three elements bust be contextual, paying mind to a building's location, use, and typology.

As with many new developments in San Francisco, at the Power Station, no residential dwelling unit density limit or maximum floor area ratio applies. Density is instead regulated by a building's bulk and mass, including height, required setbacks, as well as maximum plan, diagonal, and apparent face dimensions. Such controls allow for a varied urban form that steps down towards the waterfront, human-scaled streetwalls, and buildings that do not appear overwhelmingly massive.

New buildings at the Power Station generally fall into four categories:

Lowrise buildings (Blocks 4, 9, 12, 13, and 14) –
 Buildings up to 95 feet in height;

- Midrise buildings (Blocks 2, 3, 8, 10, and 11) –
 Buildings between 96 and 125 feet in height:
- Midrise towers (Blocks 1, 5, and 7) Buildings between 126 and 180 feet in height;
- Highrise tower (Block 6) Building between 181 feet and 300 feet in height.

Block 9 would include a midrise tower should Unit 3 be retained.

All buildings are required to provide a Building Setback at specified heights (Section 6.4). The portion of the building between sidewalk grade up to this required Building Setback forms the Streetwall (Section 6.4.3).

Buildings taller than 125 feet (i.e., midrise towers and the highrise tower permitted on Block 6) are comprised of two parts: (1) the Base and (2) the Upper Building (Section 6.2).

6.1 Density Controls

STANDARDS

6.1.1 Application of Bulk Controls

No bulk controls except for Building Setbacks (Section 6.4) shall apply to buildings less than 126 feet in height (except for Block 9 without Unit 3, where an additional bulk control applies). Otherwise, bulk controls only apply to the Upper Building, the portion of the building that rises above the Base of midrise towers (as permitted on Blocks 1, 5, and 7) and the highrise tower as permitted on Block 6.

6.1.2 Form-Based Controls

No residential dwelling unit density limit or maximum floor area ratio shall apply within the PPS-MU zoning district. Density is instead regulated by height, required setbacks, exposure, and open space of each development block.

6.1.3 Dwelling Unit Exposure

All dwelling units shall face onto a public or private rightof-way, or onto an open area, defined as:

- A public street, publicly accessible alley, or mid-block passage (public or private) at least 20 feet in width.
 See Figure 6.1.1.
- An outer court or terrace that is open to a public street, public alley, mid-block alley (public or private), or public open space and at least 25 feet in width. See Figure 6.1.1.
- An inner court at least 35 feet in width in every horizontal dimension, with adjacent walls up to a height of 35 feet. See Figure Figure 6.1.2.
- An inner court with a wall height greater than 35 feet is permitted provided that at least one horizontal dimension is equal to or longer than the shortest

vertical dimension of the open area, and no horizontal dimension is less than 15 feet. See Figure 6.1.2.

6.1.4 Usable Open Space

Usable open space is defined as an outdoor area or areas designed for outdoor living, recreation or landscaping, including such areas on the ground and on decks, balconies, porches and roofs, which are safe, suitably surfaced and screened. Private open space is defined as an area or areas private to and designed for use by only one dwelling unit. Common open space shall mean an area or areas designed for use jointly by two or more dwelling units. Usable open space requirements shall be met by providing the building-wide equivalent of (i) 36 square feet of private open space per dwelling unit or (ii) 48 square feet of common open space per dwelling unit.

A) Common Open Space

Spaces including but not limited to courtyards, rooftop terraces, decks and/or porches shall count towards the provision of usable open space. Mid-block alleys may also count as common open space. Such open space shall have a minimum 10 feet in horizontal dimension to be counted against the requirement of 48 square feet of common open space per dwelling unit.

B) Private Open Space

Spaces including but not limited to setback areas, balconies, and/or decks shall count towards the provision of usable open space. Such open space shall have a minimum dimension of six feet in horizontal dimension to be counted against the requirement of 36 square feet or private open space per dwelling unit.

Private open space shall be directly accessible from the dwelling unit it serves.

6.1.5 Block 9 without Unit 3 Density

For deference to the iconic Stack, and to create more physical space between the Stack and new construction, the building of Block 9 without Unit 3 shall be designed such that the overall bulk is reduced by at least ten percent from the maximum permitted floor area , with a focus along the southern façade of the new building facing the Stack. A potential distribution of bulk reduction, for example, could result in an eight percent reduction along the southern façade with a two percent reduction elsewhere. (See Figure 6.4.5 for required ground floor setback requirements.)

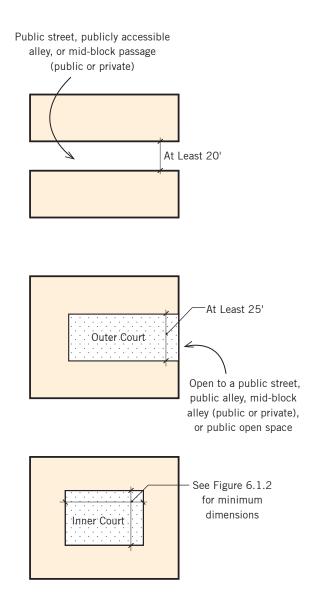


Figure 6.1.1 Dwelling Unit Exposure

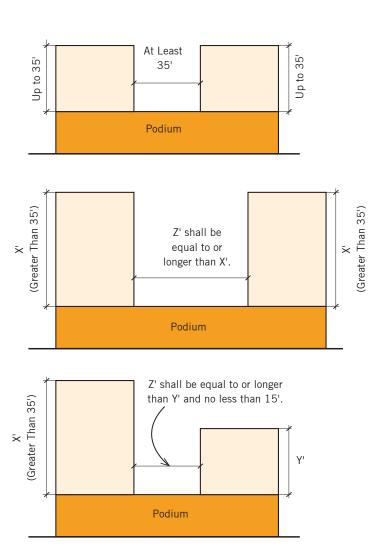


Figure 6.1.2 Minimum Width of Inner Courts

6.2 Building Height

STANDARDS

6.2.1 Height of Existing Structures

The height limit for Unit 3 and the Stack have been established at their existing heights. In the event that the Stack collapses or is otherwise damaged beyond repair due to a seismic event or other casualty, the 300-foot height limit shall not be applicable to a new structure. Rather, the area of land currently improved with the Stack shall be used as open space. Should Unit 3 be demolished, the height limit for Block 9 would be 65 feet.

6.2.2 Maximum Height

Maximum height limits establish a neighborhood fabric that is sculpted, with heights generally stepping down as one approaches the waterfront.

The height of buildings shall not exceed the applicable maximum heights shown in Figure 6.2.3. Where two heights are separated by a "/", the lower height reflects the limit permitted for the Base or podium, while the taller height reflects the limit permitted for the Upper Building, which are defined as follows:

A) Base (Podium)

The Base is the lower portion of a midrise or highrise tower that extends vertically to a height of up to 90 feet. See Figure 6.2.2.

B) Upper Building (Tower)

The Upper Building (commonly referred to as the "tower"), is the portion of a midrise or highrise tower above the Base. See Section 6.5 for Upper Building controls.

6.2.3 Measuring Height

Height limits are to be measured from the back of sidewalk grade, at the center line of the building face, determined by the length of building frontage, to the highest point of the uppermost structural slab of the building for a flat roof, or to the average height of the sloped roof, in the case of a roof that is pitched, stepped, or similarly sculpted.

In the case of sloped blocks, height limits shall be measured at the center line of the building from the back of sidewalk grade of the higher property line. (See Figure 6.2.1). Such point shall be used for height measurement for a lot depth not extending beyond the midpoint line of the block. Measurement of height for any portion of the block extending beyond such a line shall be measured from finished grade at the centerline of the lot of the down-sloping portion of the block.

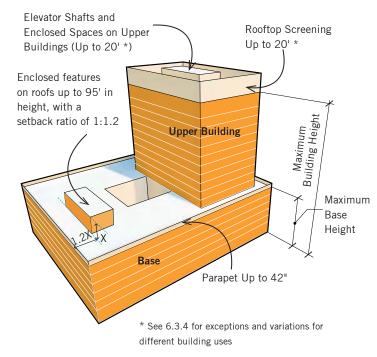


Figure 6.2.1 Maximum Building Height and Base Height

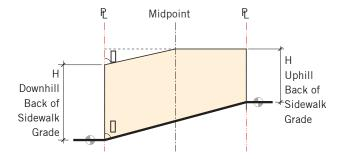


Figure 6.2.2 Measuring Height on a Slope

Figure 6.2.3 Building Height Plan



STANDARDS

6.2.4 Height Exemptions

The features listed in *Planning Code Section 260(b)* (1) and those below shall be exempt from height limits established within Figure 6.2.3 Building Height Plan, and provided that the sum of the horizontal areas of said features do not exceed 40 percent of the Rooftop Area, as defined in the Glossary.

- Elevator shafts up to 20 feet in height for buildings taller than 120 feet in height.
- Enclosed space containing certain principal Retail, Sales and Service Uses (limited to Bar, Tourist Oriented Gift Store, Specialty Grocery, Gym, Liquor Store (to allow for wine tasting), Limited Restaurant, General Restaurant, Instructional Service, Personal Service); and/or certain Entertainment, Arts, and Recreation Use (limited to Arts Activities, General Entertainment, Nighttime Entertainment), and/or Childcare Facility (or uses accessory to a Childcare Facility) and not to exceed 16 feet in height on the roof of predominantly non-residential buildings. Such enclosed space shall not exceed 5,000 square feet and be accompanied with a Publicly Accessible Open Space at a ratio of 1:1.
- For a building containing predominantly Hotel use, certain accessory Retail, Sales and Service Uses (limited to Bar, Tourist Oriented Gift Store, Specialty Grocery, Gym, Liquor Store (to allow for wine tasting), Limited Restaurant, General Restaurant, Instructional Service, Personal Service, Retail); and/or certain Entertainment, Arts, and Recreation Uses (limited to Arts Activities, General Entertainment, Nighttime Entertainment,) not to exceed 16 feet in height on

the roof. Such enclosed space shall not exceed 5,000 square feet.

- Enclosed restrooms that are no more than 25 square feet and do not exceed a height of 10 feet.
- Enclosed space related to the recreational use of the roof, not to exceed 16 feet in height.
- Rooftop screening for features listed in *Planning Code Section 260(b)(1)* and *260(b)(2)* and those contained in this height exemptions subsection not to exceed 10 percent of the total height of the building on Block 6, provided that the additional height adds to the sense of slenderness and visual interest to the termination of the building. For all other buildings such screening shall not exceed a height of 20 feet on Upper Buildings, and 10 feet on roof surfaces up to 95 feet in height.
- Vertical extensions to buildings, such as spires, which enhance the visual appearance of the structure and are not used for human occupancy up to 75 feet above the permitted height on highrise towers. The extension shall be less than 100 square feet in crosssection and 18 feet in diagonal dimension.

For the portion of a building before the required Building Setback pursuant to Section 6.4, all exempted features that do not extend vertically (such as parapets, railings, and rooftop screening no taller than 42 inches) from the building face must be set back at least five feet from the building edge. Additionally, enclosed or screened features 10 feet or taller on any roof at or below 95 feet in height shall be set back one foot for every 1.2 feet of height of said feature (see Figure 6.2.1). No required setback of such rooftop features shall apply to roofs above 95 feet in height.

The features listed in *Planning Code Section 260(b)* (2) and those below shall be exempt from height limits established within the Building Height Plan without regard to their horizontal area, provided the limitations indicated for each are observed.

- Panels or devices for the collection of solar or wind energy that lie flat upon the roof surface or are otherwise below the building's parapet.
- Tables, fire pits, bars, umbrellas, lighting, canopies, trellises, and other items intended for the habitable use of the rooftops that do not exceed a height of 10 feet.
- · Soccer goal posts.
- Lighting required for nighttime enjoyment of rooftop soccer fields, not to exceed 60 feet in height.
- Fencing, netting, or other semi-transparent enclosure necessary for the safe enjoyment of unroofed recreation facilities, such as soccer fields, not to exceed 30 feet in height.

6.3 Block Size

Shorter, walkable blocks increase the permeability of the urban environment and encourage walking. The City of San Francisco generally holds that blocks should be shorter than 300 feet in length, where possible. All of the blocks on site are shorter than 300 feet in length, with the exception of Block 13.

To create more permeability within this block, Block 13 is required to provide at least one mid-block alley compliant with the standards articulated in this section. See Figure A.13 for options for orientation and location of mid-block connectors.

The building on Block 9 without Unit 3 may also exceed 300 feet in length. However, a mid-block alley is not required because the width of the building is substantially less than that of other blocks on site and guidelines for Block 9 with or without Unit 3 require permeability through the building's ground floor, allowing pedestrian access directly through the building from its entrance facing Power Station Park to its entrance facing Waterfront Park.

STANDARDS

6.3.1 Mid-block Alley Location

Block 13, where the block is greater than 300 feet in horizontal dimension, shall provide at least one publicly-accessible mid-block alley for the entire depth of the property, in the north-south direction or the east-west direction, within the zone indicated in Figure A.13.1. No other mid-block alleys are required.

6.3.2 Mid-Block Alley Design

The mid-block alley shall meet the following standards:

- Generally be located as close to the middle portion of the subject block face as possible, perpendicular to the subject frontage and connect to existing adjacent streets and alleys;
- Provide pedestrian access;
- Provide no, limited, or full vehicular access, as specific conditions warrant;
- Have a minimum width of 20 feet, exclusive of those obstructions allowed within setbacks pursuant to *San Francisco Planning Code Section 136*.
- Have a minimum clear walking width of 10 feet free
 of any obstructions in the case of a pedestrian-only
 right-of-way, and dual sidewalks each of not less than
 six feet in width with not less than four feet minimum
 clear walking width in the case of an alley with
 vehicular access;

- Have at least 60 percent of the area of the alley or pathway open to the sky. Obstructions permitted within setbacks pursuant to *Planning Code Section 136* may be located within the portion of the alley or pathway that is required to be open to the sky. All portions of the alley or pathway not open to the sky shall have a minimum clearance height from grade of 15 feet at all points;
- Provide such ingress and egress as will make the area easily accessible to the general public;
- Be provided with appropriate paving, furniture, and other amenities that encourage pedestrian use, and be landscaped;
- Be provided with pedestrian lighting to ensure pedestrian comfort and safety;
- Be free of any changes in grade or steps not required by the underlying natural topography and average grade;
- Be fronted by Active Lane Frontage Uses, as defined in Section 3.2.6 Active Lane Frontages, to the extent feasible as determined by the Project Sponsor.
- Buildings abutting mid-block alleys on Block 13 shall feature Setbacks consistent with those required on minor streets that are 40 feet in width or less, as described in Section 6.4.1 Building Setbacks.

6.3.3 Informational Plaque

Prior to issuance of a permit of occupancy, a plaque shall be placed in a publicly conspicuous location for pedestrian viewing. The plaque shall state the right of the public to pass through the alley and stating the name and address of the owner or owner's agent responsible for maintenance. The plaque shall be of no less than 24 inches by 36 inches in size.

6.3.4 Open Space Requirements

Any non-vehicular portions of such a pathway or alley, including sidewalks or other walking areas, seating areas, or landscaping, are permitted to count toward any open space requirements that permit publicly accessible open space.

CONSIDERATIONS

6.3.5 Multiple Buildings Per Block

Bulk controls will help create buildings that are pedestrian-scaled, visually well proportioned, and do not result in overwhelming mass. Constructing more than one building per block can also help accomplish this goal and is permitted on any block, though more likely on blocks containing predominantly residential uses. If more than one building is constructed on a block where a midrise or highrise tower is allowed, the bulk controls for upper buildings apply to the entire block and not to individual buildings.

6.4 Building Setbacks

STANDARDS

6.4.1 Building Setbacks

At heights specified in Figure 6.2.3, a Setback from the building face is required to ensure that the building defines a distinct Streetwall at a comfortable, humanscaled height.

Except at corners as described in Section 6.4.4, on frontages facing Power Station Park, Louisiana Paseo, Waterfront Park, Humboldt Street Plaza, and Major Streets (streets that are greater than 40 feet in width, measured from building face to building face), buildings shall be set back at least 10 feet from the Streetwall at a height (ranging from 65 feet to 85 feet), as shown in Figure 6.4.1.

On frontages facing Minor Streets (streets that are 40 feet wide or narrower, measured from building face to building face), Upper Buildings shall be set back at least 10 feet from the building face at a maximum height of 45 feet for predominately residential buildings and 65 feet for predominately non-residential buildings as shown in Figure 6.4.2, except for corners as described in Section 6.4.4 and along Craig Lane where the Setback is required at a height of 45 feet for both residential and non-residential uses.

Along certain frontages, the depth of the Setback shall be greater than 10 feet, as shown in Figure 6.4.5.

6.4.2 Ground Floor Setbacks and Insets

To allow for generous pedestrian throughways, some blocks are required to inset the ground floor along specific frontages for widened sidewalks, or at given corners to achieve an eight-foot-wide clear path of travel




Figure 6.4.1 Setbacks on Major Streets

behind curb ramps. The locations for these ground floor setbacks and corner insets are listed below, and dimensions are given in detail in Appendix A Block Controls. These are:

- An inset at the north-eastern corner of Block 1, 3, 5, and 8
- An inset at the north-western corner of Block 2, 4, and
- A five-foot inset of ground floor of the southern frontage of Block 10, unless the walls of Station A are retained)




Figure 6.4.2 Setbacks on Minor Streets and Alleys

6.4.3 Block 6 Setback Exemption

The setback requirements in Section 6.4.1 Building Setbacks do not apply on Block 6. Instead, the highrise tower shall comply with the following:

- The Upper Building must be set back at least 15 feet in the horizontal dimension for at least 60 percent of the Upper Building's frontages facing Humboldt Street and Louisiana Paseo.
- The Upper Building must be set back at least 15 feet in the horizontal dimension for 100 percent of the Upper Building's frontages facing Georgia Lane and the paseo between Block 6 and Block 10.

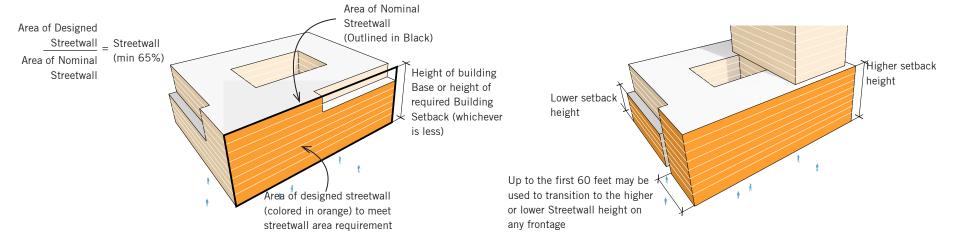


Figure 6.4.3 Streetwall Area Requirement

Figure 6.4.4 Varying Streetwall Heights at Corners

6.4.4 Station A Exemption

In the event that any walls of Station A are retained and additions are made above the existing structure, no setbacks for new construction are required above existing walls. Instead, a vertical hyphen shall be introduced between the existing structure and the new structure. This vertical hyphen shall be at least one floor in height, and at least five feet in depth.

6.4.5 Streetwall

A clear streetwall helps define the experience of the street as an "urban room." Where there is not a strong streetwall, streets can feel inactive and suburban. The Streetwall is defined as the portion of a building:

 Facing a Major or Minor Street, or Waterfront Park, Power Station Park, Humboldt Street Plaza, or the Louisiana Paseo:

- Built to the property line (except for the portions of the building that meet the Modulation and Articulation standards and guidelines in Sections 6.6 and 6.7, which are part of the Streetwall and may recess and project from the building frontage); and
- At an elevation below the maximum Streetwall height per Figure 6.4.5.

The "Streetwall requirement" is that new buildings must provide a Streetwall for at least 65 percent of each frontage from sidewalk grade to the required maximum Streetwall height (see Figure 6.4.4). The Streetwall requirement does not apply to:


 Existing buildings on the project site that may be rehabilitated or reused as part of project (such as Unit 3);

- Any new building constructed on Block 9 if Unit 3 is demolished; or
- Any new building with frontage on Waterfront Park, Power Station Park, Humboldt Street Plaza, or Louisiana Paseo, provided that deviations from the minimum 65 percent standard shall contribute to standout architecture as described in the Project Overview and shown in Figure 6.4.4.

6.4.6 Varying Streetwall Heights at Corners

The maximum Streetwall heights vary across the Power Station site and may differ at the corners of the same building. For a more graceful transition at these corners, up to the first 60 feet of building frontage, measured horizontally from a corner, may be used to transition to the higher or lower Streetwall height on any frontage as required (see Figure 6.4.4)

Figure 6.4.5 Building Setbacks

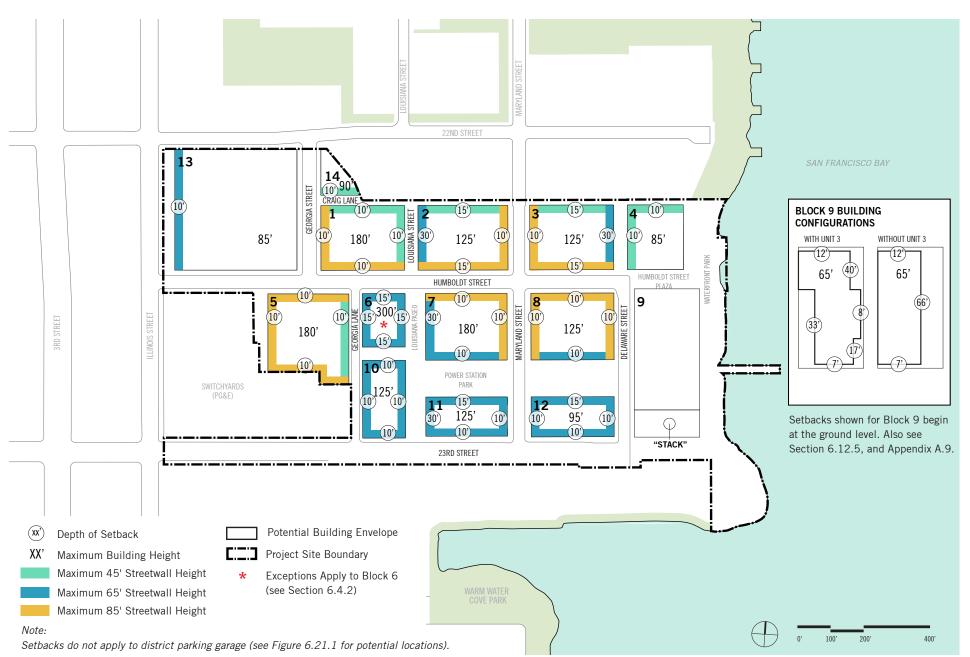

6.5 Upper Building Controls

The controls on the following pages apply only to the Upper Buildings of midrise towers as permitted on Blocks 1, 5, and 7, and the highrise tower permitted on Block 6. Midrise towers are between 126 and 180 feet in height and the highrise tower is between 181 and 300 feet in height.

Table 6.5.1 summarizes the bulk controls for the different portions of buildings based on land use.

 Table 6.5.1
 Summary of Bulk Controls

	LOWRISE BUILDINGS (UP TO 95' IN TOTAL HEIGHT)	MIDRISE BUILDINGS (96'-125' IN TOTAL HEIGHT)	MIDRISE TOWERS (126'-180' IN TOTAL HEIGHT)	HIGHRISE TOWER (181'-300' IN TOTAL HEIGHT)								
UPPER BUILDING BULK CONTROLS												
Building Setbacks (See Section 6.4)	Apply	Apply	Apply	Apply								
Maximum Average Floorplate	N/A	N/A	12,000 gross square feet	12,000 gross square feet (additional floorplate reduction required - see Section 6.5.4)								
Maximum Plan	N/A	N/A	150'	150'								
Maximum Diagonal	N/A	N/A	190'	190'								
Maximum Apparent Face	N/A	N/A	120'	120'								
Upper Building Separation	N/A	N/A	85' if on separate block; 45' if on same block	115'								

Note that controls apply to a building's full height, i.e., "Midrise Towers (126'-180' In Total Height)" refers the whole building, not only those portions of the building at that height.




Figure 6.5.1 Upper Building Maximum Average Floorplate




Figure 6.5.2 Upper Building Maximum Plan and Maximum Diagonal Length




Figure 6.5.3 Upper Building Maximum Apparent Face

STANDARDS

6.5.1 Upper Building Maximum Average Floorplate

The maximum average floorplate of the Upper Building is defined as the sum of the area of all of the floorplates of the Upper Building, divided by the number of floors in the Upper Building. The maximum average floorplate requirement applies to all floors that do not require reduction per Section 6.5.4. Refer to Figure 6.5.1 and Table 6.5.1 for maximum average floorplate sizes that shall apply to buildings based on the building's total height and use.

6.5.2 Upper Building Maximum Plan and Diagonal

The maximum plan dimension of an Upper Building is the greatest plan dimension parallel to the longest side of the building at any given level of the Upper Building. The maximum diagonal dimension of an Upper Building is the greatest horizontal distance between two opposing points at any level of the Upper Building. Refer to Figure 6.5.2 and Table 6.5.1 for maximum plan and diagonal dimensions that shall apply to buildings based on the building's total height and use.


Maximum plan and diagonal dimensions do not apply to balconies, cornices, decorative projections, unenclosed building elements, or other unenclosed obstructions permitted by *Planning Code Section 136* (see Appendix E).

6.5.3 Upper Building Maximum Apparent Face

Maximum apparent face helps control the visual bulk of the Upper Building by placing a limit on the maximum width of a face that can be expressed. Beyond this maximum width, there shall be a change in plane to visually reduce the bulk of the building, and create logical locations for architectural detailing, such as balconies or changes in material or fenestration. The maximum apparent face shall be a maximum of 120 feet of the Upper Building (Figure 6.5.3). The maximum apparent face shall be offset with a change in plane of at least five feet in depth. This change in plane must be accompanied by a change in height of the roof form (which may be a reduction or increase in the height of the roof screen) of at least five feet (refer to Figure 6.5.3) and/or a change in material. The required change in plane may occur by curving the face of the building.

For buildings with curved façades, on those portions of the façade that are curved, the maximum apparent face shall be measured as the plan dimension between the end vectors of each arc. If the building is a circle or ellipse, the maximum apparent face shall be measured as the longest diameter of the circle or ellipse.

Examples of Upper Building Controls Applied to Different Midrise Tower Forms

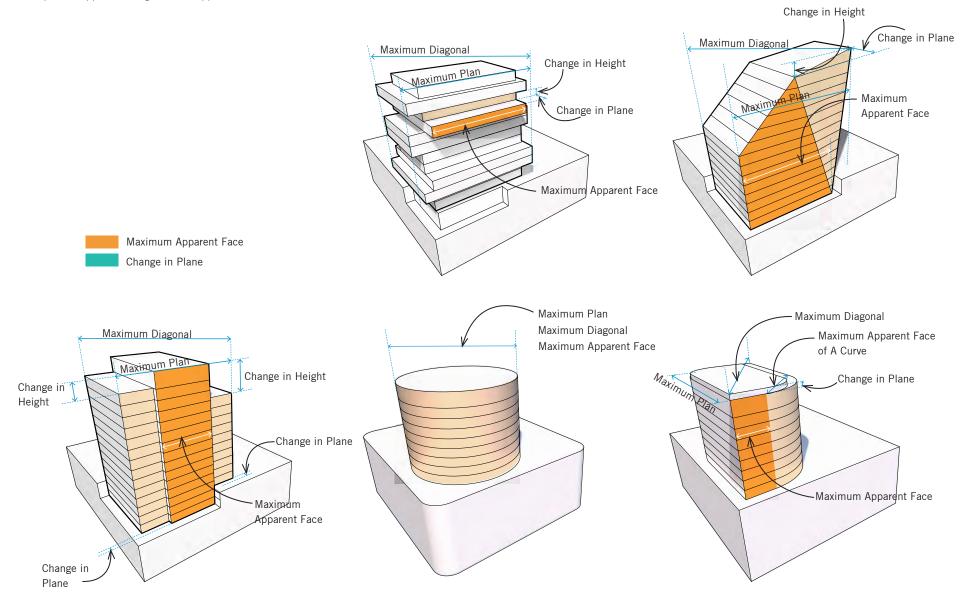

6.5.4 Upper Building Floorplate Reduction

Floorplate reduction controls apply only to the highrise tower permitted on Block 6. The upper 30 percent of the Upper Building shall have a floorplate that is, on average, 15 percent less than the average floorplate of the balance of the Upper Building floors. The percentage reduction is calculated as the average of all of the reduced floorplates divided by the average of all the floorplates without a reduction. (Refer to Figure 6.5.4.)

Floorplate reductions shall result in a reduction in the maximum building diagonal for the subject floors. Maximum floorplate, plan and diagonal dimensions apply as specified in Section 6.5.1 and 6.5.2 Figure 6.5.5 shows examples for permitted and non-permitted reductions.

The reduction can take any form, including but not limited to: a single step, several steps, and tapering. See reference images on page 249 for examples of creative approaches to shaping tops of midrise buildings and towers.

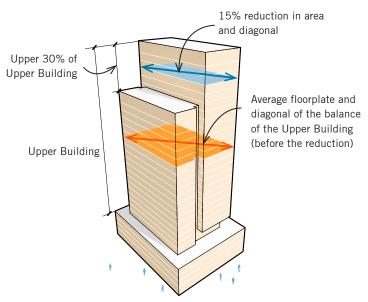


Figure 6.5.4 Upper Building Floorplate Reduction

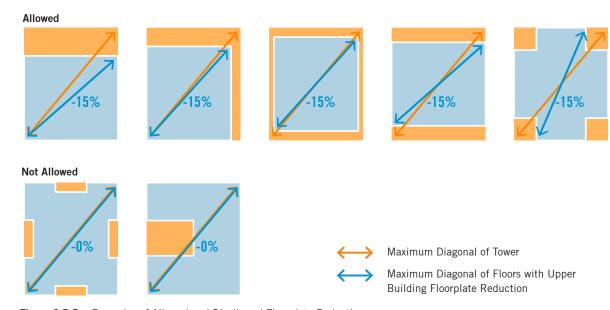


Figure 6.5.5 Examples of Allowed and Disallowed Floorplate Reduction




Figure 6.5.6 Upper Building Separation for Midrise Towers on the Same Block

6.5.5 Upper Building Separation

The Upper Building of a midrise tower shall be separated from any other Upper Building of a midrise tower on the same block by a distance of at least 45 horizontal feet (Figure 6.5.6). Maximum average floorplates in Table 6.5.1 shall apply to the entire block. In the event that there are two Upper Buildings on a block, the combined floorplates of both Upper Buildings would not be permitted to exceed the maximum average floorplate of 12,000 square feet.

The Upper Building of a midrise tower shall be separated from any other Upper Building of a midrise




Figure 6.5.7 Upper Building Separation for Midrise Towers

tower on another block by a distance of at least 85 horizontal feet (Figure 6.5.7).

The Upper Building of a highrise tower shall be separated from any other Upper Building of a midrise tower on another block by a distance of at least 115 horizontal feet (Figure 6.5.8).

Separation shall be measured horizontally from the building face of the subject Upper Building to the nearest building face of the closest Upper Building, exclusive of permitted obstructions pursuant to *Planning Code Section 1.36*.




Figure 6.5.8 Upper Building Separation for Midrise and Highrise Towers

If any midrise tower on Blocks 1, 5, and/or 7 is constructed before the highrise tower on Block 6 the required separation under this Section 6.5.5, shall be measured horizontally from the building face of the subject Upper Building of such midrise tower (exclusive of permitted obstructions pursuant to Planning Code Section 136) to the nearest 15-foot setback line imposed on Block 6 pursuant to Section 6.4.2.

Examples of creative approaches to shaping the tops of midrise towers / towers.

GUIDELINES

6.5.6 Sculpted Highrise Tower

If floorplates are not reduced per Standard 6.5.4, Upper Buildings of mid-rise and high-rise towers shall be sculpted in a manner that enhances the skyline. Examples of how this could be achieved include stepping, tapering, or other shaping.

In addition, the highrise tower on Block 6 should be iconic within the Power Station SUD and larger Central Waterfront Plan Area. The form of the highrise tower should use bold massing moves and be elegant and well-scaled.

Such sculpting shall result in a reduction by at least five percent, but not require a reduction of more than eight percent, of the gross square footage of the Upper Building from the quantitative standards contained in Section 6.5.1. This guideline is an alternative to Standard 6.5.4.

CONSIDERATIONS

6.5.7 Sculpted Upper Buildings

The Upper Buildings of midrise towers and highrise towers should be sculpted to create interesting forms on the skyline. Examples of how this could be achieved include stepping, tapering, or other shaping.









BUILDINGS

[This page intentionally left blank.]

Architecture

Architecture reflects the culture of a neighborhood, connecting buildings with the public life that occurs on its streets.

Architecture at the Power Station is deferential to its industrial context and the Third Street Industrial District. It builds from the larger bulk and massing moves established by the project's urban form and focuses on enhancing visual interest and creating human-scaled designs critical for creating a memorable pedestrian experience. Building Modulation and Articulation ensure a building's walls are not overwhelming nor monotonous, while color and materiality guidelines provide a baseline for high-quality finishes consistent with the Power Station's overall industrial aesthetic.

Building Modulation and Articulation as defined in this D4D document (Sections 6.6 and 6.7) help create visual interest, rhythm, and human-scaled dimensions within the "urban room" of the street, and are therefore considered compliant with and part of the Streetwall. Buildings meeting ground floor design guidelines in Section 6.9 are also compatible with the Streetwall requirements contained herein.

6.6 Building Modulation

Building Modulation (or "Modulation") is required in order to create visual interest, rhythm and human-scaled dimensions. Modulation can also serve functional purposes, such as creating opportunities for recesses that can serve as terraces or balconies. Modulation strategies shown in this section are consistent with the industrial character of the area.

New buildings above the ground floor must be modulated in the manner described in this section. These controls do not apply to existing buildings on the site (such as Unit 3) that may be rehabilitated as part of the project.

STANDARDS

6.6.1 Building Modulation

The Streetwall (Section 6.4.3) shall be modulated by providing either a Change in Plane, or Change in Material, or any combination of the two, as described below. See Figure 6.6.1.

A) Change in Plane

To achieve Modulation by a Change in Plane, the Streetwall must recess or project at least three feet in depth (a "Change in Plane") using any of the individual design approaches, or a combination of design approaches listed below and illustrated in Figure 6.6.1 for at least 20 percent of the Streetwall, which may but is not required to be contiguous:

- Volumetric notches (including balconies)
- Vertical shifts
- Sawtooth balconies or bay windows
- Corner expression
- Volumetric projections
- Volumetric recesses

B) Change in Material

To achieve Modulation by a Change in Material, the material change must:

- Occur for at least 20 percent of the Streetwall or 15 linear feet, whichever is greater, (which may, but is not required to be contiguous) above the ground floor; and
- Express a reveal of at least 18 inches in depth.


C) Change in Plane and Change in Material

Modulation may also be provided by a combination of Change in Plane and Change in Material, provided that any combination of subsections A) and B) occur for at least 20 percent of the façade, which may but is not required to be contiguous.

6.6.2 Encroachments and Projections

Projections as permitted in *Planning Code Section 136*, and those permitted in this Design for Development document shall be permitted above the ground level and may count towards Modulation requirements.

Figure 6.6.1 Examples of Streetwall Modulation

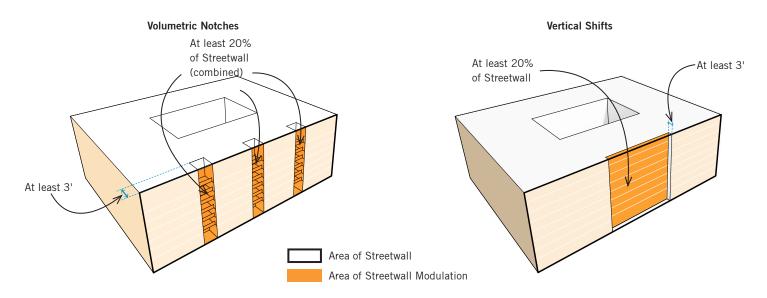




Volumetric notches add visual interest by introducing vertical recesses into the massing of the streetwall. The notches should correspond to the delineations between individual units, balconies, or porches.




The use of vertical shifts add visual interest by breaking the façade into smaller vertical elements. These shifts should relate to the location and proportion of interior programmatic uses.

Examples of Streetwall Modulation (continued)

Sawtooth Balconies and Bay Windows

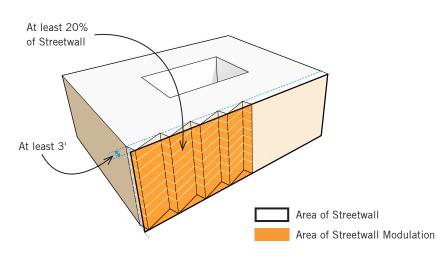

Corner Expressions

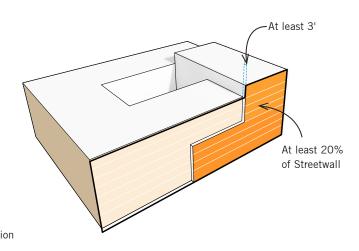




Sawtooth balconies or bay windows reduce the visual mass of the streetwall by introducing a pattern of smaller-scaled components. They can be open, partially enclosed, enclosed, projections, or recesses from the main façade.




This strategy modulates a building's façade by emphasizing the corner and creating the illusion of two or more distinct volumes intersecting with each other. The apparent volumes typically have a change in plane, height, material or fenestration.

Examples of Streetwall Modulation (continued)

Volumetric Projections

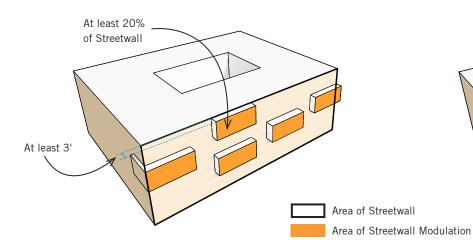



Change in Material



Projections help create shadow lines and added façade depth. Such projections should be located and scaled to relate to interior programmatic uses.



Changes in material introduce visual contrast and interest with a variety of textures and colors.

Examples of modulation compatible with historic districts.









GUIDELINES

6.6.3 Industrial Streetwall Character

To relate to the Power Station's industrial context, the Streetwall along 23rd Street and Illinois Street should be articulated with one or more of the following patterns, which would help meet the Midrise Building Articulation guidelines described in Section 6.7.3 and be used as part of a design approach that meets the Building Modulation requirements.

- A solid wall with punched openings;
- A gridded pattern, emphasizing vertical piers;
- A wall containing a visible expression of horizontal floorplates and large, glassy openings with smaller panes.

6.6.4 Midrise Tower Modulation

Above the Base, the midrise towers on Blocks 1, 5, and 7 should use balconies as an organizing element for Upper Building modulation, giving them a residential scale and creating indoor/outdoor opportunities to enliven the building façade.

6.6.5 Highrise Tower Modulation

Above the Base, the highrise tower on Block 6 should employ modulation techniques, such as a change in material or change in plane, that is carefully considered with sculpting of the tower, per Section 6.5.4 and façade articulation, per Section 6.7.



Use balconies as an organizing element for the massing and design of the building, creating a residential scale.



Consider lowering the streetwall at the base of the tower portion to create a proportionate streetwall relative to the tower.



The tops of these buildings should be visibly reduced in mass and dimension to create a stepped or a tapered effect.



A change in height and plane is effective at breaking up bulk and avoiding Long undifferentiated façades.



Recesses help create shadow lines, depth, a sense of quality, and durability.



The use of natural materials such as brick or stone can bring a tactile quality to the pedestrian zone.



Projected windows help create shadow lines and added façade depth.



Local rustication of vertical piers is a common reference to industrial architectural detailing.

6.7 Façade Articulation

Building façades should be articulated by employing the strategies outlined below. Articulation supports Modulation by creating visual interest, but at a finergrained scale.

GUIDELINES

6.7.1 Depth of Façade

Full brick or masonry are among the site's preferred materials. If thin brick or masonry or panel systems are used, these materials should read as having a volumetric legibility that is appropriate to their thickness. For example, masonry should turn the corner at a depth that is consistent with the typical depth of a brick. Examples of strategies that can be used to articulate a façade with volumetric depth include:

- Use of architectural treatments that create visible shadow lines including vertical recesses, notches, massing reveals, or changes in plane at least six inches in depth; or,
- Windows and other openings are an opportunity to reinforce the volumetric legibility of the façade, with an appropriate depth that relates to the material selected. For example, the depth of the building frame to the glazing should be sufficiently deep to convey a substantial exterior wall, and materials should turn the corner into a window reveal.

Also see Section 6.8.3 for guidelines relating to material quality and durability.

6.7.2 Façade Organization

Each building should be organized into a visible hierarchy and a consistent system with patterning or rhythm that defines an internal logic. Building elements and themes should be appropriately scaled and proportionate to the overall building.

Examples of strategies that can be used to define hierarchy and proportion that are also consistent with the neighborhood's industrial characteristics include:

- Vertical or horizontal elements that create a rhythm or patterning within the façade
- Contrast in the scale of patterns, such as larger patterning of structural piers and bays that convey an industrial scale, combined with a smaller patterning of window mullions and sashes that are finer-grained and more detailed at the pedestrian scale; or
- Key programmatic elements such as building circulation, gathering spaces, building lobbies, and so on clearly expressed in the design of the façade.

6.7.3 Midrise Building Articulation

Predominantly residential buildings between 95 and 125 feet in height should be articulated with smaller volumes, such as windows, doors or balconies that highlight a residential scale using reveals from six inches to three feet in depth.

Predominantly non-residential buildings between 95 and 125 feet should be articulated with strong horizontal elements that convey a more industrial aesthetic, such as clearly expressed floorplates separated by a consistent glazing pattern (see precedent images in Section 6.6).

6.7.4 Tower Articulation

The façade of midrise and highrise towers should be lighter and more loft-like than the Base, with thinner vertical and horizontal elements that feature more glazing.

6.8 Color and Materials

STANDARDS

6.8.1 Bird-Safe Glazing

Bird-safe glazing including but not limited to fritting, netting, permanent stencils, frosted glass, exterior screens, UV patterns visible to birds, or physical grids placed on the exterior of glazing shall be applied to:

- The portion of the building façade between grade and 60 feet in height on buildings located within 300 feet of open spaces that are at least two acres and at least 60 percent vegetated with landscaping, meadows, grassland or open water; and,
- Where unbroken glazed segments of free-standing glass that are 24 square feet or larger are provided on any portion of the building, including glass walls, wind barriers, skywalks, balconies, and greenhouses on rooftops.

To qualify as Bird-Safe Glazing, vertical elements of window patterns should be at least quarter inch wide at a maximum spacing of four inches or horizontal elements at least one eighth inch wide at a maximum spacing of two inches.

GUIDELINES

6.8.2 Recommended Materials

Recommended materials should be incorporated into building design. Recommended materials include brick, concrete, copper, steel, glass, smooth stucco and wood. Avoid using veneer masonry panels except as described in Section 6.7.1 Depth of Façade. Avoid using smooth, flat, or minimally detailed glass curtain walls; highly reflective glass; coarse-sand finished stucco as a primary siding material; bamboo wood siding as a primary siding material; laminated timber panels; or black and dark materials should not be used as a predominate material.

Where metal is used, selection should favor metals with naturally occurring patina such as copper, steel, or zinc. Metals should be matte in finish. Where shiny materials are used, they should be accent elements rather than dominant materials, and are generally not encouraged.


6.8.3 Quality and Durability

Exterior finishes should have the qualities of permanence and quality found in similar contextual building materials used on neighboring sites and in the Central Waterfront. Materials should be low-maintenance, well suited to the specific maritime microclimate of the neighborhood, and able to naturally weather over time without extensive maintenance and upkeep

CONSIDERATIONS

6.8.4 Color and Finish

have more presence on the skyline.



Materials should be selected in coordination with the expression of the building's organization, for example, using more substantial materials, such as masonry and metals, to define corners, and lighter materials, such as glass and wood, to define vertical circulation.

Also see Section 6.6 for how changes in material and color should be combined with modulation strategies to reinforce visually interesting and human-scale building design.

6.8.5 **Glazing**

Glazing selection should be made with consideration to energy performance. Glazing should be generally light in color and low-reflectance in order to achieve a balance of daylighting and energy performance.

6.8.6 Decorative Materials



Architectural details should be inherent features of the facade materiality and should not appear as "tacked on." Details that break up massing through the use of decorative masonry courses, joints, patterns, or contrasting metal insets are encouraged.

6.8.7 Pedestrian-Oriented Materials

The first and second floor of the building are most visible at the street level, and therefore most prominently shape the pedestrian experience.

Façades within the first two floors of the building should be designed with higher quality materials that offer color, variety, wear-resistance, and visual interest to the pedestrian. Façade designs within this area should incorporate more than one material and reflect the individual program or building.

Specific design considerations related to different ground-floor frontages may be found in Sections 6.10 through 6.16.

6.8.8 Living/Green Walls

Living walls and/or plantings may be used to provide a highly visible, biophilic amenity and passive cooling benefit. Vegetation may be integrated into exterior shading to support shading performance and enhance privacy, and would be a permitted obstruction on floors above the ground floor. Living walls are also permitted on the ground floor provided that they do not encroach into public rights-of-way or pedestrian throughways.

Examples of recommended materials.







Corten Steel

Copper Cladding

Brick in any range of colors, especially modern applications such as this offset stacked pattern









Fritted Glass

Terra Cotta

BUILDINGS

[This page intentionally left blank.]

Design Context

Buildings and public realm will work together to frame an active, urban experience that draws on, and connects to, the surrounding context.

Buildings should not be designed as individual objects that stand on their own, but instead as contributors to the character of the length of the streets and open spaces that they frame. The frontages of all of the buildings that enclose a space will work together to create the experience along each street and alley, in addition to being designed with regard for the whole building. The frontage character proposals in this D4D are meant to enhance that concept and anchor it into a specific context.

The pages that follow provide standards and guidelines to help establish the character of key building corners, frontages, and façades throughout the site.

In the best urban neighborhoods, ground-floor uses work together with the adjacent sidewalks and public spaces to frame an interesting and diverse pedestrian experience. Together, they provide a continuous network of spaces that are active, safe, comfortable, and engaging.

Accordingly, the key to designing such spaces will be ensuring flexibility—high ceilings, ability to subdivide, strategies to add or remove doorways—such that the buildings can be adapted to different uses by different users as the city grows and changes

6.9 Ground Floor Design

STANDARDS

6.9.1 Ground Floor Height

All non-residential ground floor spaces shall have a minimum floor-to-floor height of 15 feet as measured from grade, except PDR frontages, which shall have a minimum floor-to-floor height of 17 feet.

For Ground Floor of Blocks 11 and 12 facing 23rd Street Sugar Warehouses and Block 13 facing American Industrial Center all ground floor spaces shall have a minimum floor-to-floor height of 15 feet as measured from grade.

6.9.2 Ground Floor Uses

All Standards and Guidelines contained in Section Figure 6.2.2, Ground Floor Uses, shall apply.

6.9.3 Awnings and Canopies

Where provided, awnings and canopies must be at least eight feet above sidewalk grade. Awnings that are more than 100 feet in length (as on 23rd Street) must be at least 15 feet above sidewalk grade.

Awnings that are between eight and 15 feet above sidewalk grade may project up to 10 feet into the public realm (including the public right of way). Awnings that are higher than 15 feet above sidewalk grade may project up to 15 feet into the public realm (including the public right of way).

In no instance shall awnings project beyond the width of the sidewalk they cover. Awnings shall be designed so as not to interfere with street tree canopy.

6.9.4 Transparent Frontage

Frontages with Active or Active Lane Uses that are not Residential or PDR shall be fenestrated with transparent windows and doorways for not less than 60 percent of the street frontage at between two feet and 12 feet vertical above grade, and must allow visibility of at least four feet in depth inside of the building.

PDR frontages shall be fenestrated with transparent windows or doors for no less than 50 percent of the street frontage from sidewalk grade up to 12 feet vertical above grade, and must allow visibility of at least four feet in depth inside of the building.

The use of dark, mirrored, or opaque glass shall not count toward the required transparent area.

Ground floor Transparent Frontage standards shall not apply to historic or adaptively-reused buildings.

6.9.5 Gates, Railings, and Grillwork

Any decorative railings or grillwork (other than wire mesh) that is placed in front of or behind ground floor windows shall be at least 75 percent open to perpendicular view. Rolling or sliding security gates shall consist of open grillwork rather than solid material, so as to provide visual interest to pedestrians when the gates are closed, and to permit light to pass through mostly unobstructed. Gates, when open, folded, or rolled, as well as gate mechanisms, shall be recessed within, or laid flush with the building façade.

CONSIDERATIONS

6.9.6 Storefront Design

Non-residential ground floor frontages may be set back at least two feet from the sidewalk, to create a datum for storefronts to have individual expression, allow for a transitional space between store and sidewalk for window shopping, and expand opportunities for seating in the frontage zone.

Non-residential frontages should be designed with vertical and horizontal elements that can be personalized or adapted with different materials. Elements such as bulkheads, piers, signboards (as defined in Power Station Definitions), and recessed entries are encouraged. In addition to allowing for individualization, these elements provide a human scale of detailing to the street experience. Vertical elements should be primary in the design of frontages, and bulkheads should be secondary, with piers coming to the ground and bulkheads recessed.



Figure 6.9.1 Ground Floor Retail Design



The ground floor of the building should be clearly identifiable through an inset, a change in material, or a change in proportion of the façade design, as illustrated in the images above.



Retail frontages will be designed with elements that can be personalized.



Fully glazed frontages make it difficult for retailers to distinguish themselves, and make for an uninteresting pedestrian experience.

6.10 Key Frontages and Corners

Certain building corners and frontages at the Power Station warrant greater architectural design consideration due to their prominent location—as the visual terminus of a view corridor, proximity to a landmark, or entrance to the site's central green. The guidelines below are intended to ensure that sufficient attention be paid to such frontages and corners.

STANDARDS

6.10.1 Block 12 Transit Support Facilities

A SFMTA Muni "XX" Bus terminal stop shall be provided along the south side of Block 12 as shown in Figure 5.5.2, where up to two buses may lay-over at a time, unless SFMTA determines that no such bus layover is necessary. Due to transmission line easements below the street, no structures containing permanent footings may be constructed.

The following facilities shall be located on the 23rd Street frontage of Block 12 and be consistent with Third Street Industrial District guidelines per Section 6.11:

- An indoor bathroom for Muni driver to use during breaks; and,
- Public seating affixed to the face of the building to be used as a transit shelter for people waiting for the bus, with a real-time information screen for expected bus arrival times and an overhead shelter. Such seating, shelter, and signage may project from the face of the building into the sidewalk area.

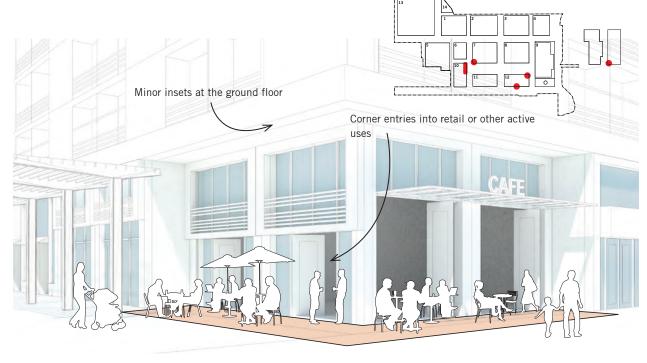


Figure 6.10.1 Key Frontages and Corners

GUIDELINES

6.10.2 Special Corners: Block 7

To create an invitation to Power Station Park from Louisiana Paseo, the southwest corner of Block 7 should include one of the following features:

- Transparency for at least 15 linear feet on either side
 of the corner at the ground floor between the heights of
 two and 12 feet above sidewalk grade so that views of
 Power Station Park may be perceived prior to turning
 the corner. The transparent corners may count towards
 Transparent Frontage requirements;
- Building shaping such as a chamfer or rounding of corners; or

 Architectural detailing that emphasizes the importance of this corner.

6.10.3 Special Corners: Block 9 without Unit 3 P Block 9 without Unit 3 should be a standout, signature waterfront building that is well-designed with use of high-quality materials commensurate with its waterfront

waterfront building that is well-designed with use of high-quality materials commensurate with its waterfront location against the iconic Stack.

To create an open and inviting entrance to Waterfront Park and Stack Plaza from Delaware Street and Power Station Park, the southwest corner of Block 9 without Unit 3 should use high-quality materials, such as brick, concrete, copper, steel, glass, and wood, and in addition



Corner retail help activate the street and promote engagement with the public realm.



Building corner should bring a heightened level of visual interest to emphasize the importance of street intersections.



Face of building becomes an important visual terminus and focal point.

shall include volumetric shaping of any building in the area within 15-feet of the southwest corner of Block 9 with architectural treatments including but not limited to chamfers, round edges, setbacks, and/or protrusions to highlight views or relate to the shape of the Boiler Stack from the public realm.

6.10.4 Special Corners: Block 12

To frame the view of the Stack, the northeast corner of Block 12 should include the use of high quality materials, such as brick, concrete, copper, steel, glass, and wood, and in addition shall include volumetric shaping of the area of a building within 15-feet of the northeastern corner of Block 12 with architectural

treatments including but not limited to chamfers, round edges, setbacks, and/or protrusions to highlight views or relate to the shape of the Boiler Stack from the public realm.

6.10.5 Block 10 Eastern Façade

The northern half of the eastern face of Block 10 is an important visual terminus of Power Station Park and should be designed with high quality materials in addition to employing one of the following:

 A Change in Material and/or Plane consistent with Modulation standards described in Section 6.6.1.

- Façade Articulation that creates visible shadow lines including vertical recesses, notches, massing reveals, or changes in plane at least six inches in depth, consistent with guidelines described in Section 6.7.
- Vertical or horizontal elements that create a sense of rhythm, hierarchy and proportion, consistent with guidelines described in Section 6.7.2.

The guidelines listed above shall not apply to existing structures or portions of existing structures retained onsite.

6.11 Third Street Industrial District Frontages

The western façades of new buildings fronting Illinois Street, the southern façades of new buildings fronting 23rd Street, and the eastern and/or southern façades of new buildings fronting the Stack are contributors to the Third Street Industrial District. The following standards and guidelines will ensure that new buildings respond to and reinforce the character of this district. Unless otherwise stated, these standards and guidelines apply to all frontages specified in Figure 6.11.1.

Standard 9 of the Secretary of the Interior's Standards for Rehabilitation ("Secretary's Standards") guides all standards and guidelines in this section. Standard 9 states that new work shall be differentiated from the old and be compatible with the massing, size, scale, and architectural features to protect the integrity of the historic district and its environment. Compliance with Standard 9 is achieved through the design controls set forth in this section.

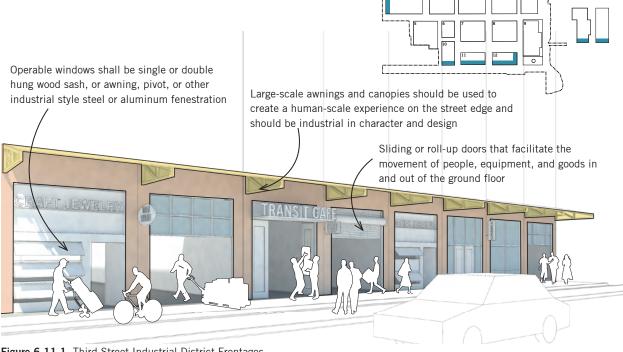


Figure 6.11.1 Third Street Industrial District Frontages

STANDARDS

6.11.1 Third Street District Ground Floor Height

For Ground Floor of Blocks 11 and 12 facing the 23rd Street Sugar Warehouses and Block 13 facing the American Industrial Center all ground floor spaces shall have a minimum floor-to-floor height of 15 feet as measured from grade.

6.11.2 Third Street District Height and Massing

In order for 23rd and Illinois Streets to appear balanced on either side, new construction shall respect existing heights of contributors to the Third Street Industrial District by including an upper level 10-foot setback at approximately 65 feet, as required by Section 6.4.1 Building Setbacks.

6.11.3 Third Street District Awnings


An awning shall be provided on the southern façades of Blocks 10, 11, and 12 that face 23rd Street at a height of 15 to 25 feet above sidewalk grade to reference the industrial awning at the westernmost Sugar Refinery Warehouse. Awnings at this location may project up to 15 feet into the public realm.

Should the southern façade of Station A be retained, an awning on Block 10 would not be required.

For Block 13 frontages facing Illinois Street, canopies and awnings should only be located at the retail land use at the corner of Illinois and 22nd streets.



Openings can turn the corner adding lightness and transparency at the corners of a building with punched openings.



- They should be flat or pitched, and should not be arched. The functional supporting structure and/ or tieback rods should be clearly read (i.e., remain apparent to the observer).
- Materials used for canopies and awnings should be utilitarian. Suggested materials include wood, standing seam or louvered metal panels, and corrugated metal.



Well-proportioned panels create a hierarchy of scale within the façade patterning. The recessed entrance provides a focal point.

Modulation and articulation relate to structural bays, interior floor-to-floor heights, and activities within.

6.11.4 Third Street District Fenestration

Operable windows shall be single or double hung wood sash, awning, pivot, or other industrial style steel or aluminum fenestration. Casement windows shall be avoided at lower building massing. Divided lite windows are appropriate.

Ground level glazing shall incorporate transom windows if not utilizing roll up or full height sliding doors.

Upper level glazing shall consist of regular repeated punched openings with divided lite windows. Punched openings shall be rectangular in proportion; an exception is the use of segmentally arched openings if the building material is brick.


6.11.5 Third Street District Building Rooftops



Rooftops shall reflect the historic industrial character of the district and include flat, monitor, or shallow shed roofs. Gable or hipped roofs shall be avoided as primary features.

GUIDELINES

6.11.6 23rd Street and Illinois Street Frontages



A) Architectural Features

Regularly-spaced structural bays should be expressed on the exterior of the lower massing through the use of rectangular columns or pilasters, which reference the rhythm of loading docks on the Western Sugar Refinery Warehouses and American Industrial Center Southern Extension. Bay widths should be no larger than 30 feet on-center.

Architectural features such as cornice lines, belt courses. architectural trim, or change in material or color should be incorporated into the building design to reference heights and massing of the Western Sugar Refinery Warehouses on 23rd Street and American Industrial Center on Illinois Street at areas of the façade that are not required to be set back per Section 6.4.

B) Bus Shelter

The bus shelter should be utilitarian in materiality and designed to reflect the industrial nature of the nearby Western Sugar Refinery Warehouse buildings. The bus shelter shall be coordinated with the building design on Block 12. (See also Section 6.10.1 Block 12 Transit Support Facilities).

6.11.7 Third Street District Openings



To the extent allowed by the Department of Public Health, large doors, such as sliding or roll-up doors that facilitate the movement of people, equipment, and goods in and out of the ground floor of these buildings should be incorporated along 23rd Street and Illinois Street.

6.11.8 Block 9 without Unit 3



Block 9 with or without Unit 3 must additionally comply with the following guidelines:

- New construction at Block 9 without Unit 3 shall comply with bulk controls per Section 6.1.5.
- New construction without Unit 3 shall be designed as standout architecture, a signature building set within the site's signature open space.
- New construction at Block 9 without Unit 3 must interact meaningfully with the Stack, such as referencing the existing relationship between it and Unit 3 (i.e., the simple, iconic form of the Stack in contrast to the highly complex, detailed form of the Unit 3 Power Block).
- New construction at Block 9 without Unit 3 must provide permeability through the building's ground floor, allowing pedestrian access directly through the building from its entrance facing Power Station Park to its entrance facing Waterfront Park (see Section

CONSIDERATIONS

6.11.9 Block 9 without Unit 3: Retained Elements Block 9 with or without Unit 3 should consider the following:

- Consider retaining the existing exhaust infrastructure connecting Unit 3 with the Stack and incorporating it into the new structure.
- Consider preserving other elements of Unit 3 in the new structure on Block 9.

6.12 Existing Buildings within the Third Street Industrial District: The Stack

The Stack is a recognizable and well-loved icon of the Central Waterfront, visible from many places around the city. Its historic purpose was as a smokestack for the emissions from the Unit 3 power station when it was operational. This building will be retained as an icon for the site, and the intent for the building is that it can be adapted to be reused in any number of ways that will add interest and create a destination along the waterfront.

STANDARDS

6.12.1 Repair and Seismic Retrofit

Structural and/ or seismic upgrades to the interior or exterior of the Stack to ensure safety and resilience of the structure shall be permitted. Such upgrades may include painting (to match existing), installation of carbon-fiber sleeves, and other structural reinforcements as necessary. Exterior upgrades shall not be read as a separate structure from the Stack and shall not alter the exterior form.

6.12.2 Building Access

Up to two penetrations are allowed on the ground floor. Each may be no larger the 12 feet wide and 10 feet high allowing for ingress and egress into the Stack.

Penetrations to allow for an occupiable connection between the Stack and Unit 3 are permitted on upper stories, provided that the openings do not exceed 10 feet wide by 20 feet high.

6.12.3 Character-Defining Features

The following features of the Stack are considered character-defining and should be maintained:

Reinforced concrete construction

- Tapered form
- 300-foot height
- Crow's nest walkway
- Exterior metal ladder

GUIDELINES

6.12.4 Public Art

The interior of the Stack may be painted or otherwise decorated as public art. Public art installations on the exterior are limited to light installations.



Image looking from the base of the stack toward the top.

6.13 Existing Buildings within the Third Street Industrial District: Unit 3

STANDARDS

6.13.1 Unit 3 Retained Features

If Unit 3 remains, the following existing features must be retained:

- Exterior visibility of at least 50 percent of the steel gridded frame of the Unit 3 structure (as illustrated in Figure 6.2.1) with a minimum visibility of 75 percent of the eastern and western façades;
- A minimum building height of 128 feet (the height of the existing Unit 3 Structure);
- Exterior visibility of the 143-foot tall, concrete Elevator Shaft; and,
- The eastern façade of the Office structure

6.13.2 Waterfront Access Corridor (Turbine Plaza)

A corridor for visual and physical access between Delaware Street and the waterfront must be provided. A portion of the corridor may be enclosed and serve as common space within the hotel, so long as the corridor is open to the public and provides a direct connection between Delaware Street and the waterfront. The unenclosed portions of the corridor serves as outdoor open space. At minimum, the corridor must meet the following criteria:

- Have a minimum width of 70 feet:
- Have at least 65 percent of the area open to the sky exclusive of obstructions permitted within setbacks pursuant to Planning Code Section 136 and existing structure(s). Portions of the corridor that are not open to the sky may be enclosed
- Have a minimum clearance height of at least 25 feet above grade.

- Provide visual access between Delaware Street and the waterfront, with the eastern and western façades of any enclosed portion of the corridor being at least 85 percent transparent;
- Provide pedestrian access between Delaware Street and the waterfront, with the eastern and western façades of any enclosed portion of the corridor having large and obvious doors that welcome the public to cross through any enclosed area;
- Be publicly accessible at times when it is reasonable to expect substantial public use;
- Furniture, including tables, chairs, umbrellas, heat lamps, planters, and other amenities to encourage pedestrian use is allowed; and
- Provide ample pedestrian lighting to ensure pedestrian comfort and safety.

6.13.3 Unit 3 Gross Floor Area

The total Gross Floor Area of all buildings on Block 9 shall not exceed 241.600 square feet.

6.13.4 Unit 3 Height

Height of the block shall be limited to 65 feet, except for existing portions of the building to remain, including the steel gridded frame at 128 feet and concrete elevator shaft at 143 feet tall. In addition to those features listed in Section 6.2.4, the following features shall be exempt from height:

• Enclosed space related to the recreational and/or Retail use of the roof on the existing Unit 3 structure and new northern addition, provided that each space does not exceed 5,000 square feet. The enclosed space is

exempt from the 1-to-1.2 setback required on all other rooftops.

6.13.5 Unit 3 Setbacks

Setbacks from the property line commencing at the ground level are required along the eastern, western and northern frontages of Block 9, as indicated on Figure 6.4.5, with certain permitted obstructions including the Fire Access Passenger Loading (FAPL) zone, pump house, awnings and canopies permitted under Section 6.9.3, furnishings permitted in Outdoor Café and Restaurant Seating and Outdoor Food Service Zones. Section 4.9, a balcony permitted to encroach up to 12 feet into 29-foot setback within the southeastern portion of the buildable area, and obstructions permitted within setbacks pursuant to Planning Code Section 136.

6.13.6 Unit 3 Ground Floor

Active Uses shall be provided on the ground floor, consistent with Section 3.2.4 and Figure 3.2.1.

Unit 3 Frontages with Active Uses shall be fenestrated with transparent windows and doorways for not less than 40 percent of the street frontage at between two feet and 12 feet vertical above grade, and must allow visibility of at least four feet in depth inside of the building.

6.13.7 Unit 3 Additions



Horizontal and vertical additions to the structure are permitted provided that such additions comply with all other provisions of this section and the D4D. Additions shall also comply with the Third Street Industrial District Frontage Standards and Guidelines contained in Section 6.11.

6.13.8 Unit 3 Public Amenities

A publicly-accessible restroom shall be provided within Block 9, either in the repurposed Unit 3 structure or in an addition to the structure.

CONSIDERATIONS

6.13.9 Unit 3 Retained Features



In addition to the Retained Features listed above under the Standards for Block 9, the following features should be considered for retention as feasible:

- The Exhaust Tubes connecting Unit 3 and the Stack:
- Portions of the Office structure on Bay side, including metal panel cladding; and
- Concrete construction and exposed infrastructure that expresses industrial character.

6.13.10 Unit 3 Additions or New Buildings



Additions or any new-construction on Block 9 should be carefully designed to be high quality in construction but modest in character, so as to not draw attention from the primary steel frame structure of Unit 3.

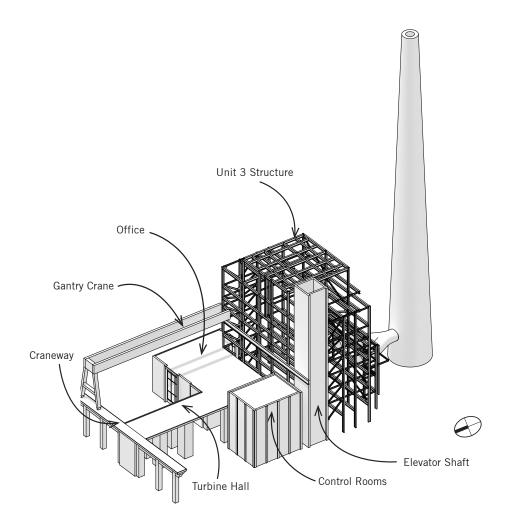


Figure 6.13.1 Components of Unit 3

6.14 Park Frontages

Building frontages facing Power Station Park and Waterfront Park are opportunities for architecture that will be inviting and create a sense of arrival and interest.

Third Street Industrial District Frontage controls will also apply to specific Power Station Park and Waterfront Park frontages as indicated in Figure 6.11.1.

STANDARDS

6.14.5 Waterfront Access at Block 9

The design of Block 9 without Unit 3 shall allow for direct pedestrian passage through the building from its entrance facing Power Station Park to its entrance facing Waterfront Park. See Section 6.13.2 for requirements related to the Waterfront Access Corridor at Block 9 with Unit 3 (also known as Turbine Plaza) and Section 6.11.8 for waterfront access guidelines for Block 9 without Unit 3.

CONSIDERATIONS

6.14.1 Permeability

Use of accordion doors, roll up doors, and other ways to increase permeability between indoor and outdoor uses are encouraged.

6.14.2 Historic Shoreline

Buildings may include references to the historic shoreline that runs through the eastern portion of Power Station Park, utilizing shifts in building planes, changes in material, or other interpretive design elements.

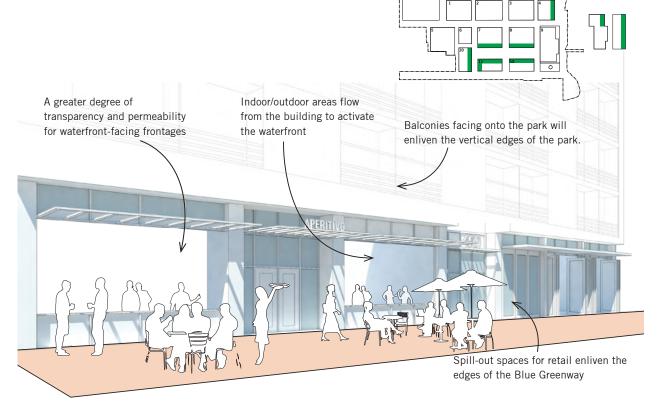


Figure 6.14.1 Park Frontages

6.14.3 Balconies and Terraces

Building frontages facing Power Station Park and Waterfront Park are an ideal location for generous balconies and terraces, which will enliven the built edge of the waterfront. The design of these frontages may incorporate large overhangs and balconies as an integral part of the design concept.

6.14.4 Pedestrian Passages

Building frontages facing Power Station Park and Waterfront Park are ideal locations for transparent building atria that form connections through buildings from the Park or Waterfront to surrounding streets.



Façades that can be folded away create a sense of connection between the indoor and the outdoor environment.



Larger-scale moves at the ground floor create an emphasis on the public nature of the uses.



This waterfront building uses the structure at the building edge as a way to frame inviting indoor/outdoor spaces.



This waterfront building frontage is designed to be very permeable with many balconies and an indoor-outdoor ground floor that spills out and activates the adjacent wharf.

6.15 Residential Character

Residential buildings may be characterized by a finer-grained pattern of small-scale stoops and entryways. These intermediate spaces are neither fully private nor fully public, creating a comfortable social interval between a unit and the street. Where stoops are large enough to be occupied, they can provide an opportunity for casual interaction between neighbors and with passersby.

San Francisco's draft *Ground Floor Residential Design Guidelines* may serve as a reference for additional approaches to ground-floor design.

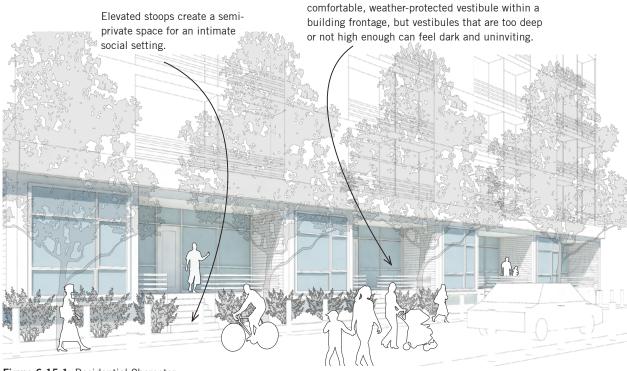


Figure 6.15.1 Residential Character

STANDARDS

6.15.1 Minimum Height of Stoops

Residential stoops that are slightly elevated from the street create a comfortable social distance that lets residents experience greater privacy in their unit. The landing elevation of stoops for residential units shall be between 18 and 48 inches above finished sidewalk grade, unless the building is located on a grade that does permit stoops to be provided at this elevation without requiring internal ramping or stairs to connect the units to the building's lobby and amenities.

Another way to create social distance between a unit and the street is to inset and lower units, rather than raise them. Units may be built with floor-planes up to a full floor below grade, as long as they are individually accessed and connected to grade level via stairs or other means of access. Units accessible below grade must also otherwise meet exposure requirements per Section 6.1.3, with connection to upper levels that open onto a street, alley, mid-block alley or open space.

Up to 25 percent of stoops on any given frontage may deviate from these minimum 18 inch and maximum

48 inch elevation requirements. This requirement shall be superseded by ADA requirements if said ADA requirements do not permit implementation.

Stoops that are set into to a building can create a

6.15.2 Inset Stoops

Stoops that are inset to a building can create a comfortable, weather-protected vestibule within a building frontage. However, vestibules that are too deep and not high enough can feel dark and uninviting. If a vestibule if provided, the height of the vestibule shall be at least 1.5 times the depth of the inset; for example, a

vestibule that is inset six feet is required to be at least nine feet in height.

6.15.3 Stoop Entries

Where stoops are provided, they shall be considered secondary entries, where unit numbers and doorbells are not to be placed. The primary entry must be through an accessible path of travel (such as an interior lobby). Secondary entrances must also have lockable gates, which help identify stoops as secondary entrances; these gates may be low in height.

Should the Department of Building Inspections permit entrances at stoops to serve as primary entrances and meet all applicable ADA requirements, stoops may be considered primary entrances.

6.15.4 Projection of Stoops

Stoops and planted areas along the face of a building can create a softer edge where residential buildings meet the street. In order to allow for a strong streetwall while also ensuring that stoops have adequate room to enliven sidewalks, stoops are allowed to encroach up to four feet into the adjacent sidewalk of a shared street, alley, or open space, as long as a minimum six-foot continuous Pedestrian Throughway is maintained on sidewalks of open spaces, and a continuous four-foot Pedestrian Throughway is maintained on shared streets and alleys; and where fire access throughways are maintained (if required).

CONSIDERATIONS

6.15.5 Residential Building Design

The design of residential buildings should respond to the different characters of the streets that they face. On Major Streets like Georgia Street or Maryland Street, the ground floor can be more urban and vertical in nature, with double-height insets appropriately scaled to these larger Streetwalls.

On Minor Streets, such as Louisiana and Delaware streets where the streetwall is lower and lanes are narrower, residential character can be articulated as townhomes or individual units. Frontages here might include bay windows and wood siding, similar to those in other lower-scale neighborhoods in San Francisco.

6.15.6 Planting



The placement of planting between stoops and entryways should be considered on Neighborhood Residential Streets as a way to create a softer building edge and a more residential feel to the streets, as a contrast to the hardscape of Neighborhood Commercial and Mixed Use Streets (see Figure 5.1.1 for Street Types).



Stoops and planted edges may encroach up to four feet into the adjacent sidewalk to create a softer street-edge for residential buildings.



Stoops create a comfortable, intermediate social space between the public realm of the street and the private realm of a residence.

6.16 Active Use Character

Wherever buildings are required to have Active Use frontages and do not have lobbies, units, PDR, or retail uses, their ground floors will be characterized by a range of other active uses that bring activity and transparency to street edges.

The Active Use designation encompasses a wide variety of uses to allow for flexibility and variety, so long as the requirement for a high degree of transparency is met, to ensure that they will contribute to the life of the streets they face.

At the Power Station, the Active Use designation permits even more flexibility than in other parts of San Francisco, to allow for a greater mix of different types of uses (such as allowing retail to be mixed with greater amounts of office or PDR space). By allowing for a greater mix of uses, these frontages can be flexible and supportive of a dynamic ground floor, where manufacturing, sales, and business management can all be accommodated in a smaller footprint.

Where office and PDR uses exist alongside Retail uses, the uses more active in nature, such as the Retail and PDR uses will be oriented towards the street, to give the street a social edge with opportunities for the public to interact with these ground-floor uses.

transparency as retail frontages, they are also an opportunity to enliven the edges of buildings facing onto sidewalks and open spaces. The flexibility of the Active Use designation encourages an interesting and dynamic mix of uses. For community uses, consider spaces that allow pre- and post-function conversations to spill out into the street.

Because Active Uses will be designed with the same level of

Figure 6.16.1 Active Use Character







Where offices are located in active use frontages, social spaces should be oriented toward the street.

Outdoor seating areas and pre- and post-function spaces directly outside of community facilities creates space for conversations and events to spill out of the building, allowing the community use to engage and activate the public realm.

CONSIDERATIONS

6.16.1 Frontages for Wellness and Gathering

Active Use frontages present an opportunity for building amenities that focus on wellness and provide physical spaces for residents and employees to gather as a community in residential and non-residential buildings alike. Examples of well-used spaces that are supportive of wellness and gathering are kitchens, lounges, meeting/dining/game rooms, fitness rooms, and bicycle storage rooms that are well designed and accessible to the street. Per Section 3.2.4, such spaces may not occupy more than 50 percent of a building's required Active Use Frontage zone.

6.16.2 Frontages for Community Uses

For community uses in particular, ensure that the design of the outdoor areas in front of these frontages convey a welcoming character and facilitate opportunities for lingering and social interaction. Consider larger doorways, indoor or outdoor spaces for pre- and post-function conversations, and benches for additional seating.

BUILDINGS

[This page intentionally left blank.]

Building Experience and Operations

A complete neighborhood is a pleasant experience, not only for visitors and passersby, but also for residents and building occupants.

Attention is turned to building performance and operations in this section, where standards and guidelines are provided for human wellness, recycled water, thermal energy, rooftops, and parking for bicycles and vehicles alike.

6.17 Sustainable Buildings and Human Wellness

While the development embraces its industrial past as a power station, it facilitates a sustainable, healthy future through building standards that prioritize human health and wellness and reduce material, water, and energy waste.

The following pages articulate strategies that help reduce greenhouse gas emissions ("GHG"), which according to the Environmental Protection Agency are the most significant driver of observed climate change since the mid-20th century; Reducing GHGs help facilitate a sustainable future for the environment while also prioritizing human health and wellness. New infrastructure will take advantage of the mix of uses on site, allowing parcels to work together to save water and energy. Certain residential buildings, which generate more graywater than they can use, could host graywater systems to provide c water for flushing, irrigation, and cooling for all building types. Commercial and Laboratory buildings could capture the waste heat generated from their cooling processes and re-use this for heating and/or domestic hot water production in residential buildings. Each of the building types on the site could turn their 'waste' into a resource for districtwide water and energy savings.

The implementation of measures to reduce GHG emissions, including shared thermal energy plants and all electric buildings for building heating and cooling needs, shall be determined by a number of factors including future utility rates, building design and feasibility as determined by the Project Sponsor.

STANDARDS

6.17.1 Building Performance

All buildings are required to achieve a certification of LEEDv4 Gold or better.

6.17.2 Building Pollutant Control

The use of toxic compounds as identified by the 2016 California Green Building Code is prohibited in all buildings.

6.17.3 Recycled Water

The Potrero Power Station Special Use District (SUD) will pursue one of the following two options for complying with the City's Non-Potable Water Ordinance, which requires non-potable water sources for flushing and irrigation:

Option 1

Graywater, water captured from sources such as laundry, showers, rain water, and foundation drainage, collection and treatment plants will treat graywater generated within certain development blocks to San Francisco Health Code Article 12C water quality standards and deliver to development parcels through a new, private, non-potable water distribution system within the public right-of-way. See Figure 6.17.1. (Note that a minor encroachment permit from the Department of Public Works and an exemption from the Recycled Water Ordinance from the SFPUC would be required under Option 1).

If private graywater plants are incorporated into the SUD, the best candidates for graywater collection and treatment are Blocks 1, 5, 6, 7, and 8 (see Figure 6.17.1); these blocks are planned for residential land use, which generates the largest amount of graywater on site. The number of graywater plants incorporated

into the SUD shall meet the need of district-wide nonpotable demands for flushing and irrigation. If graywater collection and treatment in the blocks identified above do not meet the district-wide needs, additional residential buildings shall incorporate graywater collection and treatment (likely Block 13).

The treatment plants shall treat graywater to San Francisco's non-potable standard. Pumps required to maintain pressurization in graywater collection lines and/or non-potable water distribution lines will be provided by the vertical developer as necessary.

Option 2

In the event that the City constructs a regional non-potable water facility that provides non-potable water to the project site, the SUD may elect to connect to this system, delivering non-potable water to development parcels through a new, public, non-potable water distribution system within the public right-of-way. In this case, the Power Station SUD would not construct separate graywater diversion, treatment and reuse systems on private parcels.

Figure 6.17.1 Recycled Water Option 1



CONSIDERATIONS

6.17.4 Shared Thermal Energy Plants

The project may elect to construct shared thermal energy plants within the project site if the project sponsor determines that such a system would be feasible. These plants would use shared thermal energy plants within the project site to recover waste heat from commercial buildings for heating and cooling use in residential buildings to reduce the project's overall energy and water demands. A connection would be provided between residential and commercial building pairs when (1) such pairing occurs, and (2) a connection can be made without crossing a public right-of-way.

Anticipated residential-commercial pairings include Blocks 1 and 2; 3 and 4; 6 and 10; 7 and 11; and 8 and 12. See Figure 6.17.2. If any of the residentialcommercial pairings do not occur as anticipated due to a change in land use within a flex parcel, there will be no requirement to implement a shared thermal energy plant within that pairing.

Shared thermal energy plant equipment installed in commercial buildings would include heat recovery cooling equipment such as heat recovery chillers to provide excess hot water to the adjacent residential buildings for space heating and domestic hot water production. Residential buildings would install space heating and domestic hot water equipment capable of utilizing the hot water provided by the adjacent commercial building.

If construction of shared thermal energy plants in residential building precedes construction of the commercial building, temporary provision of hot water for space heating and domestic hot water would be

provided. In the case of this temporary provision, electric or natural gas may be used to produce hot water.

6.17.5 Electric Building Heating and Cooling

Any building in the project may elect to eliminate the use of natural gas for space heating and domestic water use, which would reduce operational GHG emissions and limit on-site combustion. During the design of the mechanical system for each building, the feasibility of systems that provide for all-electric space heating and domestic hot water production shall be explored. However, future utility rates and the impact on affordability will be considered as part of the determination of feasibility made by the developer for using all-electric systems for building heating and cooling.

6.17.6 Recycled Water

Consider using recycled water for cooling systems.

6.17.7 Energy for Emergencies

Consider providing battery storage to support on-site renewable energy generation and resiliency during emergencies.

6.17.8 Natural Ventilation

The San Francisco climate is particularly well-suited to natural ventilation, with moderate outdoor air temperatures that are typically in a comfortable range. Buildings that are naturally ventilated deliver the cobenefits of fresh air for occupants, reduction in energy needed to condition outdoor air, and greater resilience in the case of energy blackouts. Consider using operable windows and/or HVAC systems that allow for natural ventilation.

6.17.9 Natural Daylight

Passive lighting and access to natural daylight should be used where possible. Access to natural daylight can improve physical energy, performance, and overall human health. Artificial lighting can be one of the largest demands on building energy. By enhancing access to natural daylight, buildings can better serve both occupants and the environment.

6.17.10 Solar Shading




Façades that are south- or west-facing can be exposed to greater amounts of thermal energy from the sun, causing heat-gain to the building and requiring additional energy for cooling. Consider using passive means of shading these building facades. Examples include louvers, eaves, and use of more solid wall and less glazing.

6.17.11 Active Design



Buildings that are designed to prioritize the use of stairs help support healthy habits and increase the likelihood of chance encounters between building occupants. Where appropriate, feature stairs as the main path of circulation. Locate communal spaces like kitchenettes and lounges near stair landings to draw occupants to the stairs, for convenience and community. Encourage the active use of rooftops and the construction of spaces that support the recreational use of rooftops.

Figure 6.17.2 Thermal Energy System

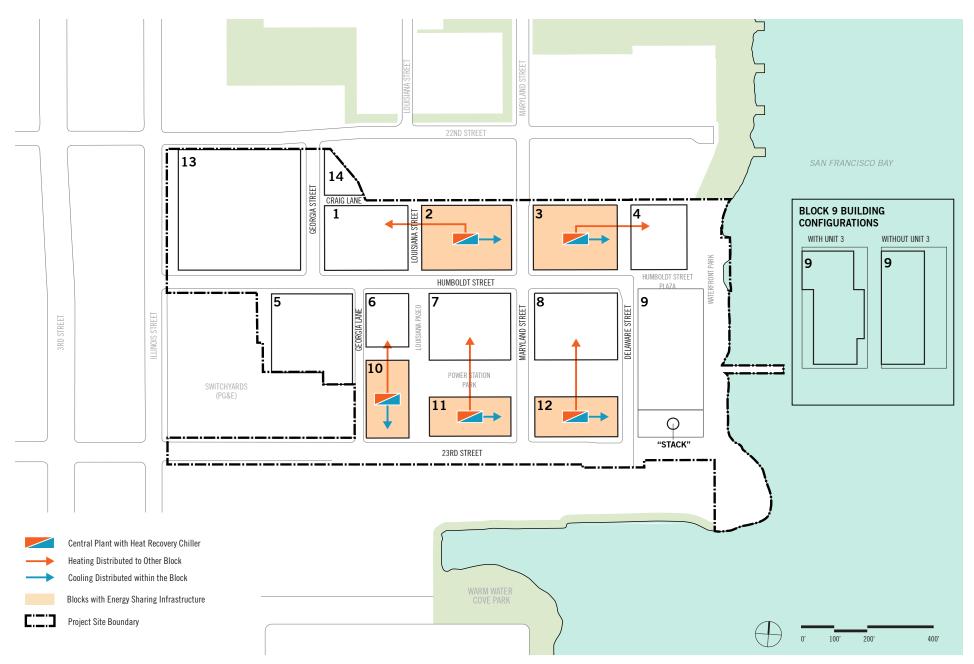

6.17.12 Biophilic Design

Research suggests that humans possess an innate tendency to seek connections with nature. Since most people spend 90 percent of their time indoors, biophilic design -- such as incorporating greenery, green spaces, or views to such spaces when indoors -- helps satisfy our desire to affiliate with nature in buildings. Biophilic design can serve as an amenity that also contributes positive health benefits. Where possible, provide access to landscaped roof gardens and/or balconies. In the design of these spaces, consider creating microclimates that are supportive of planting, with protection from wind and adequate sun for planting to thrive.

6.17.13 Building Amenities for Wellness

Building amenities that address wellness can be appealing for residents, visitors, and employees. Examples of amenities that support wellness in residential or commercial buildings are:

- Fitness rooms that are close to and visible from an outdoor space, so that people have the choice of incorporating outdoor exercise.
- Collaborative or conference spaces that can also accommodate informal fitness classes, meditation groups, or other fitness-related activities.
- In residential buildings: wellness facilities such as steam rooms, saunas, and jacuzzies.
- Rooftop open spaces and enclosed space related to the recreational use of the roof.

6.17.14 Family Friendly Design

Buildings should consider amenities that address the needs of families, such as lobbies with storage for strollers, shopping carts, and convenient car seat storage for families that do not own cars.

6.17.15 Pet Friendly Design

Residential buildings should consider dogs and their owners in the design of amenities. Dog runs, pet wash facilities and pet relief areas should be considered and incorporated into building programming where possible.



Building Atrium with Communal Spaces and Circulation Stairs



Interior Green Wall

6.18 Building Rooftops

Rooftops should be designed to maximize energy generation, stormwater management, and greening, as well as use and enjoyment. In addition to providing such benefits as stormwater management and biodiversity, Living Roofs, as defined below, can also enhance usable open spaces located on the roof.



A green roof with native plantings for a pollinator habitat. Image from the *Living Roof Manual*, a valuable resource for green roof design and planting.

STANDARDS

6.18.1 Better Roofs

Buildings shall meet *Planning Code Section 149*, *Better Roofs: Living Roof Alternative Ordinance* by meeting one of the following standards:

- At least 15 percent of the total roof area of each building or total project (as defined on page 7) shall be overlaid by solar energy or heating systems (including photovoltaic ("PV") panels); or,
- At least 30 percent of the total roof area of each building or total project (as defined on page 7) shall be a Living Roof, as defined below.

A Living Roof is defined as the media for growing plants, as well as the set of related components installed exterior to a facility's roofing membrane. "Living Roof" includes both "roof gardens" and "landscaped roofs" as defined in *Planning Code Section 149*.

All building rooftops shall also comply with the *San Francisco Green Building Code* section on Renewable Energy and Better Roofs.

The above standard allows for the overall project to meet the Better Roofs requirements (rather than on a building by building basis), in order to allow for a comprehensive approach to the district roof-scape, and to create meaningful greening through habitat-supportive planting and stormwater management. Living Roofs will be most effective on rooftops that are visible from taller buildings, and/or rooftops where a Living Roof can contribute to meeting building stormwater management requirements.

See Table 6.18.1 for recommendations for where to locate solar energy or heating systems versus living roofs.

6.18.2 Living Roof Non-Potable Irrigation



Plant palettes selected for Living Roofs shall accommodate the site-wide requirement that all irrigation must use non-potable water.

CONSIDERATIONS

6.18.3 Photovoltaic Panels

Portions of the roof area with direct solar access should be considered for solar energy or heating systems (including PV panels). Wherever possible, mount solar energy or heating systems over mechanical equipment, on structures over Living Roofs, or structures used for human shading. Where solar energy or heating systems are combined with living roof area, incorporate shade tolerant species beneath solar energy or heating systems structures.

6.18.4 Living Roof Permanent Irrigation



Consider subsurface irrigation and weather or moisturebased controllers for permanent irrigation systems.

6.18.5 Living Roof Pollinator Habitat



Where possible, design living roofs to support pollinator habitat. Select brightly colored, native plants that flower across at least three seasons. Target a minimum planting area of 20 square feet with access to full sun.

6.18.6 Living Roof Uses



In addition to providing opportunities for open space, living roofs provide sustainable and ecological benefits including passive cooling for buildings, stormwater management, and opportunities to incorporate nature into the building for bio-diversity and biophilia. Some additional uses to consider for green roofs include: urban agriculture, native gardens providing bird and insect habitat, and community gardens.

Table 6.18.1 Better Roofs Recommendations

BLOCK NUMBER	RECOMMENDED APPROACH TO BETTER ROOFS STANDARDS (PERCENTAGES BELOW REFLECT MINIMUM AREAS)				
1	30 percent Living Roof located on the Base				
2	15 percent Photovoltaics				
3	15 percent Photovoltaics				
4	30 percent Living Roof				
5*^	15 percent Photovoltaics located on the Base				
6*	15 percent Photovoltaics located on the Base				
7*	30 percent Living Roof located on the Base				
8	30 percent of the Base for Living Roof and 15 percent of the Upper Building for Photovoltaics				
9	30 percent Living Roof				
10^	30 percent Living Roof				
11	30 percent Living Roof				
12	30 percent Living Roof				
13^	30 percent Living Roof				
14	30 percent Living Roof				
THE STACK	N/A				

^{*}Remaining percentage of roof area required to meet Better Roofs can include any combination of Living Roof or Photovoltaics on the Upper Building or Base, provided that the building complies with the Standards listed above.

[^]All percentages reflect minimum roof areas, however, Living Roof percentages on Blocks 5, 10, and 13, in particular, may exceed 30 percent to address stormwater management requirements pursuant to the SFPUC Stormwater Management Ordinance (SMO).

6.19 Off-Street Parking and Loading

STANDARDS

6.19.1 Building Address

The address of a building serves as the main drop-off point for vehicles and the location to which emergency vehicles are called. Building addresses should be located in proximity to vehicle drop-off areas and fire stand-pipes. The main building entrance shall be located on any of the frontages indicated in Figure 6.19.1.

6.19.2 Off-Street Parking

Parking is permitted on all blocks as an accessory use. With the exception of the above-grade District Parking Garage, parking at or above the ground level shall be entirely screened from all public rights-of-way in a manner that accentuates ground floor uses, minimizes mechanical features and is in keeping with the overall massing and architectural vocabulary of the building. Along Active Use frontages, as shown in Figure 3.2.1, parking facilities must also be lined with active uses to a depth of at least 25 feet.


Accessory parking is permitted up to the following maximum ratios and may be provided on a different parcel than the principal use:

- 0.6 cars parked per dwelling unit;
- 1 car parked per 1,500 square feet of Non-Retail Sales and Service, Industrial, PDR, Laboratory, or Life Science Uses:
- 3 cars parked per 1,000 square feet of Grocery Store; and
- 1 car parked per 16 hotel guest bedrooms plus 1 car parked for a hotel manager.

Parking for uses not listed above is not permitted. Each of the above cars parked may be accommodated in an independently accessible parking space.

Below grade parking is permitted where off-street parking is allowed. While below grade parking shall not extend beneath public rights-of-way, it may extend beneath open spaces, shared public ways at Delaware and Louisiana Streets, as well as Craig Lane, which are private streets.

6.19.3 Electric Vehicle Charging



At least 25 percent of off-street passenger vehicle parking spaces in Residential buildings shall be equipped with EVSE.

6.19.4 Car Share

Buildings shall provide dedicated car share parking as required by *Planning Code Section 166*, as shown in Table 6.19.1.

6.19.5 Parking and Loading Entrances

Building entrances for parking garage and loading dock access are allowed only on those frontages indicated in Figure 6.19.2.

With exceptions as noted in this section no more than 22 feet of any given street frontage of a new or altered structure parallel to and facing a street shall be devoted to parking and loading ingress or egress. Entrances to off-street parking shall be located at least 30 feet from any lot corner at the intersection of two public

 Table 6.19.1
 Required Car-Share Parking Spaces

NUMBER OF RESIDENTIAL UNITS	NUMBER OF REQUIRED CAR-SHARE PARKING SPACES
0 - 49	0
50 - 200	1
201 or more	2, plus 1 for every 200 dwelling units over 200
NUMBER OF PARKING SPACES PROVIDED FOR NON-	NUMBER OF REQUIRED CAR-SHARE PARKING
RESIDENTIAL USES OR IN A NON-ACCESSORY PARKING FACILITY	SPACES
NON-ACCESSORY PARKING	SPACES 0
NON-ACCESSORY PARKING FACILITY	

rights-of-way, unless such location is infeasible given requirements imposed by the Department of Public Works or the San Francisco Fire Department during the Street Improvement Permit process.

Building openings and curb cuts dedicated to parking and loading access shall be minimized. Entrances for off-street parking and off-street loading shall be combined where possible. The placement of parking and loading entrances should minimize interference with street-fronting active uses and with the movement of pedestrians, cyclists, public transit, and vehicles. Off-street parking and loading entrances shall be located to minimize the loss of on-street parking and loading spaces.

Exceptions

A) In the case that a grocery store is provided, the following exceptions apply to the building containing such grocery store:

- A loading bay may be located at the building corner, as long as: 1) it is designed to minimize visibility of loading activities from the street; and 2) the corner of the building is given an equivalent level and quality of design as a typical corner of a building.
- Separate loading dock and parking garage entries may be provided such that the loading dock entry may be no more than 35 feet in width and the parking garage entry may be no more than 22 feet in width.
- Driveways into loading docks may be up to 60 feet in width or greater, to accommodate turning movements of a WB-67 truck.

B) Blocks 2 and 3 are envisioned to house Laboratory/ Life Science uses, known to have greater off-street loading requirements. For these buildings, the following exceptions apply:

- Loading dock entries may be provided such that the driveway into the loading dock may be up to 34 feet in width, to accommodate the turning movements of an SU-30 truck.
- Separate loading dock and parking garage entries may be provided such that the loading dock entry may be no more than 22 feet in width and the parking garage entry may be no more than 22 feet in width.

6.19.6 On- or Off-Street Loading

Freight loading shall be provided per building at the ratios shown in Table 6.19.2. Freight loading may be

Table 6.19.2 Freight Loading Requirements

LAND USE	SQUARE FEET	NUMBER OF FREIGHT LOADING SPACES
	0 - 10,000	0
Retail Sales and Services,	10,001 - 30,000	1
Except as Listed Below	30,001 - 50,000	2
	over 50,000	1 space per 25,000 square feet of occupied floor area
	0 - 10,000	0
PDR, Industrial	10,001 - 50,000	1
	over 50,000	0.21 spaces per 10,000 square feet of occupied floor area
	0 - 100,000	0
	100,001 - 200,000	1
Hotel, Residential, Office	200,001 - 500,000	2
	over 500,000	3, plus 1 space for each additional 400,000 square feet of occupied floor area

accommodated off-street or within the permitted onstreet loading or parking zones as depicted in Figure 5.9.1 regarding curb management. Off-street parking and loading is also permitted within building frontages of the Block 13 mid-block alley. On-street loading may require time management of deliveries and occur in onstreet parking stalls as managed by the adjacent building manager or the Master Association.

At least one off-street loading space shall have a minimum width of 10 feet, a minimum length of 25 feet, and a minimum vertical clearance, including entry and exit. of 12 feet. The substitution of two service-vehicle

spaces for each required off-street freight loading space may be made, provided that a minimum of at least one required off-street freight loading space is provided.

Each substituted service-vehicle space shall have a minimum width of eight feet, a minimum length of 20 feet, and a minimum vertical clearance of seven feet.

Figure 6.19.1 Building Address Frontages



Figure 6.19.2 Off-Street Parking and Loading Frontages



6.20 Bicycle Parking

Bicycle parking is divided into two different classes of parking spaces. Class I spaces are located in secure, weather-protected facilities, intended for use as long-term, overnight, and work-day bicycle storage by dwelling-unit residents, non-residential occupants, and employees. Class II spaces are located in a publicly accessible, highly visible location, intended for transient or short-term use by visitors, guests, and patrons to the building or use.

Bicycle parking spaces are generally in the form of lockers or racks. Bicycle lockers can be used to satisfy the requirements for Class I bicycle parking and bicycle racks can be used to satisfy Class II bicycle parking. Bicycle racks located in a locked area or attended facility can also satisfy the requirements of Class I bicycle parking.

STANDARDS

6.20.1 Bicycle Parking Ratios

Class I and Class II bicycle parking spaces shall be provided per building in the minimum quantities listed in Table 6.20.1 based on land use. See Section 5.4.1 in the Streets Chapter for preferred Class II bicycle parking locations and design controls.

6.20.2 Design Standards for Class I Spaces

Class I spaces shall protect the entire bicycle, its components and accessories against theft and inclement weather, including wind-driven rain. Acceptable forms of Class I spaces include:

- Individual Lockers
- Attended Facilities
- Monitored Parking
- Restricted Access Parking
- Bicvcle Cages / Rooms
- Stacked Parking

Stacked Parking spaces may be used to satisfy any Class I required space. However, Class I spaces shall not require manually lifting the entire bicycle more than three inches to be placed in the space, except for Vertical Bicycle Parking.

Doors accessing bicycle parking facilities shall have mechanical openers for ease of access.

6.20.3 Location Standards for Class I Spaces:

Class I spaces shall be located with direct access for bicycles without requiring the use of stairs. The location of such spaces shall allow bicycle users to ride to the entrance of the space or the entrance of the lobby leading to the space. The design shall provide safe and convenient access to and from bicycle parking facilities. Safe and convenient means include, but are not limited to, ramps and wide hallways as described below. Escalators and stairs are not considered safe and convenient means of ingress and egress and shall not be used. Use of elevators to access bicycle parking spaces shall be minimized for all uses and if necessary shall follow the requirements below. Class I bicycle parking spaces shall be located in one of the following:

- A) On the ground floor within 100 feet of the major entrance to the lobby there shall be either: (i) convenient access to and from the street to the bicycle parking space and another entrance from the bicycle parking space to the lobby area, or (ii) a minimum four foot wide hallway or lobby space that leads to the bicycle parking major entrance, where direct access to bicycle parking space from the street does not exist.
- **B)** In the off-street automobile parking area, where lot configurations or other limitations do not allow all bicycle parking spaces to be located near the lobby as described in subsection (A) above: bicycle parking spaces shall be located on the first two levels of automobile parking either above or below grade and still be located near elevators or other pedestrian entrances to the building.
- **C)** Where the two options above will not be possible due to an absence of automobile parking or other unique limitations: ramps or elevators shall be provided to access the bicycle parking space and the bicycle parking spaces shall be near the elevators or other entrance to that level. At least one designated access route meeting

the dimensional requirements described in (A) above shall connect a primary building entrance to the bicycle parking facility. For non-residential uses, any elevator necessary to access bicycle parking facilities larger than 50 spaces shall have clear passenger cab dimensions of at least 70 square feet and shall not be less than seven feet in any dimension.

6.20.4 Design Standards for Class II Spaces Class II spaces shall meet the following design

Class II spaces shall meet the following design standards:

- **A)** Bicycle racks shall permit the locking of the bicycle frame and one wheel to the rack with a U-lock without removal of the wheel, and shall support the bicycle in a stable, upright position without damage to wheels, frame or components. Class II spaces are encouraged, but not required, to include weather protection, as feasible and appropriate.
- **B)** The surface of bicycle parking spaces need not be paved but shall be finished to avoid mud and dust.
- **C)** All bicycle racks shall be securely anchored to the ground or building structure, with tamper-resistant hardware.
- **D)** Bicycle parking spaces may not interfere with pedestrian circulation.
- **E)** All bicycle racks within the public right-of-way shall comply with SFMTA bicycle parking standards; non-standard spaces shall receive SFMTA approval.

 Table 6.20.1
 Bicycle Parking Minimum Ratios

LAND USE	CLASS I CODE REQUIREMENTS	CLASS II CODE REQUIREMENTS
Residential	100 Class I spaces, plus one space per four units over 100 units	One Class II bicycle parking space per 20 units
Office	One Class I space per 5,000 square feet	Two Class II spaces, plus one space per 50,000 square feet in excess of 5,000 square feet
Laboratory (Uses Industrial Requirements)	One Class I space per 12,000 square feet	Minimum of two Class II spaces; four spaces for any use larger than 50,000 square feet
Retail	One Class I space per 7,500 square feet	Two Class II spaces, plus one space per 2,500 square feet up to 50,000 square feet (additional guidelines for larger or personals services retail types)
Hotel	One Class I space per 30 rooms	One Class II space per 30 rooms, plus one Class II space per 5,000 square feet of conference space
PDR (Uses Industrial Requirements)	One Class I space per 12,000 square feet	Minimum of two Class II spaces; four spaces for any use larger than 50,000 square feet
Garage		One Class II space per 20 car spaces
Community Facility	Two Class I spaces, plus one space per 5,000 square feet in excess of 10,000 square feet	Two Class II spaces, plus one space per 2,500 square feet in excess of 5,000 square feet
Restaurant	One Class I space per 7,500 square feet	Two Class II spaces, plus one space per 750 square feet in excess of 1,500 square feet

Source: San Francisco Planning Code Section 155, Table 155.2

6.20.5 Location Standards for Class II Spaces

Class II spaces shall be located, as feasible, near all main pedestrian entries to which they are accessory and should not be located in or immediately adjacent to service, trash, or loading areas.

All uses may locate Class II bicycle parking in a public right-of-way, such as in a sidewalk furnishing zone or in place of an on-street vehicle parking space. If existing Class II bicycle parking in the required quantities already exists in a public right-of-way immediately fronting the subject lot, and such spaces are not satisfying bicycle parking requirements for another use, such parking shall be deemed to meet the Class Il requirement for that use. Parking meters, poles, signs, or other street furniture shall not be used to satisfy Class II bicycle parking requirements, unless other public agencies have specifically designed and designated these structures for the parking of a bicycle.

If located within a public right-of-way (refer to Figure 5.4.1.), the location of bicycle racks shall follow requirements outlined in SFMTA Bike Parking: Standards, Guidelines and Recommendations, and as outlined below:

- Prior to issuance of the first architectural addenda. the Project Sponsor must coordinate installation of on-street bicycle racks with the SFMTA Bike Parking Program;
- Class II bicycle parking shall be located within 100 feet from the primary entrance of a building.

Non-residential uses other than non-accessory garages and parking lots, may locate Class II spaces in required non-residential open space, provided that such bicycle parking does not occupy more than five percent of the open space area or 120 square feet, whichever is greater, and does not affect pedestrian circulation in the open space.

6.20.6 Bicycle-Supportive Amenities

Additional required bicycle-supportive amenities include the following:

- A bicycle fix-it station shall be provided within each residential and commercial building.
- For non-residential buildings, shower facilities and lockers shall be provided, as per the minimum quantities shown in Table 6.20.2.

Table 6.20.2 Required Bicycle-Supportive Amenities

	Occupied Floor Area	Minimum Shower Facility & Lockers Required
	Greater than 10,000 SF, but less than 20,000 SF	1 shower and 6 clothes lockers
Non-Residential, (Except Retail Sales and Services Uses)	Greater than 20,000 SF but less than 50,000 SF	2 showers and 12 clothes lockers
,	Greater than 50,000 SF	4 showers and 24 clothes lockers
B. W. C. L.	Greater than 25,000 SF but less than 50,000 SF	1 shower and 6 clothes lockers
Retail Sales and Services Uses	Greater than 50,000 SF	2 showers and 12 clothes lockers

6.21 District Parking Garage

Car ownership has been steadily declining in San Francisco, and this trend is expected to continue as public transportation improves and ride-hailing and other technology changes the way people use cars. The Power Station plans to address this by reducing the amount of parking built into each individual building, and consolidating much of the parking on site into a single district parking garage. If provided, this garage could be shared by residents, employees, and visitors to the site. This approach provides the following benefits:

- Locating the parking garage toward the western end of the site will capture vehicles as they enter the site, reducing the presence of automobiles within the site.
- Combining parking into a dedicated facility allows for economies of scale and efficient parking design.
- Economies of scale will help leverage the latest technologies in parking management, ones that may facilitate sharing parking between different uses, dynamic pricing for demand management, provide real-time information about parking availability, and make electric vehicle charging available to any users of the parking garage.
- Centralizing parking in a district garage could encourage people to use sustainable modes of transportation such as walking, biking, and transit, as well as activate retail and community facilities.
- Should the demand for parking decrease substantially over time, the garage could serve as a future development site or be converted into a different use.

STANDARDS

6.21.1 District Parking Garage Location

A district parking garage is permitted but not required and may be located at one of the locations as shown in Figure 6.21.1.

Block 5 is the preferred location. Locating a district parking garage on Blocks 1 and 13 would only be explored in the event that one in Block 5 is not reasonably feasible.

6.21.2 Parking Garage Height

The maximum height of the district parking garage is 90 feet.

6.21.3 Maximum Parking Ratio



All parking located in the district parking garage is accessory to other uses on the site. As such, the maximum amount of parking that can be located in this garage is subject to the parking maximums for the project as built, less the parking that is developed in each individual building. See Section 6.19.2 for parking ratios, and Section 6.19.3 for electric vehicle charging requirements.

6.21.4 Rooftop Soccer Field



The rooftop of the district parking garage shall be used as a publicly accessible soccer field. One structure of up to 5,000 square feet is permitted, but not required, for use as equipment storage, a food kiosk, and other uses accessory to a soccer field. (See Section 6.2.4 for the maximum height of structures and lighting on rooftops.)

Public access shall be provided by elevator and stair to the field during hours of public use. Signage that is clearly visible shall be posted, directing the public to the soccer field, and indicating its hours of operation and

means of access. See Section 7.4.11 for requirements for Public Facilities and Open Space Signage.

A public restroom shall be provided in or on the same building as the rooftop soccer field.

6.21.5 Visual and Physical Connectivity

To enhance safety for users inside the garage, the district parking garage shall allow for lines of sight into and through the building from the adjacent sidewalks and/or open spaces. The ground floor of the parking garage shall be at least 75 percent visually transparent or physically permeable.

There shall be at least one walkway connecting through the building at grade between any streets or alleys. For each of the possible locations of the parking garage, if selected, the following respective walkway connections are required:

- Block 1: a north-to-south pedestrian connection between Craig Lane and Humboldt Street.
- Block 5: an east-to-west pedestrian connection between Georgia Lane and the access lane east of Block 5.
- Block 13: either an east-to-west connection between Georgia Street and a north-to-south midblock connector: or a north-to-south connection between Humboldt Street and an east-to-west midblock connector.

Figure 6.21.1 District Parking Garage: Possible Locations and Dimension



6.21.6 Architectural Modulation and Articulation

The parking structure shall be designed to be consistent with the standards and guidelines described in Section 6.6 Building Modulation and Section 6.7 Façade Articulation.

6.21.7 Façade Screening

The parking structure shall be architecturally or artistically screened, and designed with attention to detail compatible with adjacent buildings. Exposed façades are an ideal location for interpretive elements, public art, or green walls. Also see Section 2 for site approaches to interpretation and wayfinding.

GUIDELINES

6.21.8 Flat Floor Slabs

Floor slabs that are set at a slope, such as speed ramps, shall not be expressed at the façade of the parking structure. Where they occur, they shall be visually screened. Floor slabs visible from the street must be flat.

6.21.9 Ground Floor Materials

Higher quality building materials should be emphasized in the façade design at the ground floor, as well as at pedestrian touch points and in circulation areas. Section 6.8 addresses color and materials.

6.21.10 Light Trespass

Light spillage from within the parking structure should be minimized. Indirect lighting should be used to light interior areas of the garage visible to the exterior. Parapet edges of the parking trays should be higher than vehicle headlights to screen adjacent properties.

CONSIDERATIONS

6.21.11 Design for Adaptive Reuse



6.21.12 Wayfinding

adaptive reuse is possible

Take opportunities to be playful and creative with wayfinding and environmental graphics, particularly those directing the public to the rooftop soccer field. (See also Section 2.)



A sculptured, faceted façade creates depth and interest.



Louvers create a shifting pattern across the façade, and modulate scale. They also redirect light from the headlights of cars to create a dynamic building when in use.



This parking garage contributes to the activity of the street with ground floor active uses and a colorful, large-scale mural.



Living walls can transform a parking garage into a vertical garden.



Environmental graphics can be used as a way to enhance the design of the garage while also providing effective wayfinding.



This popular soccer field sits on the rooftop of a parking garage.

[This page intentionally left blank.]

Section 7 LIGHTING AND SIGNAGE

/.1	Site Lighting	304
7.2	Street Lighting Design	308
7.3	Building Lighting	312
7.4	General Signage	314
7.5	Wayfinding and Interpretive Signage	316



Lighting

A hierarchy of lighting types and strategies will work together to create a warm, inviting, and safe nighttime environment at the Power Station, while minimizing light pollution for site residents and neighbors.

Lighting at the Power Station will be an important component of the public and private realm design, reinforcing the connectivity and cohesiveness of the district, while responding to the functional criteria and unique character of open space, streets, and buildings.

7.1 Site Lighting

While minimum lighting requirements will satisfy safety and security functions, special considerations around nighttime identity, pedestrian wayfinding, and unique project conditions will be key aspects of the lighting approach.

Practical lighting concerns should be supplemented with artful, inviting, and engaging lighting strategies and installations.

Lighting across the site will be scaled to the pedestrian and bicycle experience reinforcing key pedestrian routes and open spaces.

Given the project's location, special consideration will be given to light pollution reduction strategies and dark sky measures to mitigate the project's effects on the ecology of the Bay.

For Rooftop Soccer Field lighting standards, see Section 6: Buildings.

STANDARDS

7.1.1 Light Pollution Trespass and Glare



Lighting strategies shall minimize glare, light trespass outside the development, and light pollution in areas adjacent to residential buildings and along the waterfront. Backlight, Uplight and Glare (BUG) ratings of exterior fixtures shall meet the criteria established in the current California Green Building Code such as CALgreen.

7.1.2 Energy-Efficient Lighting Fixtures



Lighting fixtures and bulbs shall meet or exceed applicable energy-efficiency standards and/or use solar power.

Pedestrian Scale Lighting 7.1.3

Lighting shall be designed to allow facial recognition along paths of travel and scaled to the pedestrian and bicycle experience across the public realm. Lighting shall not create glare or "hot spots" that would inhibit visual acuity, and shall facilitate sight lines, allowing the perception of safety across the public realm. Notwithstanding the foregoing, the SFPUC may waive facial recognition requirements for the lights directly adjacent to the water. Lighting shall also prevent unnecessary vertical transmittance of light. On Streets, light levels shall meet SFPUC standards.

7.1.4 Lighting Design Intention

Lighting uniformity ranges in open spaces shall allow for variation in light levels to create hierarchy and a range of experiences. Lighting shall reinforce key pedestrian circulation routes and connections. Lighting strategies shall incorporate varied fixture types and ambient light from buildings, particularly in high-active retail zones

where retail spaces will provide ample ambient light for pedestrian paths. Use a variety of lighting types, scaled to reinforce active street life and open space experiences. Bollard, pole, mast, and in-grade lighting are allowed.

GUIDELINES

7.1.5 Projected Light

Projected light through a tree canopy ("moonlighting") and through special filters on light fixtures may be used to highlight special places or experiences.

7.1.6 Suggested Light Zones

Light levels and uniformity levels for the public realm are grouped in seven zones (Figure 7.1.1) that suggest a design hierarchy of different lighting identities and their relationship to each other based on place and use(s). (Example images of suggested lighting identity character are in Figure 7.1.2.)

7.1.7 Energy-Efficient Lighting Fixtures

Exterior lighting controls, which may include but are not limited to motion sensing and dimming capability shall also be considered, to allow for additional energy savings as well as preservation of the night sky.

7.1.8 Interactive and Artistic Lighting

Consider special lighting installations that imbue public open spaces with unique visual experiences for visitors. Louisiana Paseo, Stack Plaza, Turbine Plaza, and Humboldt Street Plaza would benefit from a creative lighting approach.

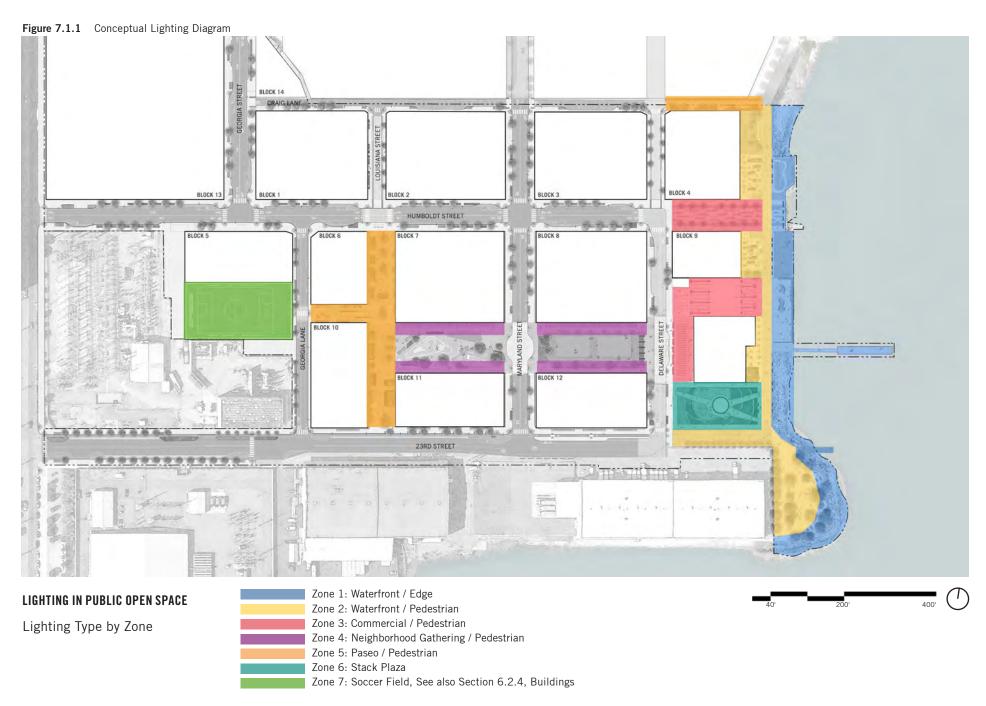


Figure 7.1.2 Lighting Character Images by Zone

Zone 1: Waterfront / Edge



Zone 2: Waterfront / Pedestrian







Zone 3: Commercial / Pedestrian





Zone 4: Neighborhood Gathering/Pedestrian





Zone 5: Paseo / Pedestrian





Zone 6: Stack Plaza



Zone 7: Rooftop Soccer Field



Credit: Mike Ro

Figure 7.1.3 Additional Lighting Character Precedent Images



Creatvie Lighting



Creatvie Lighting



Varied Lighting that Takes Ambient Light into Account



Facade Lighting



Projected Light Installations



Artistic Lighting--Subtle, In-Grade Lights



Feature Lighting that Creates Distinctive Experiences



Artistic, Interactive Lighting

7.2 Street Lighting Design

Lighting at the Power Station will be an important component of the streetscape design, reinforcing the connectivity and cohesiveness of the district, while responding to the functional criteria and unique character of each streetscape .

A hierarchy of lighting types will work together to create a warm, inviting, and safe nighttime environment. Lighting strategies will protect site residents by minimizing light pollution.

Lighting across the site will be scaled to the pedestrian and bicycle experience, reinforcing key pedestrian routes in open spaces, along shared public ways, and along Delaware Street fronting the Waterfront Park.

STANDARDS

7.2.1 Location

Street lighting shall be placed within the furnishing zone of the sidewalk, away from Pedestrian Throughways and Edge Zones, so as not to obstruct pedestrian traffic or the loading / unloading of people and goods.

7.2.2 Light Pollution, Trespass, and Glare See Section 4.11.1. Street lighting shall also comply with Illuminating Engineering Society Standards appropriate for the subject street type.

7.2.3 Energy-Efficient Lighting Fixtures

Lighting fixtures and bulbs shall be LED lights and meet or exceed applicable energy-efficiency standards. In public streets, utilize fixtures from the SFPUC's *Streetlight Catalogue* .

7.2.4 Visual Acuity and Safety

See Section 4.11.3.

7.2.5 Lighting Design Intention

Lighting uniformity ranges in streets shall allow for variation in light levels to indicate the hierarchy of streets and create a range of experiences. Lighting shall reinforce key pedestrian circulation routes and connections. See Figure 5.2.1.

7.2.6 Pedestrian-Scale Lighting

Lighting shall be scaled to the pedestrian and bicycle experience across the public realm; glare shall not be created at eye level. The unnecessary vertical transmittance of light shall be prevented. Light levels shall meet SFPUC standards.

7.2.7 Fixtures

Fixtures within publicly maintained streets shall adhere to SFPUC guidelines and shall be selected from the SFPUC catalogue of acceptable fixtures.

7.2.8 Pedestrian Pole Light

Pedestrian pole lights within publicly maintained streets shall be either Landscape Forms FGP, Landscape Forms Alcott or similar contemporary design from the SFPUC Street Light Catalogue.

Figure 7.2.1 Street Light Fixtures







Street Light Lumec Roadstar 16' to 22' Height

Lumec Roadfocus - 16' to 22' Pole Height







Pedestrian Level Light - Non Public Streets - Landscape forms FGP, Hess Linea or Similar 12' to 16' Pole

Street Lighting Design (continued)

GUIDELINES

7.2.9 Variety of Light Types

See Section 7.1.4.

7.2.10 Projected Light

See Section 7.1.5.

7.2.11 Suggested Light Levels

See Section 7.1.6.

7.2.12 Pedestrian Pole Light Fixtures on Private Streets

Pedestrian Pole lights in private areas, including the portions of Delaware and Louisiana streets that are designated as shared streets, should be chosen for durability and an understated contemporary design. Options include Hess Linea and Landscape forms FGP.

7.2.13 Energy-Efficient Lighting Fixtures

Where applicable, consider smart sensors, which can turn down lighting in response to occupancy.

 Table 7.2.1
 Lighting Zones Chart

PROJECT LIGHTING ZONE	PEDESTRIAN LIGHT LEVEL (FOOTCANDLES)*	ROADWAY MINIMUM MAIN- TAINED AVERAGE LIGHT LEVEL (FC)*	UNIFORMITY RATIO, AVER- AGE/MINIMUM*	
Zone 1: Mixed-Use / Industrial				
23rd Street	0.5 to 1 fc average	0.9 to 1.7 fc Intersections: 1.3 to 1.8 fc	3 to 4	
Zone 2: Retail Street. Opportuni ground-floor uses.	ity for feature lighting; variety of l	ight types encouraged; contributir	ng ambient light from	
Humboldt Street	0.5 to 1 fc average	0.9 to 1.7 fc Intersections: 1.3 to 1.8 fc	3 to 4	
Zone 3: Neighborhood Streets. S should be highly visible.	Some contributing light from grou	nd-floor uses, especially on Bridge	eview Street; intersections	
Georgia Lane	0.4 to 1 fc average	0.6 to 1.2 fc Intersections: 1.3 to 1.8 fc	4	
Georgia Street	0.4 to 1 fc average	0.6 to 1.2 fc Intersections: 1.3 to 1.8 fc	4	
Maryland Street	0.4 to 1 fc average	0.6 to 1.2 fc Intersections: 1.3 to 1.8 fc	4	
Delaware Street	0.5 to 0.8 fc average	0.9 to 1.7 fc intersections: 1.4 to 1.8 fc	4 to 6	
Zone 4: Light based on use; shared public ways have a higher chance of pedestrian conflicts and should be lit as such.				
Craig Lane	0.5 fc	0.4 to 0.7 fc	4 to 6	
Louisiana & Delaware Shared Public Ways	0.5 fc	0.4 to 0.7 fc	4 to 6	

^{*}Source: Better Streets Plan

Figure 7.2.2 Street Lighting Zones



7.3 Building Lighting

Building designs are encouraged to use lighting in innovative and engaging ways with the aim of making the Power Station more attractive and secure, both during the day and at night.

The following standards and guidelines apply to all retail, residential, and commercial building lighting

STANDARDS

7.3.1 Light Trespass

At a minimum, all exterior lighting must be suitable for a given "Lighting Zone" as defined by USGBC and IESNA. It is expected that most of the development area will be LZ3. Lighting zones are defined as follows:

LZ3: Medium (Commercial/Industrial, High Density Residential). No more than 0.20 horizontal and vertical footcandles at the site boundary and 0.10 horizontal foot-candles 10 feet beyond the site boundary. Also, 5% of total initial luminaire lumens are emitted at an angle of 90 degrees above nadir or greater.

Maximum candela values for photometric distributions of interior luminaires shall fall within the building (i.e. not through skylights, windows or other building fenestration).

Each photometric for every luminaire type shall be reviewed for compliance to standards.

7.3.2 Light Pollution

All lighting must be shielded to prevent glare to private and public uses, especially residential units. The angle of maximum candela from each interior luminaire as located in the building shall intersect opaque building interior surfaces and not exit out through the windows.

All new site lighting shall incorporate cut-off control as well as the "Lighting Zone" credit requirements found in the U.S. Green Building Council's LEED v4 for New Construction. All luminaires shall be at least semi-cutoff with non-cutoff types only as permitted subject to review and approval.

Definitions of cutoff control are as follows:

Full cutoff: Zero candela intensity occurs at an angle of 90 degrees above nadir, or greater. Additionally, no more than 10% candela intensity occurs at an angle greater than 80 degrees above nadir.

Cutoff: No more than 2.5% candela intensity occurs at an angle greater than 90 degrees above nadir, and 10% at an angle greater than 80 degrees above nadir.

Semi-Cutoff: No more than 5% candela intensity occurs at an angle greater than 90 degrees above nadir, and 20% at an angle greater than 80 degrees above nadir.

Non-Cutoff: No candela limitation.

Lighting Power Allowance (LPA) shall comply with the current Title 24 or ASHRAE 90.1 standard, whichever is more stringent.

GUIDELINES

7.3.3 Well-Lit Entries

Doorways and addresses of buildings should be well-lit and visible.

7.3.4 Minimizing Light Trespass

Lighting of walls, soffits and other surfaces should be applied strategically. It is also encouraged that all such surfaces that are visible to the exterior be studied for luminance ratios and glare, since illuminated surfaces rather than the light source itself can often be the major source of glare from a building.

All lighting adjacent to the Bay should be designed and oriented so that lighting projects away from the shoreline, thus minimizing light trespass into adjacent waters.

7.3.5 Luminaire Ratings and Efficiency

Luminaires should be selected with rating considerations as determining factors and should demonstrate at least 60-80 lumens per watt source efficacy.

The following codes should apply to lighting installations:

- ASHRAE 90.1
- California Title 24
- IESNA Recommended light levels

If alternate or equal fixtures are suggested during the submittal process, they should have efficiency equal to or greater than the originally specified products.



Light projected onto surfaces reduces light pollution.



A well-lit entry that also reduces light pollution

7.4 General Signage

Signage helps to highlight the identity of businesses while enhancing the appearance of the streetscape. Signage should be of a creative and engaging.

The standards and guidelines below pertain to general signage, as well as wayfinding and interpretive elements.



Signage is an opportunity to convey a unique identity.

STANDARDS

7.4.1 Signage within the Power Station SUD

Generally, all signs shall be defined as described by Article 6 of the San Francisco Planning Code. Except as modified below, the provisions of Section 607.2 ("Mixed-Use Districts") of the San Francisco Planning Code applicable to UMU (Urban Mixed Use) Districts shall apply such that a sign that is permitted or prohibited in a UMU District shall likewise be permitted or prohibited at the Power Station.

7.4.2 Wall Signs

The Area of all Wall Signs shall not exceed three square feet per foot of street frontage occupied by the use measured along the wall to which the Signs are attached for up to 50 feet of street frontage, and an additional one square foot per foot of street frontage thereafter; provided, however, that in no case shall the Wall Sign or combination of Wall Signs cover more than 75% of the surface of any wall, excluding openings. The Height of any Wall Sign shall not exceed 60 feet, or the height of the wall to which it is attached, or the height of the lowest of any residential windowsill on the wall to which the Sign is attached, whichever is lower. Such Signs may be Nonilluminated, Indirectly Illuminated, or Directly Illuminated.

7.4.3 Concealed Electrical Signage Elements

All electrical signage elements such as wires, exposed conduits, junction boxes, transformers, ballasts, switches, and panel boxes shall be concealed from view.

7.4.4 Portable Signage

Portable signs, such as sandwich boards and valet parking signs, are permitted and limited to one per business. All portable signage shall be located within

frontage or furnishing zones on sidewalks, or within open spaces fronting the businesses.

7.4.5 Temporary Sale or Lease Signs

No permit shall be required for temporary Sale or Lease Signs. Such signs are permitted only when all of the following criteria are met:

- No more than two such signs are permitted at any one time on any building; and
- The area of each sign is no larger than 4 square feet; and
- The height of each sign is no higher than 10 feet; and
- The sign is a wall sign or a window sign; and
- The sign is not directly illuminated: and
- The sign indicates the availability of a particular space within the building on or in which the sign is placed;
 and
- The sign directs attention to a space which is available for immediate sale or lease.

GUIDELINES

7.4.6 Signage Design (

The design of building signage should be of a creative nature that conveys a unique identity. Collaboration with local artisans is strongly encouraged. Signage should be designed to relate to both the Power Station and the Dogpatch neighborhood. High quality materials and detailing are encouraged in building signs.

Tenant signage facing contributing buildings to the Third Street Industrial District should be utilitarian in design and materiality to reflect the adjacent historic resources and strengthen the 23rd Street Streetscape. Backlit signage should be avoided.

7.4.7 Signage Orientation

Signage should be primarily oriented toward the pedestrian realm.

7.4.8 Preferred Signage Types

To encourage variety, preferred sign types include small blade designs, chalkboards, split-flap displays, window signs, projections, wall murals, and wall signs.

7.4.9 Projecting Signage

Projecting and three-dimensional signs are encouraged to relate to pedestrian scale and enrich the public realm.

7.5 Wayfinding and Interpretive Signage

Thoughtfully located and intentionally designed wayfinding signage creates a legible and visually interesting neighborhood to guide people along the shortest routes to the appropriate transit options and neighborhood destinations. Visitors can also learn about the Power Station's history and cultural significance from well-placed educational signage.



Wayfinding signage helps promote the use of services and amenities.

STANDARDS

7.4.10 Wayfinding Signage

Clear wayfinding signage shall be provided to guide visitors and residents along the shortest walking route to transit stops, bike share stations, bicycle parking, car share pods, and major destinations on and off the project site. Highly visible information and signage about transportation services and amenities will encourage the use and enjoyment of these resources.

7.4.11 Public Facilities and Open Space Signage

Wayfinding signage shall be installed for interior public facilities, rooftop open spaces and facilities, ADA access routes, alternative access routes, bicycle facilities, the waterfront and waterfront access, and the Blue Greenway. Blue Greenway signage shall be consistent with the San Francisco Bay Trail Design Guidelines and Toolkit (2016).

7.4.12 Rooftop Public Open Space Signage

Access to elevated public open spaces shall have two locations of signage, one of which shall be within five feet of the building entrance, clearly visible from the street or adjoining public space. Signage to Publicly Accessible Privately Owned (POPOS) open spaces shall comply with signage requirements pursuant to Planning Code Section 138.

7.4.13 BCDC Considerations

Signage within 100 feet of Mean High Water shall be consistent with BCDC approved signage graphics. See *BCDC Shoreline Signs: Public Access Signage Guidelines* (2005) for guidance on the design and installation of signs used at public access areas that are part of development projects along the San Francisco Bay shoreline.

GUIDELINES

7.4.14 Parking Wayfinding

Wayfinding signage for vehicular and bicycle parking access should be visible from a public street.

7.4.15 Interpretive Signage Icon

Interpretive signage for site education and interpretation should be visible to pedestrians from a public street and located at key points of interest, such as the Stack, Unit 3, and the waterfront. Figure 2.3.1 shows a conceptual Interpretive Location Plan Diagram Interpretive signage should be consistent and compatible in design and content with the larger interpretive program.

Section 8 APPENDICES

A.	Block Plan Guide	319	B.	Transportation Demand Management	355
A.1	Block 1 Controls (Mid-rise Tower)	320	B.1	Introduction	355
A.2	Block 2 Controls (Mid-rise Building)	322	B.2	Planned TDM Measures and	
A.3	Block 3 Controls (Mid-rise Building)	324		Transportation Strategies	357
A.4	Block 4 Controls (Low-rise Building)	326	B.3	Additional TDM and Transportation Strategies	364
A.5	Block 5 Controls (Mid-rise Tower)	328	B.4	TDM Assumptions	366
A.6	Block 6 Controls (High-rise Tower)	330	C.		371
A.7	Block 7 Controls (Mid-rise Tower)	332		Sustainable Neighborhood Framework	
A.8	Block 8 Controls	334	D.	Power Station Definitions	379
A.9	Block 9 Options	336	E.	Applicable Planning Code Sections	387
A.10	Block 10 Controls (Mid-rise Building)	344			
A.11	Block 11 Controls (Mid-rise Building)	346			
A.12	Block 12 Controls (Low-rise Building)	348			
A.13	Block 13 Controls (Low-rise Building)	350			
A.14	Block 14 Controls (Low-rise Building)	352			

[This page intentionally left blank.]


A. Block Plan Guide

The following guide illustrates how the standards and guidelines contained within this D4D apply to buildings within each block.

These following diagrams depict the parcel boundaries and maximum three-dimensional massing envelope allowed for each block within which architecture can be imagined. The ground-floor controls for each location, and minimum depths of each type of use, are included, as well as constraints for loading and parking entries. Extents of underground parking are defined here as well.

In addition to the plan and axon drawings, the building standards and guidelines that apply specifically to each block are listed here, as an easy checklist reference for designers and regulating agencies alike. In some cases, additional standards and guidelines are included to clarify specific requirements or allowances for individual buildings. In no instance shall this guide conflict with standards and guidelines stated in the main body of this Design for Development document. Where conflicts occur, the Standards and Guidelines contained in the main body shall apply.

A.1 Block 1 Controls (Mid-rise Tower)

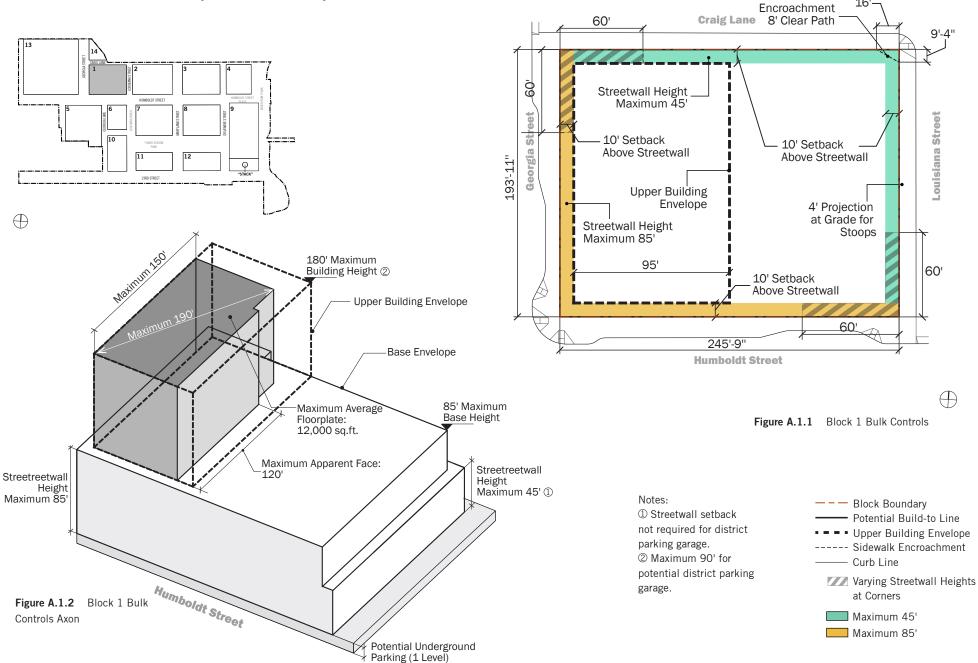

Sidewalk


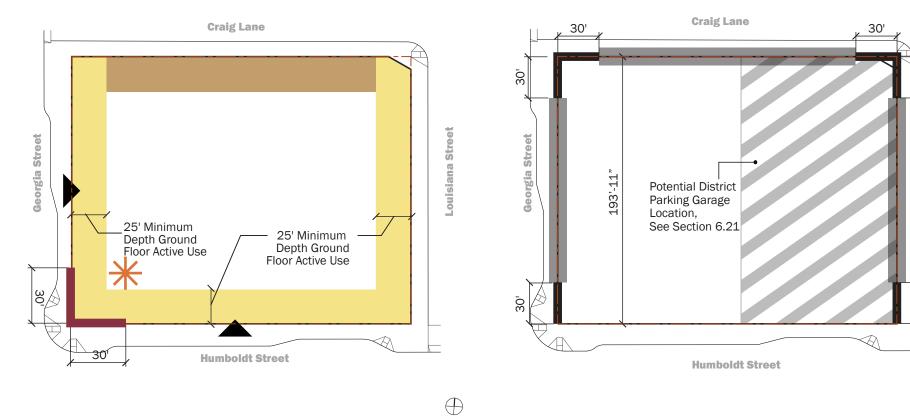


Figure A.1.3 Block 1 Ground Floor Uses


Figure A.1.4 Block 1 Parking And Loading





^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

Louisiana Street

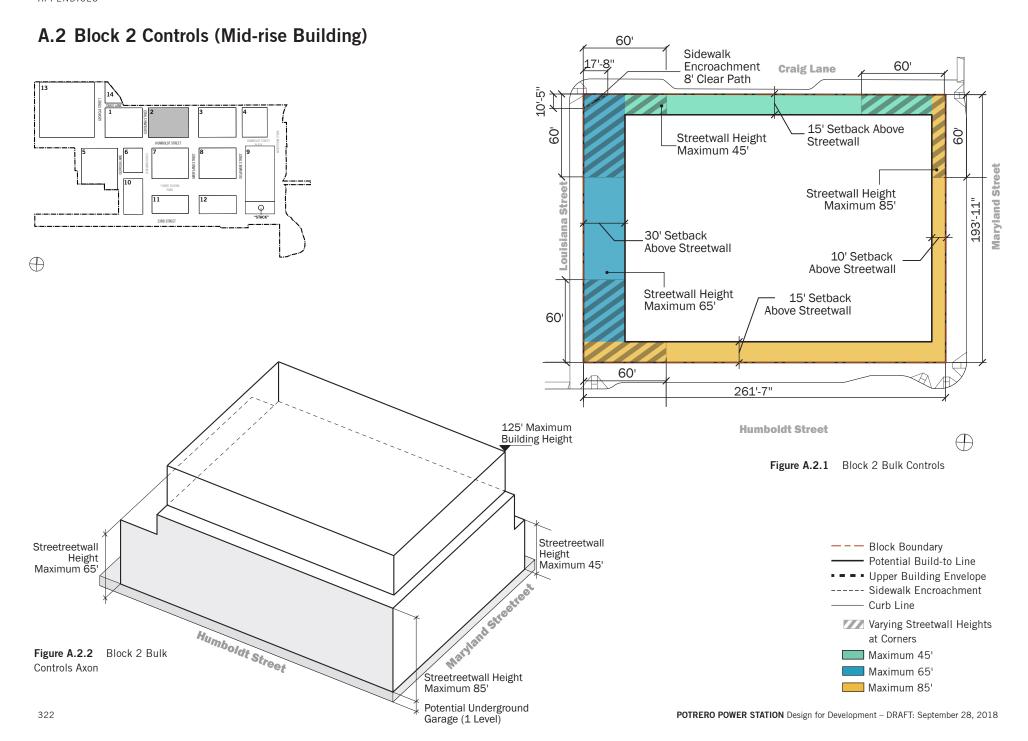


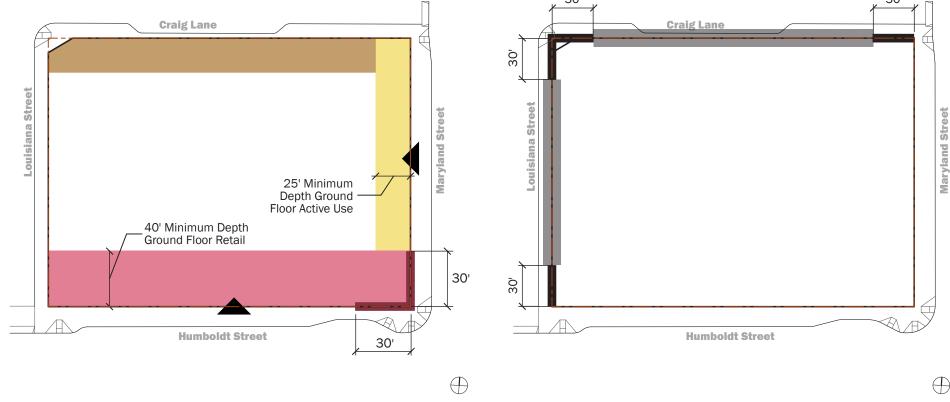



Figure A.2.3 Block 2 Ground Floor Uses


Figure A.2.4 Block 2 Parking And Loading



<sup>Block Boundary
Potential Build-to Line
Curb Line
Potential Parking and Loading Entry Frontage*
30' Loading Prohibited Zone</sup>

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

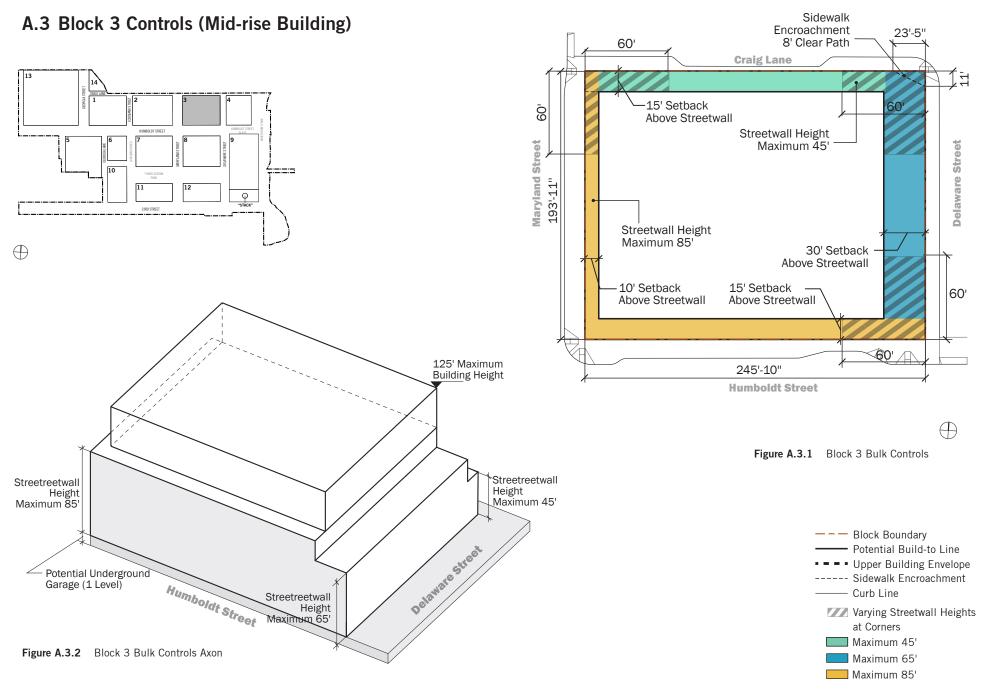

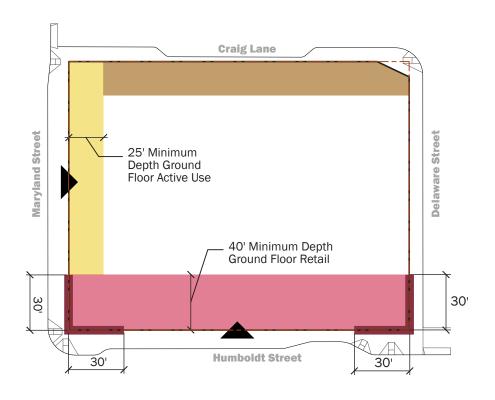

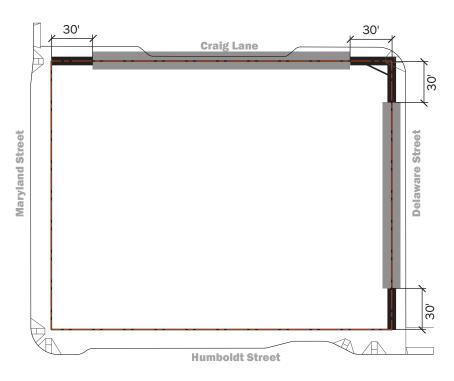



Figure A.3.3 Block 3 Ground Floor Uses




Figure A.3.4 Block 3 Parking And Loading



^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.4 Block 4 Controls (Low-rise Building)



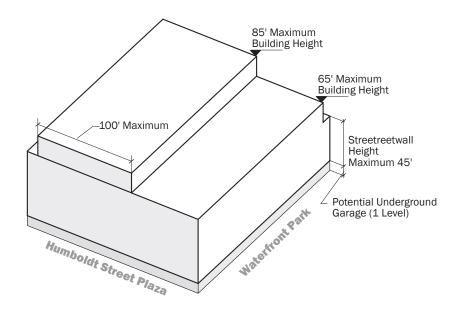


Figure A.4.2 Block 4 Bulk Controls Axon

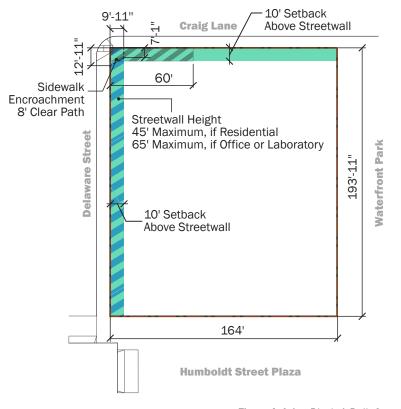


Figure A.4.1 Block 4 Bulk Controls



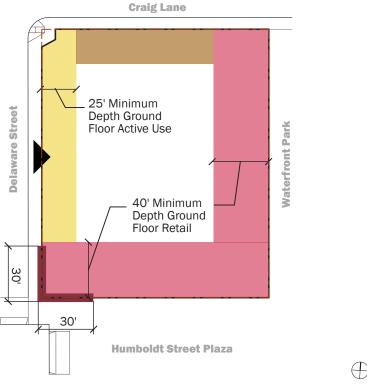


Figure A.4.3 Block 4 Ground Floor Uses






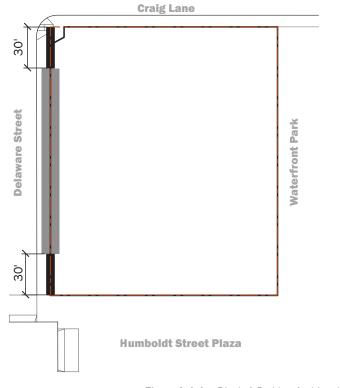


Figure A.4.4 Block 4 Parking And Loading



^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

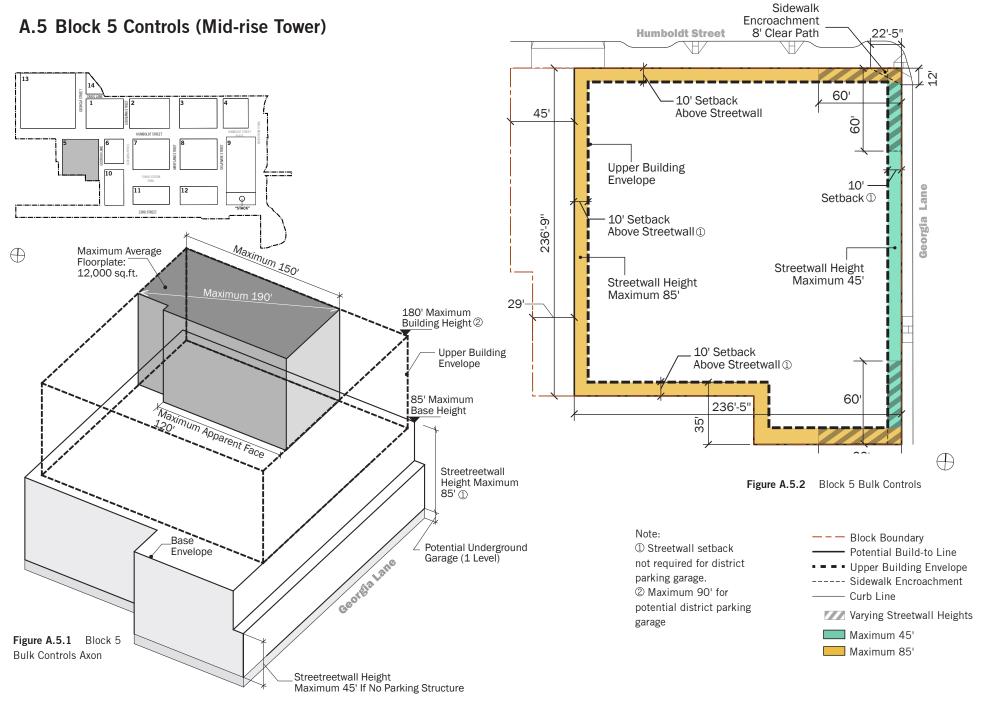

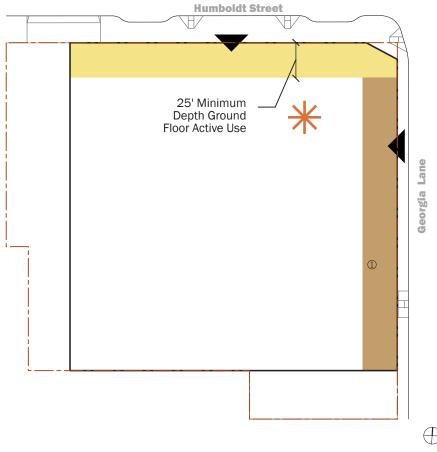

30-1 Potential District Parking Garage Location, Georgia Lane See Section 6.21 236'-5 Figure A.5.4 Block 5 Parking And Loading


Humboldt Street

Figure A.5.3 Block 5 Ground Floor Uses




Note:

① Active use not required for parking garage frontage if located at Block 5.

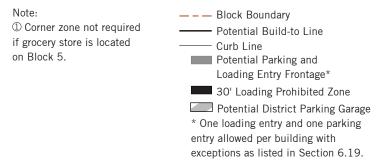

A.6 Block 6 Controls (High-rise Tower)

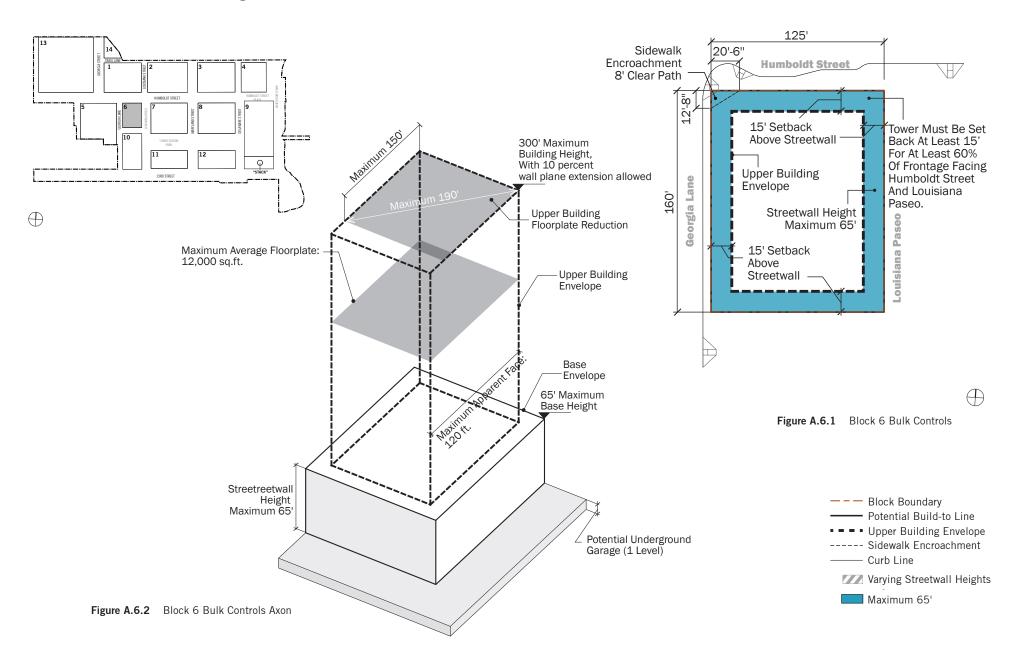

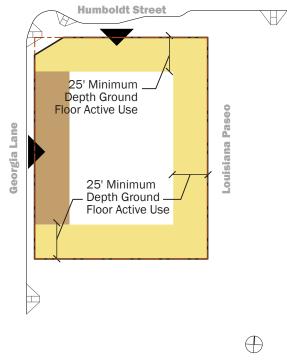


Figure A.6.3 Block 6 Ground Floor Uses





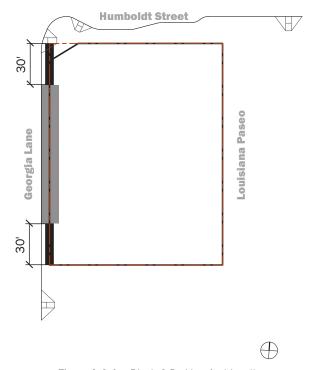


Figure A.6.4 Block 6 Parking And Loading

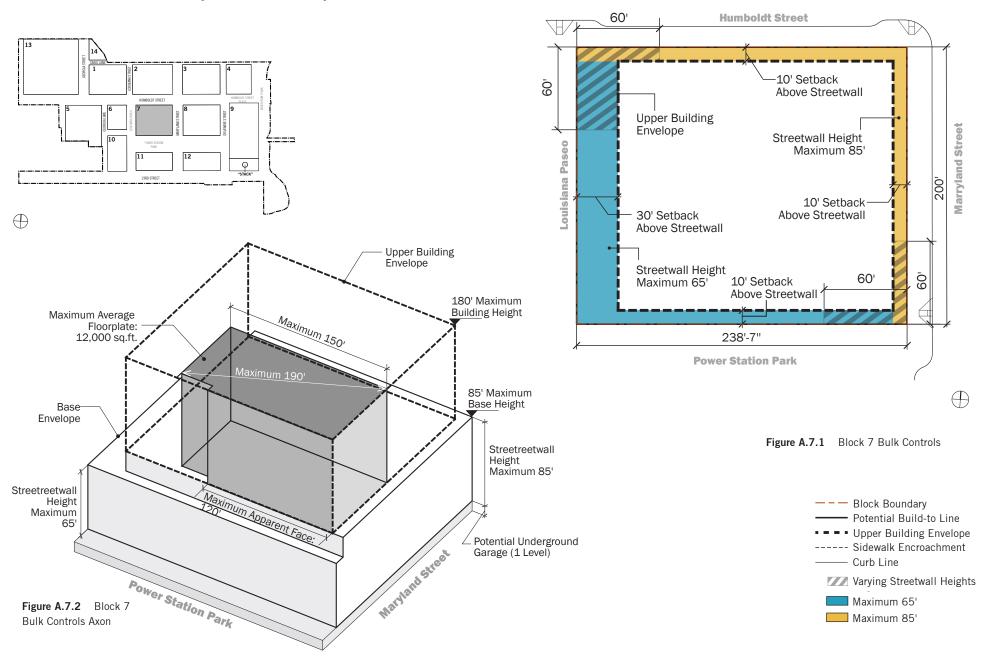

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.7 Block 7 Controls (Mid-rise Tower)



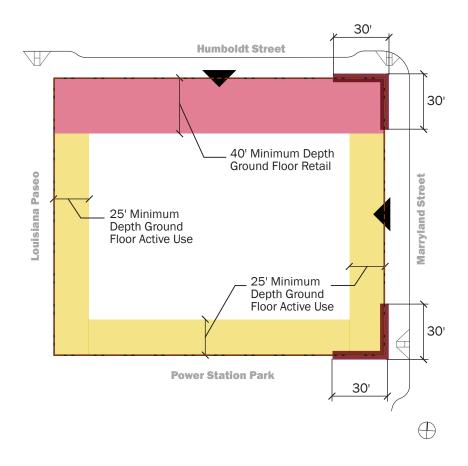



Figure A.7.3 Block 7 Ground Floor Uses





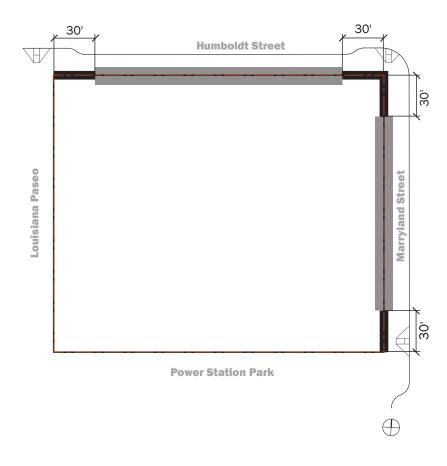


Figure A.7.4 Block 7 Parking And Loading

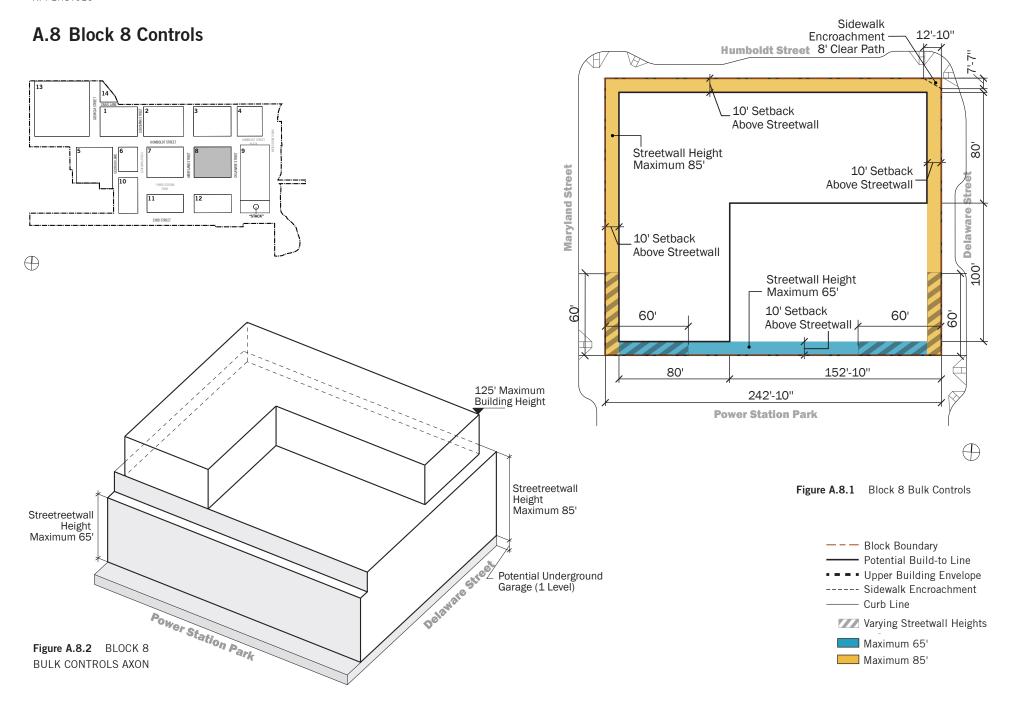

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.



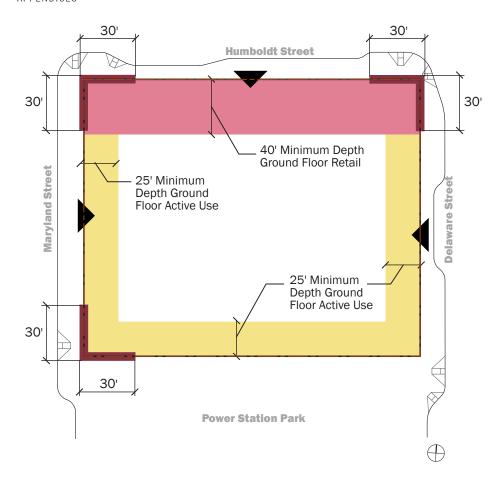


Figure A.8.3 Block 8 Ground Floor Uses




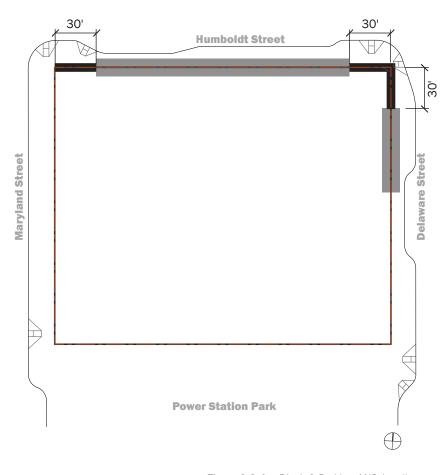


Figure A.8.4 Block 8 Parking AND Loading



^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.9 Block 9 Options

Block 9 currently contains the Unit 3 power block structure. Two options for the Block have been envisioned - one where Unit 3 remains and is repurposed with a hotel and another option where the structure is demolished and replaced with open space and a building with either hotel or residential uses.

Option 1: With Unit 3

In Option 1, the Unit 3 power block would remain and become repurposed as a hotel. This option would require the removal of obsolete mechanical equipment within Unit 3, such as the boiler. In some areas, subject to the standards discussed below, the building envelope could increase to create a floorplate more suitable for a hotel. The standards and guidelines given in Section A.9A will direct development on this block under Option 1.

Option 2: Without Unit 3

In Option 2, the Unit 3 power block is demolished and a new building will be constructed pursuant to the controls contained in this D4D. This is also described in Section A.9B Block 9 Controls: Without Unit 3.

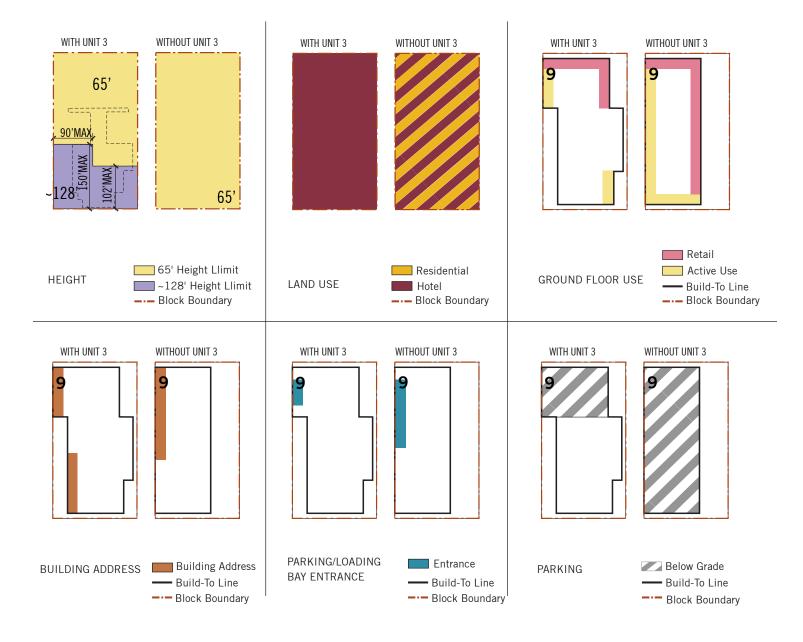



Figure A.9.1 Block 9 Development Scenarios

A.9A Block 9 Controls: With Unit 3



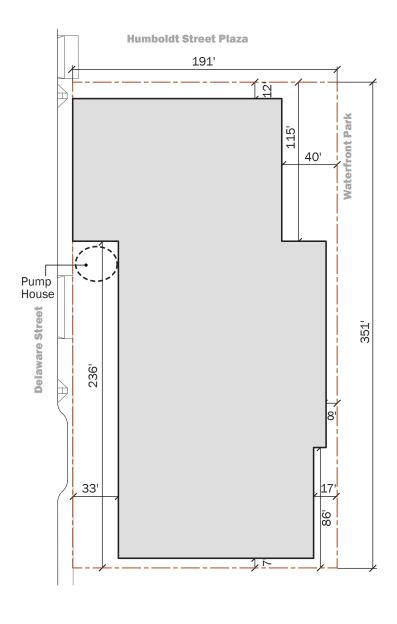


Figure A.9.2 Block 9A Setbacks

--- Block Boundary

Potential Build-to Line


Upper Building Envelope


Sidewalk Engreeshment

----- Sidewalk Encroachment
----- Curb Line


Varying Streetwall Heights

Existing Structure

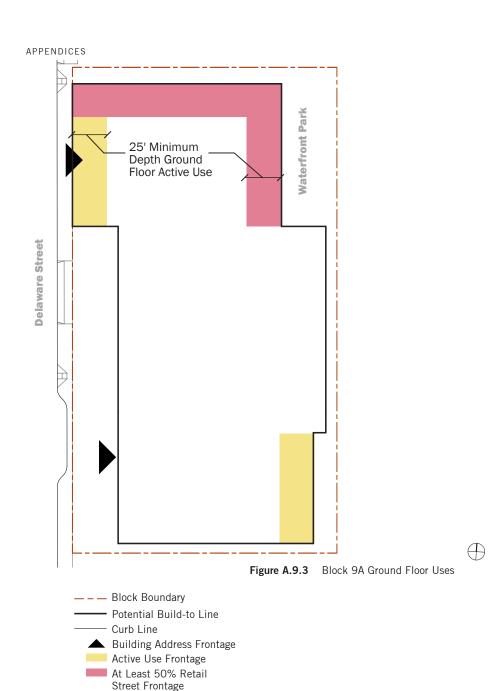

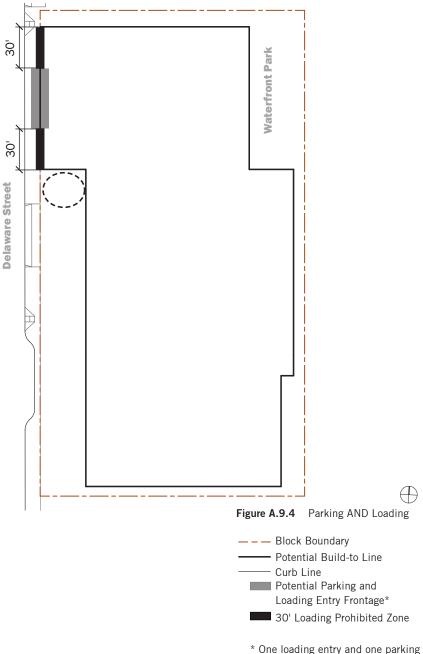

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.




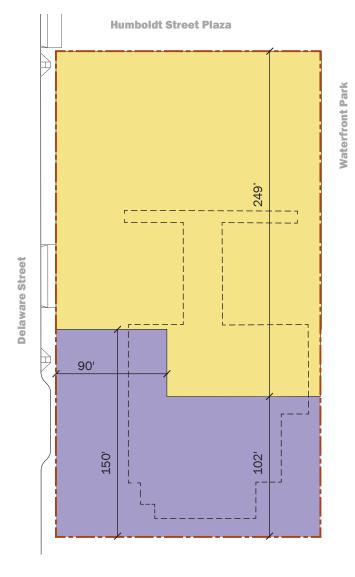


Figure A.9.5 Block 9A Height Controls



 \bigoplus





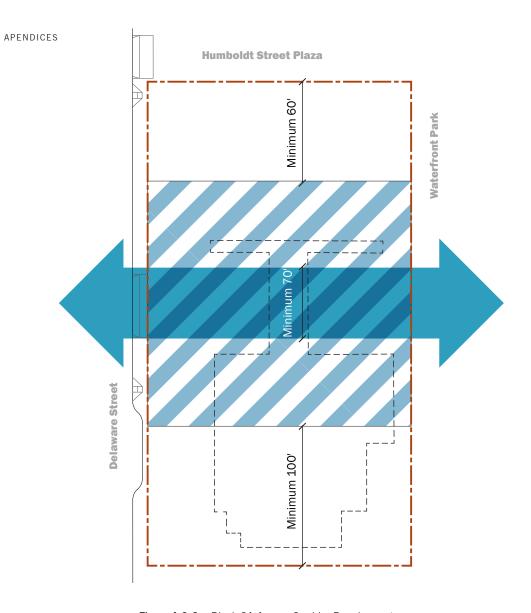


Figure A.9.6 Block 9A Access Corridor Requirement



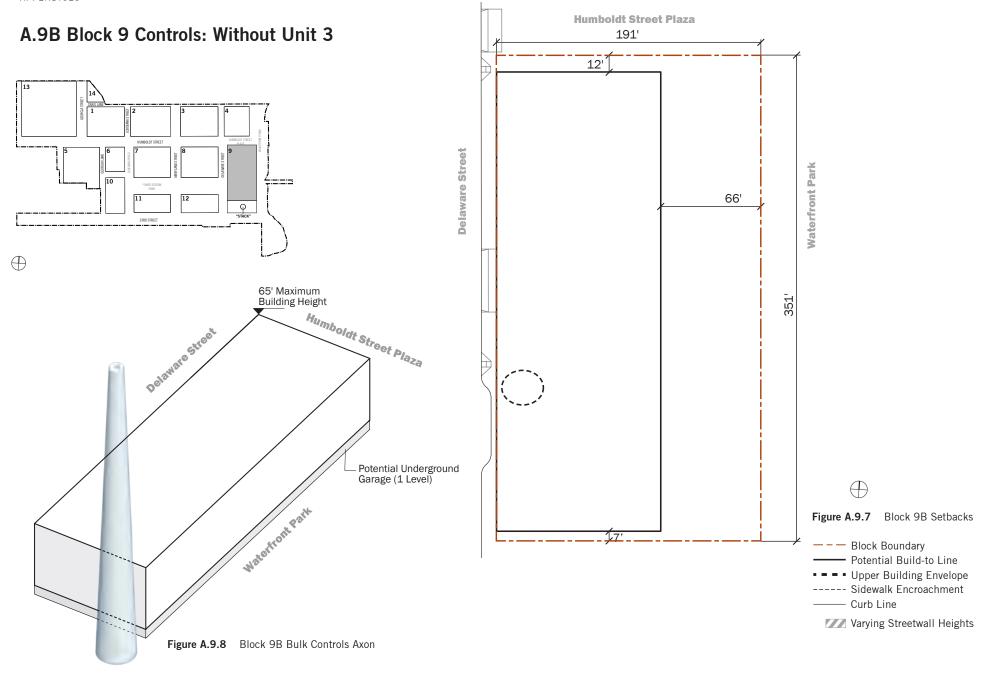


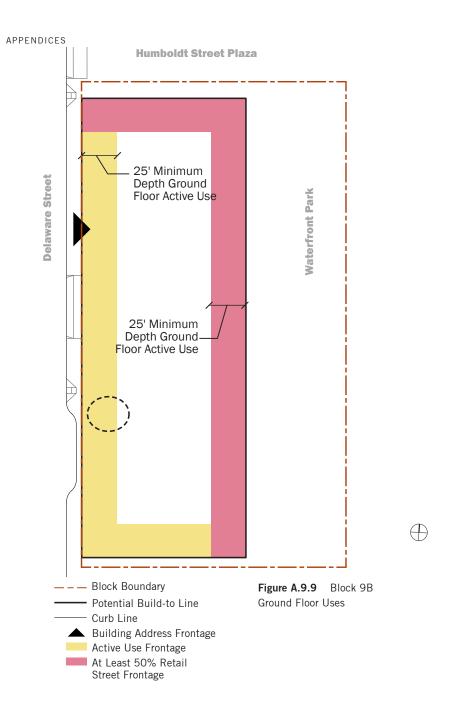


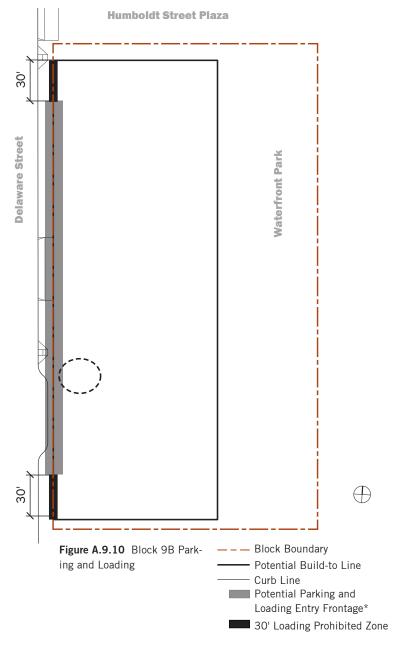

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.10 Block 10 Controls (Mid-rise Building)



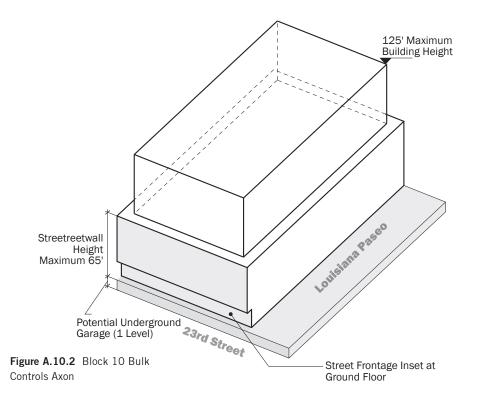

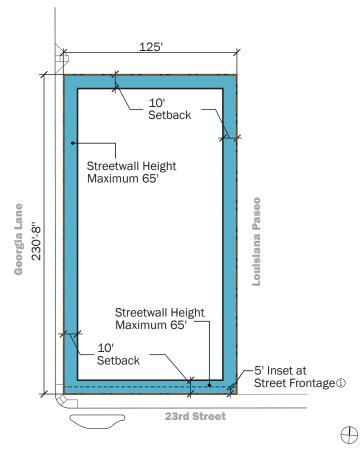



Figure A.10.1 Block 10 Bulk Controls



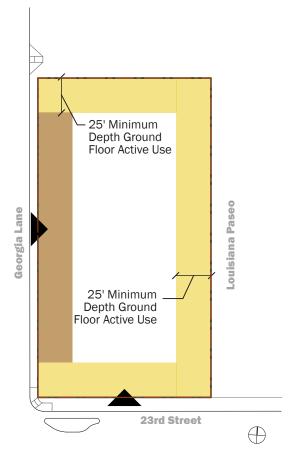


Figure A.10.3 Block 10 Ground Floor Uses





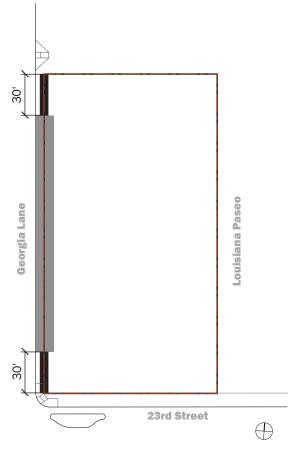


Figure A.10.4 Block 10 Parking and Loading

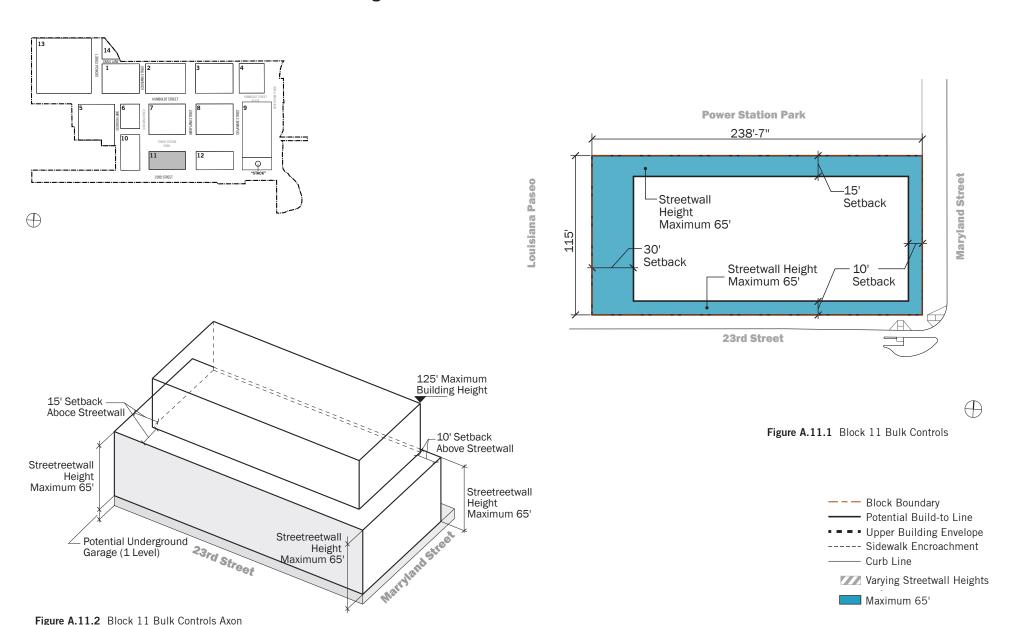

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.11 Block 11 Controls (Mid-rise Building)



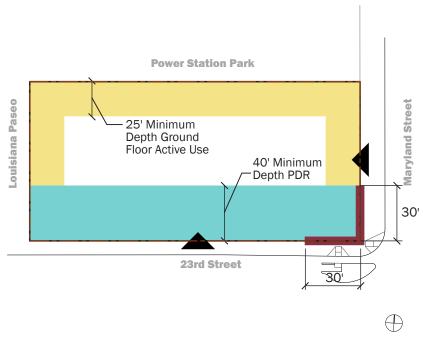



Figure A.11.3 Block 11 Ground Floor Uses





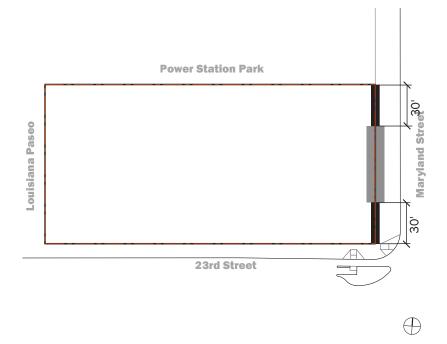



Figure A.11.4 Block 11 Parking and Loading




^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.12 Block 12 Controls (Low-rise Building)

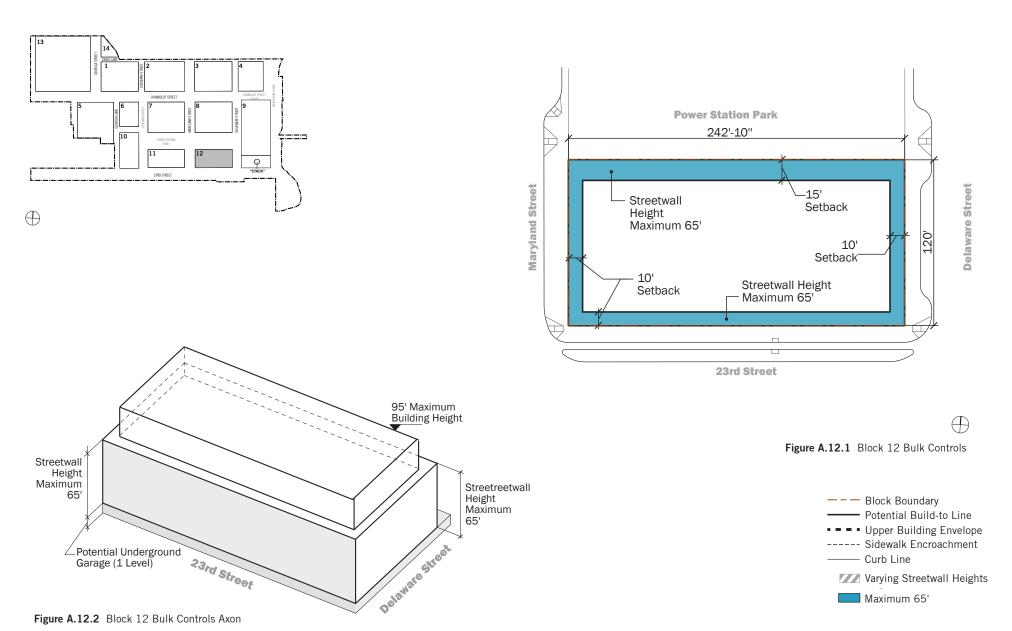

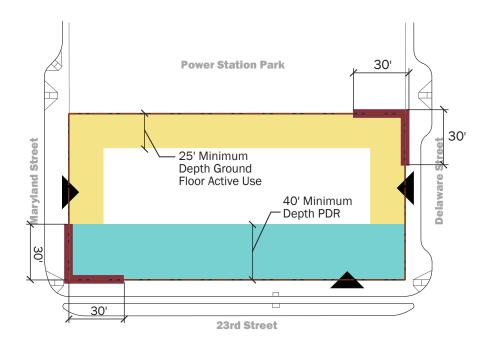

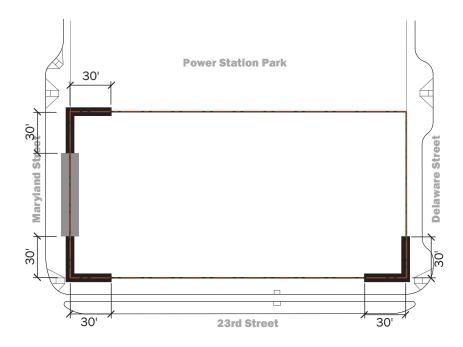

. _. . . .

Figure A.12.3 Block 12 Ground Floor Uses







Figure A.12.4 Block 12 Parking and Loading

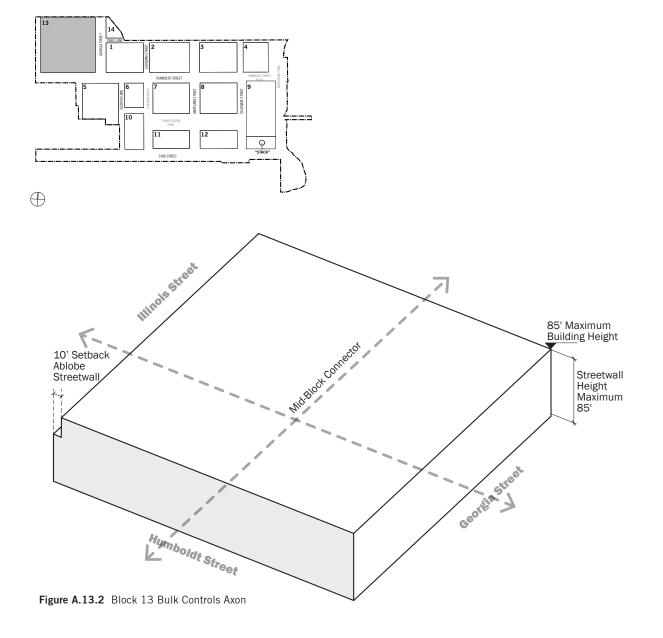

^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

A.13 Block 13 Controls (Low-rise Building)



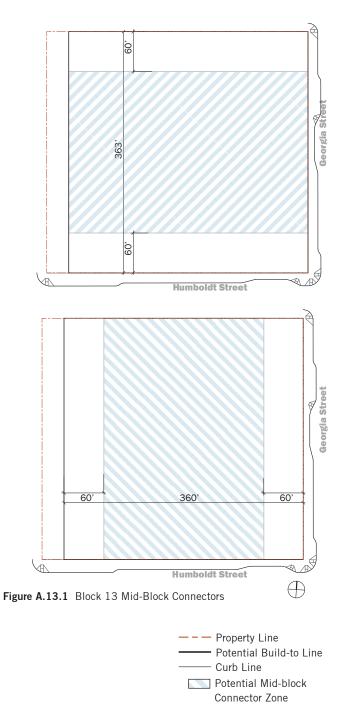

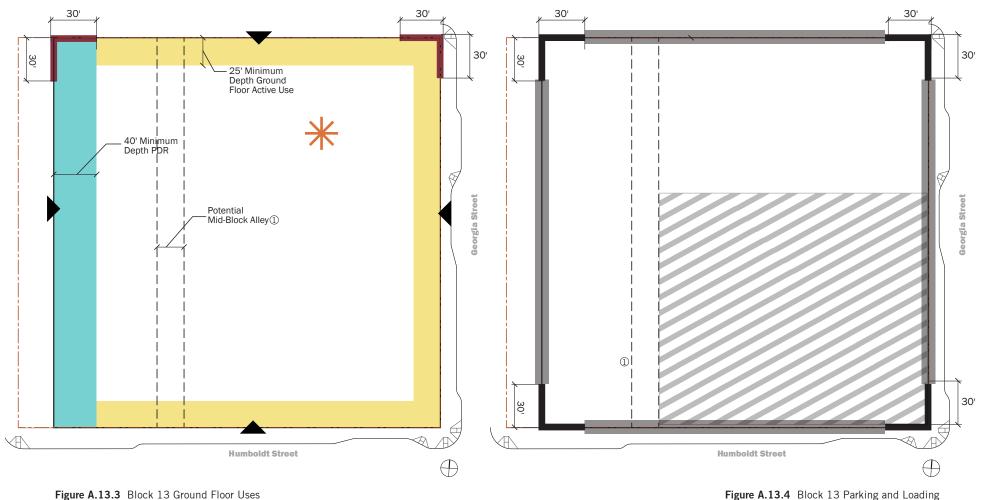


Figure A.13.3 Block 13 Ground Floor Uses




Note:


① Active Lane Frontage is required on both sides of mid-block alley. Exact location of mid-block alley is to be determined during design of Block 13.

Note:

① Potential Parking and Loading Entry Frontage is allowed on both sides of mid-block alley. Exact location of mid-block alley is to be determined during design of Block 13.



A.14 Block 14 Controls (Low-rise Building)






Figure A.14.2 Block 14 Bulk Controls Axon


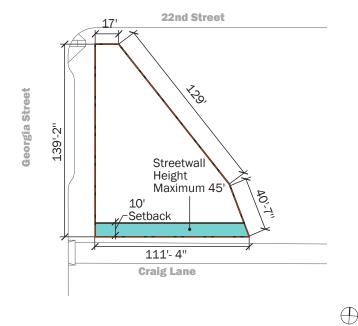


Figure A.14.1 Block 14 Bulk Controls



352





Figure A.14.3 Block 14 Ground Floor Uses







Figure A.14.4 Block 14 Parking and Loading



^{*} One loading entry and one parking entry allowed per building with exceptions as listed in Section 6.19.

APPENDICES

[This page intentionally left blank.]

B. Transportation Demand Management

B.1 INTRODUCTION

The Potrero Power Station ("PPS") development is located on a 29-acre site in San Francisco's Central Waterfront area. PPS will include a mix of uses including residential, commercial, laboratory, retail, hotel, and open space. The site benefits from proximity to the waterfront and the Dogpatch neighborhood's retail and transportation options found on Third Street, as well as a relatively flat topography and close access to downtown San Francisco.

WHY TRANSPORTATION DEMAND MANAGEMENT

TDM measures in general, and those described further in this plan specifically, work together to reduce single-occupancy vehicle (SOV) trips by expanding mobility options and incentivizing the use of spatially and environmentally efficient modes. Targeted programs strengthen the benefits of investments in bicycle and pedestrian infrastructure and the site's proximity to major transit nodes by reinforcing awareness of these options, breaking down barriers to incorporating them in travel routines, and incentivizing habitual use.

This TDM Plan reaffirms PPS's commitment to sustainability and to minimizing the project's impact on traffic congestion. It encourages the site's residents, employees, and visitors to use the most environmentally friendly and spatially efficient mode possible for each trip, with an emphasis on cycling, walking, and higher capacity modes.

The urban form planned at PPS and this draft TDM Plan are consistent with City of San Francisco policies that aim to encourage the use of transit and other non-auto modes of transportation, as well as the City's efforts to manage the transportation impacts of new development. The Plan was developed using San Francisco's new TDM Ordinance

as a guide, and the PPS team used the Ordinance's framework to scale the site's programs appropriately.

Many campuses have implemented TDM programs to reduce SOV travel and find the optimal balance of transportation modes to accommodate growth. Genentech implemented an aggressive TDM strategy in 2006 that included programs such as shuttle service and parking cash-out accompanied by comprehensive marketing and communications through an online employee portal. Since implementation, Genentech's drive-alone mode share has decreased by almost 30%, decreasing carbon emissions from 4.5 tons per employee to 1.9. Similarly. Stanford University's extensive TDM program, which has for years included meaningfully priced parking, transit subsidies. and incentive programs, has effected a substantial decrease in SOV commuting, from 72% in 2002 to 46% in 2011. Moreover, these programs serve campuses that grew rapidly during the periods noted, but this growth was not accompanied by substantial increases in parking. These two examples, along with many others from developments and employers across the country, attest to the power of thoughtfully crafted TDM programs.

Given these successes, robust TDM programs are becoming expected aspects of new developments in San Francisco and beyond. In early 2017, the City enacted a TDM Ordinance that requires developers to establish TDM programs scaled to the amount of parking they plan to build on-site. This ordinance reinforced existing policies that aimed to encourage the use of non-auto modes, such as the city's Transit First Policy, which was established in 1973 and amended to include pedestrians and bicyclists in 1999. New residents and office tenants also increasingly demand convenient access to quality

multimodal infrastructure, and in urban areas like San Francisco, they assume that parking will be treated as a limited commodity that will be priced based on occupancy levels and market rates.

TDM AT POTRERO POWER STATION

The TDM Plan was guided by the TDM Ordinance and reflects the values outlined in City policies by striving to maximize the use of travel options that are sustainable in all senses of the word.

This document includes a discussion of TDM measures and transportation investments aligned with the categories and measures included in the TDM Ordinance menu of measures, as well other transportation investments PPS is considering that fall outside the TDM Ordinance. The latter measures are aligned with the spirit of the TDM Ordinance and support and leverage the effects of TDM at the site and around the City.

A GUIDE TO THIS DOCUMENT

Chapter 2 includes a discussion of point-generating TDM measures, as well as additional supportive strategies that do not generate points through the TDM Ordinance but are important in complementing and tying together a full set of measures.

This TDM plan is Appendix B of the Potrero Power Station Design for Development document, which is referred to herein.

The Potrero Power Station Mixed-Use Development project would rezone and establish development controls for a multi-phased, mixed-use development at the project site. The project would include amendments to the General Plan, potentially including the Central

Waterfront area plan, and Planning Code and create a new Potrero Power Station SUD. The SUD would establish land use controls for the project site and incorporate design standards and guidelines in a new PPS Design for Development document. References to the Planning Code ("Code") within this TDM Plan, and in the PPS Design for Development document, are references to the City of San Francisco Planning Code as it exists as of the date of this document.

B.2 Planned TDM Measures and Transportation Strategies

This initial TDM Plan consists of a package of measures that will work together to effect behavioral change in a way that is both cost effective and highly marketable. These measures include infrastructure improvements, incentives, and ongoing programs, many of which have been successfully implemented in other urban, mixed-use environments.

TDM ORDINANCE MEASURES

The TDM measures recognized by the City through the TDM Ordinance guidance materials are organized according to the categories set forth in the guidance materials. These categories include:

- INFO Information Services
- ACTIVE Active Transportation
- PKG Parking Management and Policies
- HOV High Occupancy Vehicle Measures
- CSHARE Car Share and Scooter Share
- FAMILY Family-Supportive Measures
- DELIVERY Delivery-Supportive Measures
- LU Land Use

TDM Ordinance Category: INFO

INFO-1: Multimodal Wayfinding Signage

• Applies to: Residential, Office, Retail and Other (PDR)

Signage and wayfinding to indicate points of connection between different modes, as well as estimated travel times and directions by mode, can help increase people's understanding of their non-auto travel options (see Figure B.2.1). Clear signage is also important for ensuring safety for all types of users and differentiating spaces for different users within shared rights of way. Signage can also indicate the nature and location of nearby bicycle routes and the location of bicycle parking.

Potrero Power Station will design and install signage and wayfinding at key points throughout the development, including signage for safety along shared streets. Potrero Power Station will coordinate with appropriate City agencies on the project's overall signage and wayfinding program to ensure the project conforms to City standards.





Figure B.2.1 Multi-Modal Wayfinding Examples

INFO-2: Real-Time Transportation Information Displays

• Applies to: Office and Retail

Making such information readily available can increase residents' awareness of local transit options and can facilitate efficient trip planning and the use of non-auto modes. This measure consists of providing real-time transportation information to Potrero Power Station residents, employees, and visitors. Depending on the technologies available by the time the first phase of the project is built, information could be displayed on screens in lobbies (see Figure B.2.2) and other high traffic areas, as well as on a potential project website and other communications channels.

Potrero Power Station will display dynamic transit information and transportation marketing in building lobbies or use a similar approach based on state-Of-the-practice technology at the time of building design.

INFO-3: Tailored Transportation Marketing Services

• Applies to: Residential, Office and Retail

A strong communication and marketing campaign is critical to the success of any TDM program, ensuring that residents, employees, and visitors receive information about relevant resources and incentives at appropriate times and through channels that are easily accessible. Incorporating consistent branding into all communications can help create a sense of place and establish a cohesive identity for the transportation program. Branding can be used to emphasize that resident, employees, and visitors can travel seamlessly through the area.

The Potrero Power Station will develop a cohesive marketing effort to promote all transportation options at the site, including biking, walking, public transit, and driving/parking. As part of a site-wide marketing campaign, Potrero Power Station will develop transportation welcome packets to inform new residents and employees of the range of transportation options available to them. These packets will likely include upto-date information on local and regional transit services (including maps, schedules and fares) and where transit passes can be purchased, bicycle way maps, and nearby car share locations, in addition to other relevant travel information. They could also include sources for additional web-based transportation materials (e.g., 511.org, NextBus, and the San Francisco Municipal Transportation Agency website). Finally, the packets could include up-todate information on the range of transportation benefits available, including any relevant details on how to take advantage of these benefits. This strategy will ensure that a lack of knowledge is not a barrier to choosing nondriving modes. For Office and Retail land use categories, representing the bulk of employees on site, personal consultation for each new employee will be provided accompanied by a request for a commitment to try new transportation options. A commitment could include a pledge, for example, to try transit, carpooling, bicycling, or walking within the first month of beginning employment at the project site.

As part of a broader transportation marketing campaign, Potrero Power Station will provide new residents and employees with a transportation welcome packet upon move-in or upon starting work at the site. These informational packets will be continuously updated as local transportation options change. The site's transportation staff will also engage in ongoing efforts to provide information on and market the use of non-auto modes.





Figure B.2.2 Transit Information Screen Displays

TDM Ordinance Category: ACTIVE

ACTIVE-1: Improved Walking Connections
• Applies to: Residential, Office and Retail

High quality street design can greatly improve overall walking conditions, enhance access to transit, and

facilitate safer and more convenient pedestrian and bicycle connections. A pedestrian-oriented urban design is essential for residents, employees, and visitors to fully take advantage of all available transportation options and

programs throughout a site and nearby.

Potrero Power Station's street cross sections are being developed with state-of-the-practice street design principles in mind. Streets within the development will be consistent with the Better Streets Plan as codified in Planning Code Section 138.1 and the design of complex rights of way like 23rd Street will be developed using state-of-the-practice urban street design guidelines from the National Association of City Transportation Officers (NACTO) (see an example of a street designed using NACTO guidelines in Figure B.2.3). The project is also committed to continuing the Blue Greenway pedestrian and bicycle trail through the site, along the Bayfront and 23rd Street. These improvements will help shape the overall neighborhood environment and enable other TDM measures to succeed.

Potrero Power Station will design streets to be safe and comfortable for non-motorized users with features including wide sidewalks, clear crossings, and high quality bicycle infrastructure. The design of streets will comply with the Better Streets Plan and will incorporate additional streetscape elements that contribute to VMT reduction.



Source: NY DOT

Figure B.2.3 Complete Streets Design Features

ACTIVE-2: Bicycle Parking in Compliance with Code Requirements

• Applies to: Residential, Office, Retail and Other (PDR)

Safe and convenient bicycle parking is a key ingredient for creating a bicycle friendly environment. PPS intends to provide bicycle parking space at the Code-required amount, consistent with PPS Design for Development. There are several methods of providing secure (Class I) bicycle parking spaces for residents and employees. Bicycle rooms or cages can be placed at convenient locations within buildings or in nearby public spaces, and bicycle owners who qualify can receive a key or access card to use the space (often the same card used to access an elevator or parking garage). Supportive amenities such as showers and lockers will also be provided for use by employees.

On-street Class II bicycle racks in highly visible locations will also be provided to facilitate short-term bicycle parking. Bicycle racks should be easy to use and located in the most visible and convenient parts of the building frontage (near entrances to establishments at PPS). Public bicycle parking is often considered secure when it is situated in well-lit, highly visible areas.

Bicycle parking facilities will also accommodate a limited number of non-standard types of bicycles including those with cargo and trailer attachments.

Potrero Power Station will include the Code-required Class I bicycle parking spaces and Class II bicycle parking spaces and will work with vertical developers to set aside necessary square footage for secure bicycle parking in convenient areas of each building.

ACTIVE-3: Showers and Lockers for Employees

• Applies to: Office, Retail and Other (PDR)

Showers and lockers located near bicycle rooms can allow those who have to bicycle longer distances to rinse off and change from clothing suitable for cycling to work attire, eliminating one potential barrier to cycling to work. As such, the development will provide showers and lockers for office, retail, and PDR employees in amounts required by the San Francisco Planning Code, consistent with PPS Design for Development.

Potrero Power Station will install showers and lockers in or near each bicycle room located in commercial buildings.

ACTIVE-5A: Bicycle Repair Stations

• Applies to: Residential, Office and Retail

Maintenance can be a key barrier to using a bicycle as a primary transportation mode. Fix-it stations can address this barrier by providing a workbench, fix-it pole (to allow bicycles to be hoisted off the ground for easier access), bicycle tools, and a vending machine for commonly needed bicycle parts (i.e. chains and bicycle lights). These fix-it stations can also be equipped with up-to-date bicycle maps, information on bicycle-related programming on-site or nearby, and other information for cyclists.

Potrero Power Station will install bicycle fix-it stations in each bicycle room throughout the site and equip stations with a workbench, fix-it pole, tools, and bicycle-related information.



Source: DERO

Figure B.2.4 DERO Bicycle Fix-it Station

TDM Ordinance category: PKG

PKG-1: Unbundle Parking

• Applies to: Residential, Office and Retail

"Unbundling" parking means that the cost of parking is separate from the cost of residential and commercial units. It is an increasingly common practice in urban areas, and the City of San Francisco requires residential developments to unbundle parking.

Unbundling parking costs changes parking from a required purchase to an optional amenity, so that households can choose how many spaces they wish to lease or purchase. This approach provides a cost savings to households who decide to dispense with one of their cars, and it can help attract households who wish to live in a transit-oriented neighborhood where it is possible to live well with only one car, or even no car, per household. Thirty percent of San Francisco households do not own a vehicle.

For this measure to work optimally for office users, the users of parking – not their building managers or employers – must be the ones who ultimately pay daily or monthly costs.

Potrero Power Station will unbundle parking costs from all leases and sales and ensure that the users of parking are the ones who ultimately pay for it.

PKG-2: Short-Term Daily Parking Provision

Applies to: Retail

Paying a lump sum for unlimited use of any service results in people using that service more, as there is no refund for less use. Parking demand works the same way: drivers paying a monthly fee to park are effectively paying a big fee for the first day of parking and then every day after parking is free, encouraging driving on days when other choices may have been a reasonable option. To shift the decision-making and reduce excess parking demand, parking will be managed at an hourly or daily rate only, without a long-term parking option for retail employees or visitors.

Potrero Power Station shall not include a parking rate or pass beyond one day for retail employees and visitors.

PKG-4: Minimize Parking Supply

Applies to: Residential

Building excessive parking leads to increased automobile use, contributing to more vehicle trips, increased traffic congestion, higher housing costs, and greater greenhouse gas emissions. Given the large number of households with no vehicle and the demand for housing in San Francisco, a limited supply of parking could be expected to attract a high proportion of residents without vehicles, which in turn should result in fewer vehicle trips from the development. The project site will be directly served by high-quality transit and is in a neighborhood that is already facing vehicular congestion, which further discourages driving and parking.

Potrero Power Station will establish maximum parking ratios that are lower than the neighborhood average for residential uses, and will monitor parking trends to inform how much parking is actually supplied.

Specifically, Associate Capital has committed to parking ratios consistent with the adjacent Pier 70 development, which are:

- Residential: 0.6 spaces per unit
- Office, Lab, and PDR: One space per 1,500 square feet of gross floor area (GFA)
- Grocery: Three spaces per 1,000 square feet of GFA
- Other Retail: Zero parking spaces

TDM Ordinance Category: HOV

HOV-2: Shuttle Bus Service

• Applies to: Residential, Office and Retail

Providing shuttle service to nearby regional transit hubs can reduce a barrier to commuting by transit. PPS plans to provide shuttle service to the 16th Street BART station and the 22nd Street Caltrain station. The proposed service would run every 15 minutes during weekday peak periods and would be open to the public and free to users.

PPS aims to provide shuttle connections to 16th Street BART and the 22nd Street Caltrain terminal.

SFMTA is planning new Muni service (temporarily called the "XX") that would parallel the east-west route, and the agency is planning significant service increases on the T-Third over the long term that would obviate the need for supplemental north-south service. The project team's intent at PPS may depend on the market penetration of car-share is to provide sufficient service to meet the needs of PPS residents, employees, and visitors, and to compliment Muni service once the XX is in place.

TDM Ordinance Category: CSHARE

CSHARE-1: On-Site Car Share Parking

• Applies to: Residential, Office, Retail and Other (PDR)

Allowing residents, workers, and visitors to rent cars onsite can make it easy for people who do not have a car (or who have a limited number of cars per household) to have access to a vehicle when needed (e.g. to run errands that require hauling heavier items). PPS will provide car-share spaces in convenient locations on-site. Spaces will be located in high-visibility parking spots within publiclyaccessible parking facilities, with clear exterior signage to increase visibility and emphasize the convenience of car share.

PPS will provide car-share parking spaces as required by Planning Code, consistent with PPS Design for Development. The number of car-share vehicles provided companies operating in the area.

Potrero Power Station will provide car-share parking spaces as required by Planning Code.



Source: Flickr, Marcin Wichary Figure B.2.5 Zipcar Car-Share

TDM Ordinance Category: FAMILY

FAMILY-2: On-Site Child Care

• Applies to: Residential, Office, and Retail

Providing child care services on-site can help minimize a key barrier for parents to taking non-auto modes to work. In doing s, it can reduce travel needs for both residents and employees by eliminating an extra round trip to a separate childcare destination. The site will work to identify an on-site child care provider and work with them to design a facility consistent with best practices.

The Potrero Power Station will work to ensure that a child care provider locates on-site in an area that is convenient to both residents and workers.

TDM Ordinance Category: DELIVERY

DELIVERY-1: Delivery Supportive Amenities

Applies to: Office and Residential

Providing storage space for perishable groceries can have a direct effect on reducing trips by encouraging and facilitating online ordering. Where this type of measure has been implemented without direct staff monitoring at all times, building residents typically access deliveries through a locker system with unique pick-up codes that include the locker number and access times for the delivery recipient. Regardless, providing some kind of secure place for delivery storage can allow residents and employees to confidently arrange for deliveries, even if they may not be able to pick items up or get them to their own refrigerator or pantry immediately.

Potrero Power Station will provide in-building lockers in each residential and office building that are refrigerated and/or allow for dry storage of sensitive or perishable deliveries. As online shopping continues to grow, technologies will likely evolve and the site will aim to implement a system that is consistent with general market preferences at the time of building design.

TDM Ordinance Category: LAND USE

LU-2: On-Site Affordable Housing

Residents living in affordable housing typically own fewer cars per household than residents of market-rate units. While the site is committed to including some affordable housing in the project, the exact amount and the incomelevel breakdowns are still being determined.

Potrero Power Station will provide for significant affordable housing on-site.

Transportation Demand Management Coordinator

An on-site TDM Coordinator is crucial to the successful implementation and oversight of the PPS TDM program. This person would manage the rollout of all programs, including managing vendors and engaging with new site residents and tenants to introduce them to the site's transportation offerings through welcome packets and other digital or online materials.

B.3 Additional TDM and Transportation Strategies

In addition to the TDM measures described in the last section, PPS plans to make further important investments in transportation infrastructure and programs in the spirit of encouraging the use of non-auto modes.

While not included in the City's TDM Ordinance menu of measures, the additional measures shown in Table B.3.1 will also facilitate successful implementation of the full transportation program, tying program areas together and ensuring critical pieces of infrastructure exist to support use of other on-site transportation programs. For example, provision of transit layover facilities is essential to maximizing the impact of a multimodal transit subsidy, much like high quality bicycle routes are key to encouraging enough site users to consider cycling a primary travel option and, in turn, make full use of on-site bicycle parking.

 Table B.3.1
 Additional Transportation Strategies

STRATEGY AREA	ADDITIONAL TRANSPORTATION STRATEGIES	RELATED TDM MEASURES	
Program Management and Implementation	Expanded role of TDM coordinator to include coordination with fresh food-related shops, vendors, and for events at the site	 Strategic Multimodal Signage/Wayfinding Real-time Travel Information Transportation Welcome Packets and Ongoing Transportation Marketing Campaign 	
Transit	Provision of layover space and operational needs for the Muni XX route on 23rd Street	Shuttle Bus Service Multimodal Transportation Subsidy	
	Required Transportation Sustainability Fee		
Bicycle	Investment in completing the Blue Greenway through the site	Bicycle Parking Bicycle Repair Station and Maintenance	
	Traffic-calmed interior roadways	Services	
	Space allocated for bike share docks	Showers and Lockers for EmployeesImproved Walking Conditions	
Loading	Ample curb frontage allocated to passenger and commercial loading	 Multimodal Transportation Subsidy Minimize Parking Supply Cold/Dry Storage for Grocery/Package Delivery 	



Figure B.3.2 Ford GoBike Dock

Bike Share Docks

PPS plans to make adequate space available for bike share at the site. Access to bike share will be provided in high-traffic areas near key buildings and site entrances, facilitating easy and convenient use of the bike share system. This will serve to further reinforce the site's multimodal brand.

B.4 TDM Assumptions

If you are not sure of the eventual size of the project, provide the maximum estimates.

Gross Floor Area and Occupied Floor Area are defined in Planning Code Section 102.

	Land Use Category A (Retail)
Gross Floor Area (GFA)	233,377
Occupied Floor Area (OFA)	233,377
Number of Accessory Parking Spaces	44
Target Points	25 (75% of 33)

	Land Use Category B (Office)	
Gross Floor Area (GFA)	1,485,035	
Occupied Floor Area (OFA)	1,485,035	
Number of Accessory Parking Spaces	843	
Target Points	24 (75% of 32)	

	Land Use Category C (Residential)	
Gross Floor Area (GFA)	2,682,427	
Occupied Floor Area (OFA)	2,682,427	
Number of Accessory Parking Spaces	1,609	
Target Points	23 (75% of 31)	

	Land Use Category D (Other)	
Gross Floor Area (GFA)	45,040	
Occupted Floor Area (OFA)	45,040	
Number of Accessory Parking Spaces	0	
Target Points	3	

Table B.4.1Land Use Tables

	Conditions: Dation 2: or	Points	4		0	۰	
	Conditions: Cotion 4: or		Retail	Office	Residential	Other	
	The state of the s	-	® 1	8 1		0	h
	g Conditions: Option B	-	®	@	8	ò	
	: Option A; or	-	€ 1	1 ⊗	(B)	@	
	: Option B; or	2	@		@	@	
	: Oppor C; or	3	®	®	•	(8)	
	: Option D	4	®		•	ò	1
	DOKETS	-	®	0 1	0	(8)	
	Bike Share Membership: Lucation A; or	÷	0	@	(3)	0	1
A 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Bike Share Membership: Lucation B	2	(8)	(8)	(8)	Ö	1
	Station	-	(B)	(B)	® 1	ò	
E E E E E E E E E E E E E E E E E E E	ance Services	-	•	•	•	a	1
E = 2 E E	10	-	@	@	•	ò	
E	arking	-	@	0	0	ò	1
T 2 2 2 2 2	Car-share Parking and Membership: Option A; or	-	0 1	0 1	0 1	@	
2 2 2 E	Car-share Parking and Membership: Option B; or	2	0	0	0	®	
1 2 2 2 2 2 E	Car-share Parking and Membership: Option C; or	6	(8)	0	0	@	
Z Z Z Z	Car-share Parking and Membership: Option D; or	4	©	0	(0)	a	1
F 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Car-share Parking and Membership: Option E	2	(0)	0	0	Ò	1
Z Z Z	rtive Amenities	-	®	0 1	(a)	ō	1
Z Z Z	y Services	-	(8)	0	0	0	
2 2	nenities: Option A; and/or	-	0	0	•	0	
2 2	nenities: Option B	-	0	0	(8)	0	
2	re	2	® 2	€ 2	® 2	0	
	скаде	2	0	0	9	0	
Contributions or Option B; or Contributions or	Contributions or Incentives for Sustainable Transportation: Option A; or	2	•	@	•	0	1
Contributions or	Contributions or Incentives for Sustainable Transportation: Option B; or	4	•	@	•	0	1
Option C. of	Contributions or Incentives for Sustainable Transportation: Option C; or	9	®	®		0	
Contributions or Option D	Contributions or Incentives for Sustainable Transportation: Option D	8	®	@	8	Ò.	1
HVP2 Shuttle Bus Service: Option A;	wice: Option A; or	1	E 7	F 3	(B)	0	1
Shuttle Bus Service: Option B	vice: Option B	14	B	a	(B)	0	I

explicable to land use category.
 explicable to land use category, see fact sheets for further details regarding project size and/or location.

applicable to land use catgory only if project includes some parking.

 ⁼ not applicable to land use oatagory.
 = project sponsor oan select these measures for land use oatagory D, but will not receive points.

	7 3	1	*	•	o	0	Tabl
Category	Measure	Points	Retail	Office	Residential	Other	е В
	Vanpool Program: Option A; or	-	®	®	0	0	.4.3
	Vanpool Program: Option B; or	2	(B)	B	0	0	3
	Vanpool Program: Option C; or	3	(8)	a	0	0	Lar
	Vanpool Program: Option D; or	4	(8)	(8)	0	0	nd U
	Vanpool Program: Option E; or	2	(8)	(8)	0	0	se T
	Vanpool Program: Option F; or	9	(8)	@	0	0	able
	Vanpool Program: Option G	1	(8)	(8)	0	6	S
MED-1	Multimodal Wayfinding Signage	-	® 1	(E)	®	(E)	
MED-2	Real Time Transportation Information Displays	-		8	(9)	@	
MED-3	Tailored Transportation Marketing Services: Option A; or	-	•	(8)	(E)	0	
	Tailored Transportation Marketing Services: Option B; or	2	® 2	(B) 2	(8)	I	
	Tailored Transportation Marketing Services: Option C; or	6	(8)	(8)	(8)	0	
	Tailored Transportation Marketing Services: Option D	4	(8)	(8)	(8)	0	
H	Healthy Food Retail in Underserved Area	2	(8)	0	0	0	
10-2	On-site Affordable Housing: Option A; or	-	0	0	(8)	0	1
	On-site Affordable Housing: Option B; or	2	0	0		0	
	On-site Affordable Housing: Option C; or	3	0	0	(B)	0	
	On-site Affordable Housing: Option D	4	0	0	(B)	0	
PMG-1	Unbundle Parking: Location A; or	-	@	@@	(B)	0	
	Unbundle Parking: Location B; or	2	00	(B)(B)	(B)(B)	0	
	Unbundle Parking: Location C; or	8	00	(a)(b)	@@ 3	0	
	Unbundle Parking: Location D; or	4	00	(B)	(B)	1	
	Unbundle Parking: Location E	2	6005	80 5	(a)(b)	1	Les
PKG-2	Parking Pricing	2	0 2	0	0	Ō	
PKIE-3	Parking Cash Out: Non-residential Tenants	2	(0)	<u>@</u>	0	0	Lock
P-EN-4	Parking Supply: Option A; or	-	0	0	0	@	
	Parking Supply: Option B; or	2	0	0	0 2	0	
	Parking Supply: Option C; or	3	0	0	0	(0)	
	Parking Supply: Option D; or	4	0	0	0	0	
	Parking Supply: Option E; or	2	(0)	0	0	0	
	Parking Supply: Option F; or	9	0	0	0	0	
	Parking Supply: Option G; or	1	@	0	0	0	
	Parking Supply: Option H; or	8	(a)	0	0	0	-
	Parking Supply: Option I; or	6	0	0	0	0	1 = 1
	Parking Supply: Option J; or	10	0	0	0	Ō	_
	Parking Supply: Option K.	11	@	8	(3)	0	

	Lan	d Use Cat	Land Use Category Totals
se fact shoots for	A	8	U
ind/or location.	Retail	Office	Residential
# broject	Point Subtotal from Page 1: 14	15	14
	Point Subtotal from Page 2: 11	6	6
wasures for	Totals: 25	24	23

 Explicable to land use oetegory.

 Explicable to land use oetegory, see far further details regarding project size and further details regarding project size and (9) = applicable to land use catgory only inoludes some perking.

= not applicable to land use category.
 = project aponsor can select these my land use category D, but will not receive

APPENDICES

[This page intentionally left blank.]

C. Sustainable Neighborhood Framework

The Power Station will be an example for how to convert a formerly polluting power plant into a healthy and sustainable community.

The City of San Francisco has developed a Sustainable Neighborhood Framework that builds on several years of work on San Francisco's "eco-districts." The Framework identifies the sustainability issues of importance to the City for district-scale developments, and provides a common format to organize sustainability goals for each development.

The Power Station project is piloting the use of this Framework. Starting with the draft Framework issued by the City in late 2017, the Power Station team has adapted the Framework to include the sustainability priorities

relevant to the project. The Power Station Framework proposes goals and measures for each priority, cross-referenced with where to find more detailed standards and guidelines in the D4D.

The goals and measures themselves are not regulatory. They are written here, for reference, to demonstrate the strategy that guided the set of standards and guidelines.

Sustainable Neighborhood Framework Approach

One goal of the Potrero Power Station project is to create a low-carbon-emitting community, in response to the site's past use as a power plant and in accordance with San Francisco's ambitious carbon goals. The project aims to reduce Greenhouse Gas (GHG) emissions in ways that also improve air quality, human health and wellness, water conservation, and resilience.

A preliminary GHG emissions assessment was undertaken during the master plan phase to determine where the greatest GHG impact could be made. The findings of this study influenced GHG-reduction strategies in several ways, as described below and illustrated at right.

The largest emitter is transportation, contributing 59% of the site's GHGs. The project's Transportation Demand Management Plan includes measures that address commuter trip reduction, parking policy and pricing, and neighborhood and site enhancements; these reduce GHGs by approximately 20% compared to the baseline for the site.

Building energy use is next greatest, contributing 30% of GHG emissions. Of these, the residential buildings emit the largest part (13%), as this is the largest use in the site plan. Laboratory buildings are next (9%); despite comprising only a few parcels, these buildings have the highest energy use per square foot. The remainder of the 30% comes from commercial buildings (5%), hotels (2%), and retail (1%).


To address building energy GHGs, a smart, thermal energy approach is being connsidered, which pairs buildings of different uses in a way that reduces heating

and cooling energy use. This shared thermal energy approach could reduce GHGs by roughly 10%. The project is also exploring the use of electrical energy for heating, cooling, and domestic hot water; eliminating combustion for these uses reduces GHGs while improving local air quality. Using electricity also means that the project is 'future-proofed' for a low-carbon grid: as the California energy grid adds renewables over time, the Power Station will continue to lower GHG emissions.

The energy model showed that thermal energy plants and electrified buildings together reduced building-related GHGs by approximately 30% over the course of 60 years. Furthermore, buildings will meet San Francisco's Green Building Code, which includes requirements for energy efficiency that get more stringent with each Code cycle, further driving down GHGs.

Lastly, 11% of GHGs came from embodied carbon of materials (the carbon emitted in the extraction, manufacture, transportation, and installation of materials to the site). Of this, approximately 1% was from the site development and 10% from buildings. This level of GHG emissions is kept low via the building performance standards and guidelines of the D4D.

Taken all together, Power Station model shows that these strategies could reduce GHGs by approximately 30%, as compared with a standard development in the same area of San Francisco.

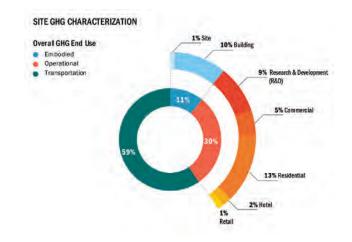




 Table C.4.1
 Sustainable Neighborhood Framework

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + Objective	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Climate	A carbon neutral, adaptable, and healthy physical environment. • carbon positive • healthy • adaptable	Transportation (GHG) Emissions	Planning Code compliant TDM Plan	Key transportation demand measures are integrated into the D4D and outlined in the D4D Appendix B: Transportation Demand Management (TDM). Measures address commute trip reduction, parking policy / pricing, and neighborhood / site enhancement.	05 Streets 5.1 - 5.10 Street Networks 06 Buildings 6.19.4 – Car Share 5.20 – Bicycle Parking Appendix B Transportation Demand Management Plan
		Building Greenhouse Gases (GHG) Eliminate all sources of local GHGs from the built environment and reduce urban heat island impacts.	 Implement measures to reduce GHG emissions from building energy use, based on shared thermal energy plants and all- electric thermal energy systems. Develop comprehensive approach for meaningful green roof to satisfy SF Better Roof Ordinance on specific buildings. 	 Shared thermal energy plants between the following parcels: Blocks 1 and 2; 3 and 4; 6 and 10; 7 and 11; and 8 and 12. These plants, if implemented, would improve the efficiency of heating and cooling site wide, reducing GHG emissions. Potential for all-electric thermal energy systems in each building, including heating, cooling, and domestic hot water systems. 	06 Buildings 6.17 Sustainable Buildings and Human Wellness
Energy	A resource efficient and fossil-fuel free city.	Energy Use Reduce overall consumption and phase out natural gas use across new and existing buildings and infrastructure.	All buildings required to achieve LEEDv4 Gold certification.		06 Buildings 6.17 Sustainable Buildings and Human Wellness

 Table C.14.1 Sustainable Neighborhood Framework (continued)

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + OBJECTIVE	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Water and Stormwater	High-quality and well-managed water systems that eliminate waste, conserve resources and protect watersheds.	Water Use Minimize potable water consumption and use recycled water for all non- potable needs.	 Zero Water Waste: 100% non-potable water for landscape, flushing, cooling. 100% of plantings are climate appropriate. 	 Efficient water fixtures and irrigation systems as per California and San Francisco code. On-site graywater plants in parcels 1, 5, 6, 7 and 8 that charge "purple pipe" and supply non-potable water to all parcels. 	06 Buildings 6.17.3 Recycled Water
		Water Quality Make all local waterways fishable and swimmable every day.	 Zero increase in combined sewage overflows annually. 100% of public realm stormwater managed by green infrastructure. 	 The eastern watershed comprises the majority of the site and will be served by a proposed separated sanitary sewer system; only the western watershed portion of the site will be served by combined sewer. Streetscapes, private alleys, open space and park are anticipated to integrate bio-filtration facilities and/or permeable pavements or surfaces where appropriate. Development blocks will be responsible for treating stormwater runoff within each respective development block using various low impact development (LID) measures. 	04 Open Space 4.7 Stormwater Management 05 Streets 5.14 Stormwater Management PPS Infrastructure Plan Section 14, Sanitary Sewer System Section 16, Stormwater Management
		Flood Protection Ensure flood-safe buildings and sidewalks.	0% building and street assets vulnerable to permanent inundation from sea level rise up to 66-inches above the current 100-year coastal flood elevations.	 Proposed site grading will provide minimum elevations of the proposed structures, streets, and open space areas throughout the site to be protected from 66-inches of future sea level rise. Adaptive management measures for future sea level rise have been included in the Infrastructure Plan. 	03 Open Space 4.3 Resilience and Adaptation PPS Infrastructure Plan Section 5, Sea Level Rise and Adaptive Management Strategy

 Table C.14.1 Sustainable Neighborhood Framework (continued)

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + Objective	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Materials	Material systems that minimize resource use, eliminate waste, and protect health.	Adaptive Reuse Protect architectural and cultural touchstones while reducing embodied carbon from new construction and demolition waste.	-	 The Unit 3 structure and the Stack are proposed to be preserved and adaptively reused. Future adaptation has been considered in the planning and anticipated design for onsite parking. Parking will be centralized in a parking garage anticipated to be designed using flat slabs to increase opportunity for future reuse. 	06 Buildings 6.13 Existing Buildings within the Third Street Industrial District: Unit 3 6.12 Existing Buildings within the Third Street Industrial District: Stack
		Responsible Provisions Focus on repurposed, recycled, sustainably produced & local and non- toxic materials.	 Earn a minimum of three (3) points total under the following LEED materials & resources credits: Building life-cycle impact reduction BPDO: environmental product declarations BPDO: sourcing of raw materials BPDO: material ingredients 	 The project plans to require that each building pursue a minimum number of points under the LEED materials and resources credits listed to the left to encourage disclosure from materials manufacturers and prioritize responsible material selection. The project will prohibit the use of toxic compounds as identified by the 2016 California Green Building Code. 	06 Buildings 6.17 Sustainable Buildings and Human Wellness
		Refuse Reduce solid waste generation and send zero waste to landfills.	Meet City ordinances for waste reduction to support the City-wide Zero Waste Goal Materials and Resources Credits	Credits for Construction and Demolition Waste Management. According to the Waste Management Plan, the proposed project or variant would recycle at least 75 percent of construction waste materials and is in accordance with State and City and County of San Francisco diversion targets that target a minimum of 75 percent of construction and demolition materials to be diverted from landfill disposal. Additional ways to address materials and resources could include achieving points in the following credits: Environmental Product Declarations, Sourcing of Raw Materials, and Material Ingredients.	The project will comply with City ordinances for waste reduction.

 Table C.14.1 Sustainable Neighborhood Framework (continued)

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + OBJECTIVE	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Ecology	Climate resilient and biodiverse ecosystems that are integrated throughout the city and connect people to nature daily.	Biodiversity Climate appropriate, habitat supportive, and interconnected greening is incorporated in the design of the project's open space.	 100% of greening to be climate appropriate or programmed for active use. A portion of greening will be habitat supportive. 	 Tree and understory species should have demonstrated habitat value and be environmentally appropriate. Open space around the site will combine ecological function with programmatic use to provide site services and learning opportunities to visitors and residents. 	04 Open Space 4.1 Open Space Network 4.5 Urban Forest 4.6 Planting, Ecology, and Habitat 05 Streets 5.1 Streets Overview 5.11 Urban Forest 5.13 Streetscape Planting
		Eco-literacy Connect all residents, workers, and visitors to nature; inspire stewardship of our natural heritage.	100% of population on site within a five minute walk to significant habitat.	All Power Station residents and visitors will have access to a variety of landscape-based experiences including access to the Bay at the Waterfront Park with the recreational dock.	04 Open Space 4.1 Open Space Network
Healthy Commu- nity	Neighborhoods that promote health and wellness for all.	Active Remediation Ensure site free from environmental hazards.	 PG&E is undertaking environmental remediation activities to achieve a commercial/industrial land use standard. Ground-disturbing site activities will comply with Article 22A of the Health Code, Maher Ordinance. 		-
		Waterfront Access Connect all residents, workers, and visitors to the Bay as a significant ecological and cultural asset.	 Public access to 1,170 linear feet of waterfront. 100% of waterfront areas to be high quality public space. 	Public, vegetated park at the waterfront Extends the connection of the blue greenway	04 Open Space 4.1 Open Space Network 4.16 – 4.18 Waterfront Park, Waterfront Park – Circulation, Shoreline Open Space Elements Program and Design

 Table C.14.1 Sustainable Neighborhood Framework (continued)

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + OBJECTIVE	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Healthy Community (continued)	Neighborhoods that promote health and wellness for all. (continued)	Active Design Encourage physical activity as part of daily life.	 00% of newly provided public and private streets to have sidewalks and nighttime lighting. ~25% of open space designated for active recreation (e.g., sports fields). 	 Pedestrian-oriented street design including wide sidewalks, clear crossings, ground floor retail and building frontages designed for pedestrian scale. High quality bicycle infrastructure including continuation of the Blue Greenway, safe and convenient Class I and Class II bike parking, on-site bike share, employee showers and lockers, and bicycle repair and maintenance stations. Active recreation open space including a soccer field, playground, and flex fields. Neighborhood retail, residential, and commercial uses including a grocery store and daycare promotes neighborhood walkability. 	02 Land Use 3.2 Ground Floor Uses 04 Open Space 4.1 Open Space Network 4.16 – 4.18 Waterfront Park, Waterfront Park – Circulation, Shoreline Open Space Elements Program and Design 4.20 The Point 4.25 Power Station Park 4.30 Louisiana Paseo 05 Streets 5.2 Pedestrian Network 5.3 Bicycle Network

 Table C.14.1 Sustainable Neighborhood Framework (continued)

PRIORITY	SF LONG-TERM GOAL	SF PERFORMANCE AREA + OBJECTIVE	PROPOSED GOALS FOR THE POWER STATION	MEASURES INCLUDED IN THE POWER STATION	D4D LOCATION
Healthy Community (continued)	Neighborhoods that promote health and wellness for all. (continued)	Air Quality Ensure healthy outdoor and indoor air for everyone.	 No combustion from building heating, cooling and domestic hot water production. Reduction in single-occupancy vehicle use. 25% of parking stalls located in residential buildings will be equipped with a plug for electrical vehicle charging. 	 See transportation demand management plan for SOV reduction strategies. Heating, cooling, and domestic hot water potentially provided by all-electric systems Air purification benefits included as a consideration in street tree selection. Electrical vehicle charging stations provided in addition to code requirements for EVSE ready. 	04 Open Space 4.1 Open Space Network 4.5 Urban Forest 4.6 Planting, Ecology, and Habitat 4.16 – 4.18 Waterfront Park, Waterfront Park – Circulation, Shoreline Open Space Elements Program and Design 05 Streets 5.1 - 5.8 Street Networks 5.11 – Urban Forest 06 Buildings 6.19 – Car Share 5.20 – Bicycle Parking Appendix B Transportation Demand Management Plan
		Healthy Food Healthy, affordable, accessible, locally- produced, and culturally diverse food.		PPS will have a grocery store on site and provides open space on-site that can regularly host a local farmers market.	03 Land Use3.1.3 Permitted Uses Table04 Open Space4.24 Humboldt Street Plaza

D. Power Station Definitions

Accessory Parking. In order to be classified as an accessory use, off-street parking shall meet all of the following conditions:

- (a) Location. Such parking facilities shall be located in any location on the project site, which includes but is not limited to (i) on the same lot as the structure or use served by them or (ii) in a different lot as the structure or use served by them, including in the District Parking Garage or other parking facility on the project site.
- **(b) Parking Exceeding Accessory Amounts.** Accessory parking facilities shall include only those facilities that do not accommodate more cars parked than the amount permitted by the D4D.

Accessory Use. Accessory use is a related minor use that is either (a) necessary to the operation or enjoyment of a lawful principal use or (b) appropriate, incidental, and subordinate to any such use.

Active Use. A building use that does not, by definition, require a non-transparent street façade. See [D4D Land Use Section] for detailed definition.

Agricultural and Beverage Processing 1. See Appendix E.

Americans with Disabilities Act (ADA). Legislation passed in 1990 that prohibits discrimination against people with disabilities. Under this Act, all buildings, streets, and open spaces must be designed to be accessible to people with disabilities.

Apparent Face, Maximum. The maximum length of any unbroken plane of a given building elevation.

Articulation. Minor variations in the massing, setback, height, fenestration, or entrances to a building, which express a change across the elevation or façades of a building. Articulation may be expressed, among other things, as bay windows, porches, building modules, entrances, or eaves.

Arts Activities. See Appendix E.

Attended Facility. A type of Monitored Parking in which an attendant is available to answer questions of Attended Facility users.

Automobile Assembly. See Appendix E.

Awning. A light roof-like structure, supported entirely by the exterior wall of a building, consisting of a movable frame covered with approved cloth, plastic or metal, extending over doors and windows, with the purpose of providing protection from sun and rain and embellishment of the façade.

Bar. See Appendix E.

Bicycle Cages / Rooms. A location that provides bicycle storage within an enclosure accessible only to building residents, non-residential occupants, and employees.

Block. An area of land bounded by public or private right-of-way and/or park.

Building Project. Also referred to as "building". The construction of a building or group of buildings undertaken as a discrete project distinct from the overall Power Station project.

Bulkhead. On a retail storefront, the solid horizontal

element between the sidewalk and the display window, often framed by vertical piers (see also Piers).

Canopy. A light roof-like structure, supported by the exterior of a building consisting of a fixed or removable frame covered with approved cloth, plastic, glass or metal, with the purpose of providing protection from sun and rain and embellishment of the façade.

Car Share. A car share service allows members to rent cars for short periods of time, often by the hour. They provide an alternative to private vehicle ownership, and are attractive to occasional drivers. A car share service maintains its vehicle fleet and provides automobile insurance for its members when they are using a car share vehicle.

Class 1 Bicycle Parking Space(s). Spaces in secure, weather protected facilities intended for use as long term, overnight, and workday bicycle storage by dwelling unit residents, non-residential occupants, and Employees.

Class 2 Bicycle Parking Space(s). Bicycle spaces located in a publicly-accessible, highly visible location intended for transient or short term use by visitors, guests, and patrons to the building or use.

Community Facility. See Appendix E.

Corner. Corners are defined as the first 75 feet from the intersection along the primary frontage of a building and the first 50 feet from the intersection on any other frontage.

Court. Any space on a lot other than a yard that, from a

point not more than two feet above the floor line of the lowest story in the building on the lot in which there are windows from rooms abutting and served by the court, is open and unobstructed to the sky, except for obstructions permitted by this Code. An "outer court" is a court, one entire side or end of which is bounded by a front setback, a rear yard, a side yard, a front lot line, a street, or an alley. An "inner court" is any court that is not an outer court.

Cultural Resources (Contributing Historic Resources).

Cultural resources encompass archaeological, natural, and built environment resources, including but not limited to buildings, structures, objects, districts, and sites. Qualifying cultural resources are designated by local, state, and national registries, such as the National Register of Historic Places.

Curb Cut. A break in the street curb to provide vehicular access from the street surface to private or public property across a continuous sidewalk.

Design for Development. A document that establishes conceptual standards and guidelines for land use, urban form, streets, and public spaces in the project site.

Design Guidelines. Subjective design recommendations that set forth design intent, design expectations, and encouraged or discouraged features.

Design Standards. Mandatory and measurable design specifications applicable to all new construction.

Diagonal Dimension, Maximum. Maximum Diagonal Dimension is defined as the maximum linear diagonal dimension of a building or structure, at a given level,

between the outside surfaces of its exterior walls. The maximum diagonal dimension of a building or structure is the greatest distance connecting two opposing points of the building or structure.

Dwelling Unit. See Appendix E.

Encroachment. A portion of a building that projects into the public right-of-way.

Entertainment, Arts, and Recreation Use. See Appendix F.

Entertainment, General. See Appendix E.

Entertainment, Nighttime. See Appendix E.

Entertainment, Outdoor. See Appendix E.

Façade. Any vertical exterior face or wall of a building that is adjacent to or fronts on a street, public or semi-private right-of-way or open space.

Fenestration. The arrangement of windows and openings on the exterior of the building.

Flexible Land Use Program. Like many locations in San Francisco designated as mixed use, the Power Station SUD provides a flexible land use program, under which certain parcels could be developed primarily for commercial, hotel or residential uses.

Floorplate. The area of a given floor, as bounded by the exterior walls of the floor.

Frontage. The frontage of a building is defined as the vertical exterior face or wall of a building and its linear

extent that is adjacent to or fronts on a street, right-ofway, or open space.

Grocery, General. See Appendix E.

Grocery, Specialty. See Appendix E.

Gross Floor Area. The sum of the gross areas of the several floors of a building or buildings, measured along the glass line at windows at a height of four feet above the finished floor and along a projected straight line parallel to the overall building wall plane connecting the ends of individual windows, provided, however, that such line shall not be inward of the interior face of the wall.

Except as specifically excluded in this definition, "Gross Floor Area" shall include, but not be limited to, the following:

- Basement and cellar space, including tenants' storage areas and all other spaces except that used only for storage or services necessary to the operation or maintenance of the building itself;
- Elevator shafts, stairwells, exit enclosures, and smokeproof enclosures at each floor;
- Floor space in penthouses, except as specifically excluded in this definition;
- Attic space (whether or not a floor has been laid) capable of being made into habitable space;
- Floor space in balconies or mezzanines in the interior of the building;
- Floor space in open or roofed porches, arcades, or exterior balconies, if such porch, arcade, or balcony is located above the ground floor or first floor of

occupancy above basement or garage and is used as the primary access to the interior space it serves; and

 Any other floor space not specifically excluded in this definition.

Gross Floor Area shall not include the following:

- Basement and cellar space used only for storage or services necessary to the operation or maintenance of the building itself;
- Attic space not capable of being made into habitable space;
- Elevator or stair penthouses, accessory water tanks
 or cooling towers, and other mechanical equipment,
 appurtenances, and areas necessary to the operation or
 maintenance of the building itself, if located at the top
 of the building or separated therefrom only by other
 space not included in the gross floor area;
- Mechanical equipment, appurtenances, and areas necessary to the operation or maintenance of the building itself (A) if located at an intermediate story of the building and forming a complete floor level; or (B) if located on a number of intermediate stories occupying less than a full floor level, provided that the mechanical equipment, appurtenances, and areas are permanently separated from occupied floor areas and in aggregate area do not exceed the area of an average floor;
- Outside stairs to the first floor of occupancy at the face of the building which the stairs serve, or fire escapes;
- Floor space dedicated to accessory parking that does not exceed the amount principally permitted as

accessory;

- Floor space dedicated to off street loading and car share parking;
- Bicycle parking that meets the standards described in this Design for Development;
- Arcades, plazas, walkways, porches, breezeways, porticos and similar features (whether roofed or not), at or near street level, accessible to the general public and not substantially enclosed by exterior walls; and accessways to public transit lines, if open for use by the general public; all exclusive of areas devoted to sales, service, display, and other activities other than movement of persons;
- Balconies, porches, roof decks, terraces, courts and similar features, except those used for primary access as described above, provided that:
 - If more than 70 percent of the perimeter of such an area is enclosed, either by building walls (exclusive of a railing or parapet not more than three feet eight inches high) or by such walls and interior lot lines, and the clear space is less than 15 feet in either dimension, the area shall not be excluded from Gross Floor Area unless it is fully open to the sky (except for roof eaves, cornices, or belt courses that project not more than two feet from the face of the building wall).
 - If more than 70 percent of the perimeter of such an area is enclosed, either by building walls (exclusive of a railing or parapet not more than three feet eight inches high), or by such walls and interior lot lines, and the clear space is 15 feet or more in both dimensions: (i) The area shall be excluded from

Gross Floor Area if it is fully open to the sky (except for roof eaves, cornices, or belt courses that project no more than two feet from the face of the building wall); and (ii) The area may have roofed areas along its perimeter which are also excluded from Gross Floor Area if the minimum clear open space between any such roof and the opposite wall or roof (whichever is closer) is maintained at 15 feet (with the above exceptions) and the roofed area does not exceed 10 feet in depth; (iii) In addition, when the clear open area exceeds 625 square feet, a canopy, gazebo, or similar roofed structure without walls may cover up to 10 percent of such open space without being counted as gross floor area.

- If, however, 70 percent or less of the perimeter of such an area is enclosed by building walls (exclusive of a railing or parapet not more than three feet eight inches high) or by such walls and interior lot lines, and the open side or sides face on a yard, street or court whose dimensions satisfy the requirements of this Code and all other applicable codes for instances in which required windows face upon such yard, street, or court, the area may be roofed to the extent permitted by such codes in instances in which required windows are involved;
- On lower, nonresidential floors, elevator shafts and other life-support systems serving exclusively the residential uses on the upper floors of a building;
- One-third of that portion of a window bay that extends beyond the plane formed by the face of the façade on either side of the bay, but not to exceed seven square feet per bay window as measured at each floor;

- Ground floor area devoted to building or pedestrian circulation and building service;
- Floor space devoted to personal services, restaurants, and retail sales of goods, not to exceed 5,000 occupied square feet per use and, in total, not to exceed 75 percent of the area of the ground floor of the building plus the ground level, on-site open space;
- An interior space provided as an open space feature;
- Floor area devoted to child care facilities, provided that:
 - Allowable indoor space is no less than 3,000 square feet and no more than 6,000 square feet,
 - The facilities are made available rent free,
 - Adequate outdoor space is provided adjacent, or easily accessible, to the facility. Spaces such as atriums, rooftops, or public parks may be used if they meet licensing requirements for child care facilities, and
 - The space is used for child care for the life of the building as long as there is a demonstrated need. No change in use shall occur without a finding by the Planning Commission that there is a lack of need for child care and that the space will be used for a facility dealing with cultural, educational, recreational, religious, or social service facilities (described immediately below);
- Floor area permanently devoted to cultural, educational, recreational, religious, or social service facilities available to the general public at no cost or at a fee covering actual operating expenses, provided that

such facilities are:

- Owned and operated by a nonprofit corporation or institution; or
- Are made available rent free for occupancy only by nonprofit corporations or institutions for such functions:
- Floor space devoted to personal services, eating and drinking uses, or retail sales of goods and that is located on the same level as the rooftop park directly accessible thereto by a direct publicly accessible pedestrian connection;
- Publicly accessible space on any story above a height
 of [100] feet devoted to public accommodation that
 offers extensive views, including observation decks,
 sky lobbies, restaurants, bars, or other retail uses,
 as well as any elevators or other vertical circulation
 dedicated exclusively to accessing or servicing such
 space. The space must be open to the general public
 during normal business hours throughout the year, and
 may charge a nominal fee for access; and
- Any area devoted to bicycle parking, bicycle maintenance rooms, or car share spaces when such features are provided as compliance with the Transportation Demand Management Program applicable to the project site.

Group Housing. See Appendix E.

Gym. See Appendix E.

Height. The vertical distance by which a building or structure rises above a certain point of measurement. Height will be measured throughout the project site in

the manner described in the Planning Code.

Historic District (Third Street Industrial Historic District). The Third Street Industrial Historic District was documented in 2008 as part of the Central Waterfront Potrero Point Historic District and is California Registereligible. The district is significant for its association with the industrial development of the city of San Francisco and based on its collection of late-nineteenth and early twentieth century American industrial buildings and structures.

Hospital. See Appendix E.

Hotel. See Appendix E.

HRE. That certain Potrero Power Station Historic Resource Evaluation – Part 1 prepared for Associate Capital by Page and Turnbull, dated as of January 29, 2018, together with that certain Potrero Power Station Historic Resource Evaluation – Part 2 prepared for Associate Capital by Page and Turnbull, dated as of February 2, 2018.

HRER. That certain Historic Resource Evaluation Response regarding Case No. 2017-011878ENV, prepared by the San Francisco Planning Department on April 8, 2018.

Industrial Use. See Appendix E.

Individual Locker. An enclosed and secure bicycle parking space accessible only to the owner or operator of the bicycle or owner and operator of the Locker.

Infill Development. Infill development is a strategy

that is used to repurpose sites within an existing neighborhood. This may include new construction on vacant lots, rezoning underdeveloped areas for new purposes, or modifying existing structures so they can serve a new purpose.

Institutional Use. A Use Category that includes Child Care Facility, Community Facility, Private Community Facility, Hospital, Job Training, Medical Cannabis Dispensary, Philanthropic Administrative Services, Religious Institution, Residential Care Facility, Social Service or Philanthropic Facility, Post-Secondary Educational Institution, Public Facility, School, and Trade School. [Residential Care Facility, for the purposes of the Power Station SUD, is considered a Residential use and is not included in Institutional Uses as defined herein. Hospitals or Medical Centers are excluded from Institutional uses within the Power Station. Other uses within Institutional Use, as defined in the Planning Code may not be permitted within the project.]

Laboratory. See Appendix E.

Lawfully Existing Structures and Uses. Any structure or use for which a permit was lawfully granted prior to 2011, pursuant to Planning Code provisions in effect on the date the permit was attained, and which continued to comply with such provisions are deemed to be a lawfully existing structure or use on that date.

Life Science. See Appendix E.

Liquor Store. See Appendix E.

Livery Stable. See Appendix E.

Locker. A fully enclosed and secure bicycle parking space accessible only to the owner or operator of the bicycle or owner and operator of the Locker.

Manufacturing, Light. See Appendix E.

Massing. Large, urban-scale setbacks, projections, and interventions that are ten feet or more in depth.

Materiality. Non-occupiable features and treatments within the thickness of a façade plane.

Metal Working. See Appendix E.

Micro-Retail. Retail Sales and Service Uses that are 1,000 square foot or smaller.

Mid-block Passage. A publicly-accessible mid-block alley for the entire depth of the property, generally located toward the middle of the subject block face, perpendicular to the subject frontage and connecting to any existing streets and alleys.

Mobile Cart. Any vehicle or pushcart used in conjunction with a commissary or other permanent food facility upon which food is sold or distributed at retail in a static location.

Modulation. Occupiable façade strategies that are generally less than ten feet and more than nine inches in depth.

Monitored Parking. A location where parking spaces are provided within an area under constant surveillance by an attendant or security guard or by a monitored camera.

Nonconforming Use. A "nonconforming use" is a use

that existed lawfully at the effective date of this SUD, or of amendments thereto, and that fails to conform to one or more of the use limitations listed in Table 3.1.2

Nonconforming Structure. A "nonconforming structure" is a structure that existed lawfully at the effective date of this SUD, or of amendments thereto, and that fails to conform to one or more of the use controls included in Section 6.

Office, General. See Appendix E.

Office Use. A grouping of uses that includes General Office, Retail Professional Services, and Non-Retail Professional Services. This use shall exclude: retail uses other than Retail Professional Services; repair; any business characterized by the physical transfer of tangible goods to customers on the premises; wholesale shipping, receiving, and storage; and design showrooms or any other space intended and primarily suitable for display of goods. Other uses within Office Use as defined in the Planning Code may not be permitted within the project.

Open Recreation Area. See Appendix E.

Outdoor Activity Area. See Appendix E.

Parcel. An area of land bounded by public rights-of-way, parks, or private rights-of-way designated alphanumerically as developable portions of land. Used as a unit for assessment.

Parking Garage, District. See Section 5.21 of this D4D.

Parking Garage, Private. A Non-Retail Automotive Use

that provides temporary parking accommodations for automobiles, trucks, vans, bicycles, or motorcycles in a garage not open to the general public, without parking of recreational vehicles, mobile homes, boats. Or other vehicles, or storage of vehicles, goods, or equipment.

Parking Garage, Public. A Retail Automotive Use that provides temporary off-street parking accommodations for automobiles, trucks, vans, bicycles, or motorcycles in a garage open to the general public, without parking of recreational vehicles, mobile homes, boats, or other vehicles, or storage of vehicles, goods, or equipment.

Passive Outdoor Recreation. See Appendix E.

Pedestrian-Oriented. Design of buildings with the pedestrian in mind. Pedestrian-oriented buildings include ground floor transparency, canopies, clear entries, distinct storefronts, and an overall human scale and rhythm.

Permeable Surface. See Appendix E.

Permitted Use. Permitted uses are listed uses that are allowed [as of right].

Plan Dimension, Maximum. Maximum plan dimension is defined as the maximum linear horizontal dimension of a building or structure, at any given level, between the outside surfaces of its exterior walls. The maximum plan dimension of a building or structure is the greatest plan dimension parallel to the long axis of the building or structure.

Piers. On a retail storefront, the solid vertical elements that frame each individual storefront. The rhythm, width,

and depth of piers directly shapes the feeling and scale of a retail frontage.

Production, Distribution, Repair (PDR) Use. A grouping of uses that includes, but is not limited, to Agricultural Uses, Animal Hospital, Automotive Service Station, Automotive Repair, Automotive Wash, Arts Activities, Business Services, Cat Boarding, Catering Service, Kennel, Parcel Delivery Service, Trade Office, and Trade Shop. Other uses within PDR Use as defined in the Planning Code may not be permitted within the project.

Project Sponsor. California Barrel Company LLC or any other entity with rights to develop the property pursuant to the development agreement approved in conjunction with the SUD.

Project. Also known as the "project site," "site," "Potrero Power Station," or "the Power Station" and refers to the approximately 29 acre site comprised of the various subareas shown on Figure 1.2.1.

Projection. A part of a building surface that extends outwards from the primary façade plane. Projections may include balconies, bay windows and other architectural features. Projections may extend into the building setback or the public right-of-way.

Promenade. A paved public pedestrian or bicycle lane, along the Power Station waterfront.

Public Open Space. Open space, including parks and plazas that are accessible to the public at all times of day.

Public Utilities Yard. See Appendix E.

Residential Use. A Use Category consisting of uses that provide housing for San Francisco residents, rather than visitors, including Dwelling Units, Group Housing, Residential Hotels, and Senior Housing, or similar. Residential Care Facilities are also included under Residential Uses. Other uses within Residential Use as defined in the Planning Code may not be permitted within the project.

Restaurant. See Appendix E.

Restaurant, Limited. See Appendix E.

Restricted Access Parking. A location that provides bicycle racks within a locked room or locked enclosure accessible only to the owners of bicycles parked within.

Retail Use. A commercial use that involves the sale of goods, typically in small quantities, or services directly to the ultimate consumer or end user, including, but not limited to, Retail Sales and Service Uses, Commercial Entertainment, and Arts and Recreation Uses. Other uses within Retail Use as defined in the Planning Code may not be permitted within the project.

Right-of-Way (ROW). The public right-of-way (ROW) is the space of the public street bounded by the adjacent building property lines.

Rooftop Area. The surface area of the roof for the portion of the building above which it is situated (i.e., a particular building may have one or many Rooftop Areas, each of which would have an area calculated separately).

Sales and Services, Non-Retail. See Appendix E.

Sales and Services, Retail. See Appendix E.

Service, Business. See Appendix E.

Service, Instructional. See Appendix E.

Service, Non-Retail Professional. See Appendix E.

Service, Personal. See Appendix E.

Screen, Rooftop. Architectural rooftop screening designed to hide mechanical equipment from public view.

Semi-Permanent Kiosk. Any structure used in conjunction with a commissary or other permanent food facility upon which food is sold or distributed at retail in a static location that is capable of being easily removed or relocated. A Semi-Permanent Kiosk does not have a foundation.

Setback (or Setback Zone). The required or actual distance between the vertical edges of a building above a specified height, or between the vertical edge of a building and the property line. The setback may either start at grade creating an open space provided between the property line and the primary built structure, or it may start above a specified height for the purpose of bulk reduction in the mass of the building. The ground area created by a setback imposed at the ground floor level may be required to be dedicated for public use or remain as private space between the public right-of-way and the building mass.

Sightlines. View corridors to a specific site asset (example: historic building, waterfront).

Signboards. On a retail storefront, the solid horizontal element that sits above the door or display windows, often the location where signs are affixed. Signboards are often framed by vertical piers (see also Piers), and may alternately referred to as the transom sash.

Single Room Occupancy (SRO) Unit. See Appendix E.

Storage Yard. See Appendix E.

Student Housing. See Appendix E.

Soffit. A visible underside of projecting architectural elements, including, but not limited to, building connector, roof, balcony, staircase, overhang, canopy, ceiling, bay window, and arch.

Special Use District (SUD). An area designated with a specific set of zoning controls adopted as part of the San Francisco Planning Code.

Stacked Parking. Bicycle parking spaces where racks are stacked and the racks that are not on the ground accommodate mechanically-assisted lifting in order to mount the bicycle.

Stoop. An outdoor entryway into residential units raised above the sidewalk level. Stoops may include steps leading to a small porch or landing at the level of the first floor of the unit.

Storefront. The façade of a retail space between the street grade and the ceiling of the first floor.

Streetwall. A continuous façade of a building and/or buildings along a street frontage.

Tidelands Trust. The public trust for commerce, navigation and fisheries, whereby title to tidelands and lands under navigable waters are held in trust for the benefit of the people of California, as amended.

Trade Offices. See Appendix E.

Transparent Frontage. The condition in which glass, glazing, window, or other building feature allows visibility into the building interior. Does not include heavily tinted or highly mirrored glass.

U-lock. A rigid bicycle lock, typically constructed out of hardened steel composed of a solid U-shaped piece whose ends are connected by a locking removable crossbar.

Use. A use is a specified purpose for which a parcel or property is used, occupied and maintained or leased. Uses within the Power Station SUD are categorized either as Permitted, Permitted with Exceptions, or Not Permitted. Uses apply to all floors, including mezzanines and ground floors, unless otherwise noted.

Vehicle Storage Lot. See Appendix E.

Vertical Bicycle Parking. Bicycle Parking that requires both wheels to be lifted off the ground, with at least one wheel that is no more than 12 inches above the ground.

Wall Sign. See Appendix E.

APPENDICES

E. Applicable Planning Code Sections

SECTION 102. DEFINITIONS¹

Agricultural and Beverage Processing 1. An Industrial use that involves the processing of agricultural products and beverages with a low potential for noxious fumes, noise, and nuisance to the surrounding area, including but not limited to bottling plants, breweries, dairy products plant, malt manufacturing or processing plant, fish curing, smoking, or drying, cereal manufacturing, liquor distillery, manufacturing of felt or shoddy, processing of hair or products derived from hair, pickles, sauerkraut, vinegar, yeast, soda or soda compounds, meat products, and fish oil. This use does not include the processing of wood pulp, and is subject to the operating conditions outlined in Section 202.2(d).

Arts Activities. A retail Entertainment. Arts and Recreation Use that includes performance, exhibition (except exhibition of films), rehearsal, production, postproduction and some schools of any of the following: Dance, music, dramatic art, film, video, graphic art, painting, drawing, sculpture, small-scale glassworks, ceramics, textiles, woodworking, photography, custommade jewelry or apparel, and other visual, performance and sound arts and craft. It shall exclude accredited Schools and Post Secondary Educational Institutions. It shall include commercial arts and art-related business service uses including, but not limited to, recording and editing services, small-scale film and video developing and printing; titling; video and film libraries; special effects production; fashion and photo stylists; production, sale and rental of theatrical wardrobes: and studio property production and rental companies. Arts spaces shall include studios, workshops, archives and theaters, and other similar spaces customarily used principally for arts activities, exclusive of a Movie Theater, Amusement

Enterprise, Adult Entertainment, and any other establishment where liquor is customarily served during performances.

Automobile Assembly. An Industrial Use that involves the assembly of parts for the purpose of manufacturing automobiles, trucks, buses, or motorcycles. This use is subject to operational and location restrictions outlined in Section 202.2(d) of this Code.

Bar. A Retail Sales and Service Use that provides on-site alcoholic beverage sales for drinking on the premises, including bars serving beer, wine and/or liquor to the customer where no person under 21 years of age is admitted (with Alcoholic Beverage Control [ABC] license types 23, 42, 48, or 61) and drinking establishments serving beer where minors are present (with ABC license types 40 or 60) in conjunction with other uses such as Movie Theaters and General Entertainment. Such businesses shall operate with the specified conditions in Section 202.2(a).

Community Facility. An Institutional Community Use that includes community clubhouses, neighborhood centers, community cultural centers, or other community facilities not publicly owned but open for public use in which the chief activity is not carried on as a gainful business and whose chief function is the gathering of persons from the immediate neighborhood in a structure for the purposes of recreation, culture, social interaction, health care, or education other than Institutional Uses as defined in this Section.

Dwelling Unit. A Residential Use defined as a room or suite of two or more rooms that is designed for, or is occupied by, one family doing its own cooking therein and having only one kitchen. A housekeeping room as defined in the Housing Code shall be a Dwelling Unit for purposes of this Code. For the purposes of this Code, a Live/Work

Unit, as defined in this Section, shall not be con-sidered a Dwelling Unit.

Entertainment, Arts and Recreation Use. A Use Category that includes Amusement Game Arcade, Arts Activities, General Entertainment, Livery Stables, Movie Theater, Nighttime Entertainment, Open Recreation Area, Outdoor Entertainment, Passive Outdoor Recreation and Sports Stadiums. Adult Business is not included in this definition, except for the purposes of Development Impact Fee Calculation as described in Article 4.

Entertainment, General. A Retail Entertainment, Arts and Recreation Use that provides entertainment or leisure pursuits to the general public including dramatic and musical performances where alcohol is not served during performances, billiard halls, bowling alleys, skating rinks, and mini-golf, when conducted within a completely enclosed building, and which is adequately soundproofed or insulated so as to confine incidental noise to the premises.

Entertainment, Nighttime. A Retail Entertainment, Arts and Recreation Use that includes dance halls, discotheques, nightclubs, private clubs, and other similar evening-oriented entertainment activities which require dance hall keeper police permits or Place of Entertainment police permits, as defined in Section 1060 of the Police Code, which are not limited to non-amplified live entertainment, including Restaurants and Bars which present such activities, but shall not include any Arts Activity, any theater performance space which does not serve alcoholic beverages during performances, or any temporary uses permitted pursuant to Sections 205 through 205.4 of this Code.

Entertainment, Outdoor. A Retail Entertainment, Arts and Recreation Use that includes circuses, carnivals, or other amusement enterprises not conducted within a building,

¹ Capitalized terms used in this Appendix F that are not individually defined herein are defined in the Planning Code as of the effective date of the SUD

and conducted on premises not less than 200 feet from any R District.

Gift Store-Tourist Oriented. A Retail Sales and Service Use that involves the marketing of small art goods, gifts, souvenirs, curios, or novelties to the public, particularly those who are visitors to San Francisco rather than local residents.

Grocery, General. A Retail Sales and Services Use that:

- (a) Offers a diverse variety of unrelated, non-complementary food and non-food commodities, such as beverages, dairy, dry goods, fresh produce and other perishable items, frozen foods, household products, and paper goods;
- (b) May provide beer, wine, and/or liquor sales for consumption off the premises with a California Alcoholic Beverage Control Board License type 20 (off-sale beer and wine) or type 21 (off-sale general) that occupy less than 15% of the Occupied Floor Area of the establishment (including all areas devoted to the display and sale of alcoholic beverages);
- (c) May prepare minor amounts of food on site for immediate consumption;
- (d) Markets the majority of its merchandise at retail prices; and
- (e) Shall operate with the specified conditions in Section 202.2(a)(1).
- (f) Such businesses require Conditional Use authorization for conversion of a General Grocery use greater than 5,000 square feet, pursuant to Section 202.3 and 303(I).

Grocery, Specialty. A Retail Sales and Services Use that:

(a) Offers specialty food products such as baked goods, pasta, cheese, confections, coffee, meat, seafood, produce, artisanal goods, and other specialty food

products, and may also offer additional food and non-food commodities related or complementary to the specialty food products;

- (b) May provide beer, wine, and/or liquor sales for consumption off the premises with a California Alcoholic Beverage Control Board License type 20 (off-sale beer and wine) or type 21 (off-sale general) which occupy less than 15% of the Occupied Floor Area of the establishment (including all areas devoted to the display and sale of alcoholic beverages);
- (c) May prepare minor amounts of food on site for immediate consumption off-site with no seating permitted; and
- (d) Markets the majority of its merchandise at retail prices.
- (e) Such businesses that provide food or drink per subsections (b) and (c) above shall operate with the specified conditions in Section 202.2(a)(1).

Group Housing. A Residential Use that provides lodging or both meals and lodging, without individual cooking facilities, by prearrangement for a week or more at a time, in a space not defined by this Code as a dwelling unit. Such group housing shall include, but not necessarily be limited to, a Residential Hotel, boardinghouse, guesthouse, rooming house, lodging house, residence club, commune, fraternity or sorority house, monastery, nunnery, convent, or ashram. It shall also include group housing affiliated with and operated by a medical or educational institution, when not located on the same lot as such institution, which shall meet the applicable provisions of Section 304.5 of this Code concerning institutional master plans.

Gym. A Retail Sales and Service Use including a health club, fitness, gymnasium, or exercise facility when including equipment and space for weight-lifting and cardiovascular activities.

Hospital. An Institutional Healthcare Use that includes a hospital, medical center, or other medical institution that provides facilities for inpatient or outpatient medical care and may also include medical offices, clinics, laboratories, and employee or student dormitories and other housing, operated by and affiliated with the institution, which institution has met the applicable provisions of Section 304.5 of this Code concerning institutional master plans.

Hotel. A Retail Sales and Services Use that provides tourist accommodations, including guest rooms or suites, which are intended or designed to be used, rented. or hired out to guests (transient visitors) intending to occupy the room for less than 32 consecutive days. This definition also applies to buildings containing six or more guest rooms designated and certified as tourist units, under Chapter 41 of the San Francisco Administrative Code. For purposes of this Code, a Hotel does not include (except within the Bayshore-Hester Special Use District as provided for in Sections 713 and 780.2 of this Code) a Motel, which contains guest rooms or suites that are independently accessible from the outside, with garage or parking space located on the lot, and designed for, or occupied by, automobile-traveling transient visitors. Hotels shall be designed to include all lobbies, offices, and internal circulation to guest rooms and suites within and integral to the same enclosed building or buildings as the guest rooms or suites.

Industrial Use. A Use Category continuing the following uses: Agricultural and Beverage Processing 1 and 2, Automobile Wrecking, Automobile Assembly, Grain Elevator, Hazardous Waste Facility, Junkyard, Livestock Processing 1 and 2, Heavy Manufacturing 1, 2, and 3, Light Manufacturing, Metal Working, Power Plant, Ship Yard, Storage Yard, Volatile Materials Storage, and Truck Terminal.

Laboratory. A Non-Retail Sales and Services Use intended or primarily suitable for scientific research. The space requirements of uses within this category include

specialized facilities and/or built accommodations that distinguish the space from Office uses, Light Manufacturing, or Heavy Manufacturing. Examples of laboratories include the following:

- (a) Chemistry, biochemistry, or analytical laboratory;
- (b) Engineering laboratory;
- (c) Development laboratory;
- (d) Biological laboratories including those classified by the Centers for Disease Control (CDC) and National Institutes of Health (NIH) as Biosafety level 1, Biosafety level 2, or Biosafety level 3;
- (e) Animal facility or vivarium, including laboratories classified by the CDC/NIH as Animal Biosafety level 1, Animal Biosafety level 2, or Animal Biosafety level 3;
- (f) Support laboratory;
- (g) Quality assurance/Quality control laboratory;
- (h) Core laboratory; and
- (i) Cannabis testing facility (any use requiring License Type 8—Testing Laboratory, as defined in California Business and Professions Code, Division 10).

Life Science. A Non-Retail Sales and Service Use that involves the integration of natural and engineering sciences and advanced biological techniques using organisms, cells, and parts thereof for products and services. This includes the creation of products and services used to analyze and detect various illnesses, the design of products that cure illnesses, and/or the provision of capital goods and services, machinery, instruments, software, and reagents related to research and production. Life Science uses may utilize office, laboratory, light manufacturing, or other types of space. As a subset of Life Science uses, Life Science laboratories typically include biological laboratories and animal facilities or vivaria, as described in the Laboratory

definition Subsections (d) and (e).

Liquor Store. A Retail Sales and Service Use that sells beer, wine, or distilled spirits to a customer in an open or closed container for consumption off the premises and that needs a State of California Alcoholic Beverage Control Board License type 20 (off-sale beer and wine) or type 21 (off-sale general) This classification shall not include retail uses that:

- (a) are both (1) classified as a General Grocery, a Specialty Grocery, or a Restaurant- Limited, and (2) have a Gross Floor Area devoted to alcoholic beverages that is within the applicable accessory use limits for the use district in which it is located, or
- (b) have both (1) a Non-residential Use Size of greater than 10,000 gross square feet and (2) a gross floor area devoted to alcoholic beverages that is within accessory use limits as set forth in Section 204.3 or Section 703(d) of this Code, depending on the zoning district in which the use is located.
- (c) For purposes of Planning Code Sections 249.5, 781.8, 781.9, 782, and 784, the retail uses explicitly exempted from this definition as set forth above shall only apply to General Grocery and Specialty Grocery stores that exceed 5,000 square feet in size shall not:
- (1) sell any malt beverage with an alcohol content greater than 5.7 percent by volume; any wine with an alcohol content of greater than 15 percent by volume, except for "dinner wines" that have been aged two years or more and maintained in a corked bottle; or any distilled spirits in container sizes smaller than 600 milliliters;
- (2) devote more than 15 percent of the gross square footage of the establishment to the display and sale of alcoholic beverages; and
- (3) sell single servings of beer in container sizes 24 ounces or smaller.

Livery Stable. A Retail Entertainment, Arts and Recreation Use where horses and carriages are kept for hire and where stabling is provided. This use also includes horse riding academies.

Manufacturing, Light. An Industrial Use that provides for the fabrication or production of goods, by hand or machinery, for distribution to retailers or wholesalers for resale off the premises, primarily involving the assembly, packaging, repairing, or processing of previously prepared materials. Light manufacturing uses include production and custom activities usually involving individual or special design, or handiwork, such as the following fabrication or production activities, as may be defined by the Standard Industrial Classification Code Manual as light manufacturing uses:

- (a) Food processing;
- (b) Apparel and other garment products;
- (c) Furniture and fixtures:
- (d) Printing and publishing of books or newspapers;
- (e) Leather products;
- (f) Potterv:
- (g) Glass-blowing;
- (h) Commercial laundry, rug cleaning, and dry cleaning facility;
- (i) Measuring, analyzing, and controlling instruments; photographic, medical, and optical goods; watches and clocks: or
- (j) Manufacture of cannabis products or cannabis extracts that are derived without the use of volatile organic compounds (any use requiring License Type 6—Manufacturer 1, as defined in California Business and Professions Code, Division 10).

It shall not include Trade Shop, Agricultural and Beverage Processing 1 or 2, or Heavy Manufacturing 1, 2, or 3. This use is subject to the location and operation controls in Section 202.2(d).

Metal Working. An Industrial use that includes metal working or blacksmith shop; excluding presses of over 20 tons' capacity and machine-operated drop hammers. This use is subject to location and operational controls in Section 202.2(d).

Office, General. A Non-Retail Sales and Service Use that includes space within a structure or portion thereof intended or primarily suitable for occupancy by persons or entities which perform, provide for their own benefit, or provide to others at that location, services including, but not limited to, the following: professional, banking, insurance, management, consulting, technical, sales, and design; and the non-accessory office functions of manufacturing and warehousing businesses, multimedia, software development, web design, electronic commerce, and information technology. This use shall exclude Non-Retail Professional Services as well as Retail Uses; repair; any business characterized by the physical transfer of tangible goods to customers on the premises; wholesale shipping, receiving and storage; and design showrooms or any other space intended and primarily suitable for display of goods.

Open Recreation Area. A Non-Commercial Entertainment, Arts and Recreation Use that is not publicly owned which is not screened from public view, has no structures other than those necessary and incidental to the open land use, is not operated as a gainful business, and is devoted to outdoor recreation such as golf, tennis, or riding.

Outdoor Activity Area. A Commercial Use characteristic defined as an area associated with a legally established use, not including primary circulation space or any public street, located outside of a building or in a courtyard, which is provided for the use or convenience of patrons of a commercial establishment including, but not limited

to, sitting, eating, drinking, dancing, and food-service activities.

Parking Lot, Private. A Non-Retail Automotive Use that provides temporary off-street parking accommodations for private automobiles, trucks, vans, bicycles, or motorcycles on an open lot or lot surrounded by a fence or wall not open to the general public, without parking of recreational vehicles, motor homes, boats, or other vehicles, or storage of vehicles, goods, or equipment. Provisions regulating automobile parking are set forth in Sections 155, 156, 303(t) or (u) and other provisions of Article 1.5 of this Code

Parking Lot, Public. A Retail Automotive Use that provides temporary parking accommodations for private automobiles, trucks, vans, bicycles, or motorcycles on an open lot or lot surrounded by a fence or wall open to the general public, without parking of recreational vehicles, motor homes, boats, or other vehicles, or storage of vehicles, goods, or equipment. Provisions regulating automobile parking are set forth in Sections 155, 156, 303(t) or (u) and other provisions of Article 1.5 of this Code.

Passive Outdoor Recreation. A Non-Commercial Entertainment, Arts and Recreation Use defined as an open space used for passive recreational purposes that is not publicly owned and is not screened from public view, has no structures other than those necessary and incidental to the open land use, is not served by vehicles other than normal maintenance equipment, and has no retail or wholesale sales on the premises. Such open space may include, but not necessarily be limited to, a park, playground, or rest area.

Permeable Surface. Permeable surfaces are those that allow stormwater to infiltrate the underlying soils. Permeable surfaces shall include, but not be limited to, vegetative planting beds, porous asphalt, porous concrete, single-sized aggregate, open-jointed blocks, stone, pavers, or brick that are loose-set and without mortar. Permeable

surfaces are required to be contained so neither sediment nor the permeable surface discharges off the site.

Public Utilities Yard. A Utility and Infrastructure Use that is defined as a service yard for public utility, or public use of a similar character, if conducted entirely within an area completely enclosed by a wall or concealing fence not less than six feet high.

Restaurant. A Retail Sales and Service use that serves prepared, ready-to-eat cooked foods to customers for consumption on the premises and which has seating. As a minor and incidental use, it may serve such foods to customers for off-site consumption. It may provide on-site beer, wine, and/or liquor sales for drinking on the premises (with ABC license types 41, 47, 49, 59, or 75); however, if it does so, it shall be required to operate as a Bona Fide Eating Place. It is distinct and separate from a Limited-Restaurant. Such businesses shall operate with the specified conditions in Section 202.2(a)(1).

It shall not be required to operate within an enclosed building so long as it is also a Mobile Food Facility. Any associated outdoor seating and/or dining area is subject to regulation as an Outdoor Activity Area as set forth elsewhere in this Code.

Restaurant, Limited. A Retail Sales and Service Use that serves ready-to-eat foods and/or drinks to customers for consumption on or off the premises, that may or may not have seating. It may include wholesaling, manufacturing, or processing of foods, goods, or commodities on the premises as an Accessory Use as set forth in Sections 204.3 or 703.2 depending on the zoning district in which it is located. It includes, but is not limited to, foods provided by sandwich shops, coffee houses, pizzerias, ice cream shops, bakeries, delicatessens, and confectioneries meeting the above characteristics, but is distinct from a Specialty Grocery, Restaurant, and Bar. Within the North Beach SUD, it is also distinct from Specialty Food Manufacturing, as defined in Section 780.3(b). It shall not provide on-site beer and/or wine

sales for consumption on the premises, but may provide off-site beer and/or wine sales for consumption off the premises with a California Alcoholic Beverage Control Board License type 20 (off-sale beer and wine), that occupy less than 15% of the Occupied Floor Area of the establishment (including all areas devoted to the display and sale of alcoholic beverages). Such businesses shall operate with the specified conditions in Section 202.2(a) (1).

Sales and Services, Non-Retail. A Commercial Use category that includes Uses that involve the sale of goods or services to oter businesses rather than the end user, or that does not provide for direct sales to the consumer on site. Uses in this category include, but are not limited to: Business Services, Catering, Commercial Storage, Design Professional, General Office, Laboratory, Life Science, Non-Retail Professional Service, Trade Office, Wholesale Sales, and Wholesale Storage.

Sales and Services, Retail. A Commercial Use category that includes Uses that involve the sale of goods. typically in small quantities, or services directly to the ultimate consumer or end user with some space for retail service on site, excluding Retail Entertainment Arts and Recreation, and Retail Automobile Uses and including. but not limited to: Adult Business, Animal Hospital, Bar, Cannabis Retail, Cat Boarding, Chair and Foot Massage, Tourist Oriented Gift Store, General Grocery, Specialty Grocery, Gym, Hotel, Jewelry Store, Kennel, Liquor Store, Massage Establishment, Mortuary (Columbarium), Motel, Non-Auto Sales, Pharmacy, Restaurant, Limited Restaurant, General Retail Sales and Service, Financial Service, Fringe Financial Service, Limited Financial Service, Health Service, Instructional Service, Personal Service, Retail Professional Service, Self-Storage, Tobacco Paraphernalia Establishment, and Trade Shop.

Service, Business. A Non-Retail Sales and Service Use that provides the following kinds of services to businesses and/or to the general public and does not fall under the definition of Office: radio and television stations,

newspaper bureaus, magazine and trade publication publishing, microfilm recording, slide duplicating, bulk mail services, parcel shipping services, parcel labeling and packaging services, messenger delivery/courier services, sign painting and lettering services, or building maintenance services.

Service, Instructional. A Retail Sales and Service Use that includes instructional services not certified by the State Educational Agency, such as art, dance, exercise, martial arts, and music classes.

Service, Non-Retail Professional. A Non-Retail Sales and Service Office Use that provides professional services to other businesses including, but not limited to, accounting, legal, consulting, insurance, real estate brokerage, advertising agencies, public relations agencies, computer and data processing services, employment agencies, management consultants and other similar consultants, telephone message services, and travel services. This use may also provide services to the general public but is not required to. This use shall not include research services of an industrial or scientific nature in a commercial or medical laboratory, other than routine medical testing and analysis by a health-care professional or hospital.

Service, Personal. A Retail Sales and Services Use that provides grooming services to the individual, including salons, cosmetic services, tattoo parlors, and health spas, bathhouses, and steam rooms. Personal Service does not include Massage Establishments or Gym, which are defined separately in this Section.

Single Room Occupancy (SRO) Unit. A Residential Use characteristic, defined as a Dwelling Unit or Group Housing room consisting of no more than one occupied room with a maximum gross floor area of 350 square feet and meeting the Housing Code's minimum floor area standards. The unit may have a bathroom in addition to the occupied room. As a Dwelling Unit, it would have a cooking facility and bathroom. As a group housing room.

it would share a kitchen with one or more other single room occupancy unit/s in the same building and may also share a bathroom. A single room occupancy building (or "SRO" building) is one that contains only SRO units and accessory living space.

Storage Yard. An Industrial Use involving the storage of building materials or lumber, stones or monuments, livestock feed, or contractors' equipment, if conducted within an area enclosed by a wall or concealing fence not less than six feet high. This use does not include Vehicle Storage or a Hazardous Waste Facility.

Student Housing. A Residential Use characteristic defined as a living space for students of accredited Post-Secondary Educational Institutions that may take the form of Dwelling Units, Group Housing, or SRO Unit and is owned, operated, or otherwise controlled by an accredited Post-Secondary Educational Institution. Unless expressly provided for elsewhere in this Code, the use of Student Housing is permitted where the form of housing is permitted in the underlying Zoning District in which it is located. Student Housing may consist of all or part of a building, and Student Housing owned, operated, or controlled by more than one Post-Secondary Educational Institution may be located in one building.

Trade Offices. A Non-Retail Sales and Service Use that includes business offices of building, plumbing, electrical, painting, roofing, furnace, or pest control contractors, if no storage of equipment or items for wholesale use are located on site. It may also include incidental accessory storage of office supplies and samples if located entirely within an enclosed building having no openings other than fixed windows or exits required by law within 50 feet of an R District, and if the storage of equipment and supplies does not occupy more than of the total gross floor area of the use. No processing of building materials, such as mixing of concrete or heating of asphalt shall be conducted on the premises. Parking, loading, and unloading of all vehicles used by the contractor shall be located entirely within the building

APPENDICES

containing the use.

Vehicle Storage Lot. A Retail Automotive Use that provides for the storage of buses, recreational vehicles, mobile homes, trailers, or boats and/or storage for more than 72 hours of other vehicles on an open lot. It shall not include rooftop storage. Vehicle Storage Lots shall comply with the Screening and Greening requirements of Section 142.

SECTION 136. OBSTRUCTIONS OVER STREETS AND ALLEYS AND IN REQUIRED SETBACKS, YARDS, AND USEABLE OPEN SPACE

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(a) The following obstructions shall be permitted, in the manner specified, as indicated by the symbol "X" in the columns at the left, within the required open areas listed herein:
				(1) Projections from a building or structure extending over a street or alley as defined by this Code. Every portion of such projections over a street or alley shall provide a minimum of 7½ feet of vertical clearance from the sidewalk or other surface above which it is situated, or such greater vertical clearance as may be required by the San Francisco Building Code, unless the contrary is stated below. The permit under which any such projection over a street or alley is erected over public property shall not be construed to create any perpetual right but is a revocable license;
				(2) Obstructions within legislated setback lines and front setback areas, as required by Sections 131 and 132 of this Code;
				(3) Obstructions within side yards and rear yards, as required by Sections 133 and 134 of this Code;
				(4) Obstructions within usable open space, as required by Section 135 of this Code
				(b) No obstruction shall be constructed, placed, or maintained in any such required open area except as specified in this Section.
				(c) The permitted obstructions shall be as follows:
X	X	X	X	(1) Overhead horizontal projections (leaving at least 7½ feet of headroom) of a purely architectural or decorative character such as cornices, eaves, sills and belt courses, with a vertical dimension of no more than two feet six inches, not increasing the floor area or the volume of space enclosed by the building, and not projecting more than:
				(A) At roof level, three feet over streets and alleys and into setbacks, or to a perimeter in such required open areas parallel to and one foot outside the surfaces of bay windows immediately below such features, whichever is the greater projection,

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(C) Three feet into yards and usable open space, or 1/6 of the required minimum dimensions (when specified) of such
X	X	X	X	open areas, whichever is less; (2) Bay (projecting) windows, balconies (other than balconies used for primary access to two or more dwelling units or two or more bedrooms in group housing), and similar features that increase either the floor area of the building or the volume of space enclosed by the building above grade, when limited as specified herein. With respect to obstructions within yards and usable open space, the bay windows and balconies specified in Paragraph (c)(3) below shall be permitted as an alternative to those specified in this Paragraph (c)(2). (A) The minimum headroom shall be 7½ feet.

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(B) Projection into the required open area shall be limited to three feet, provided that projection over streets and alleys shall be further limited to two feet where the sidewalk width is nine feet or less, and the projection shall in no case be closer than eight feet to the centerline of any alley. STREET
				sidewalk sidewalk bay window ALLEY center line of alley—
				width 9 ft. or less maximum projection projection
				(C) The glass areas of each bay window, and the open portions of each balcony, shall be not less than 50 percent of the sum of the areas of the vertical surfaces of such bay window or balcony above the required open area. At least 1/3 of such required glass area of such bay window, and open portions of such balcony, shall be on one or more vertical surfaces situated at an angle of not less than 30 degrees to the line establishing the required open area. In addition, at least 1/3 of such required glass area or open portions shall be on the vertical surface parallel to, or most nearly parallel to, the line establishing each open area over which the bay window or balcony projects.

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(D) The maximum length of each bay window or balcony shall be 15 feet at the line establishing the required open area, and shall be reduced in proportion to the distance from such line by means of 45 degree angles drawn inward from the ends of such 15-foot dimension, reaching a maximum of nine feet along a line parallel to and at a distance of three feet from the line establishing the required open area.
				9 ft. maximum line establishing required open area bay window 15 ft. maximum
				(E) Where a bay window and a balcony are located immediately adjacent to one another, and the floor of such balcony in its entirety has a minimum horizontal dimension of six feet, the limitations of Subparagraph (c)(2)(D) above shall be increased to a maximum length of 18 feet at the line establishing the required open area, and a maximum of 12 feet along a line parallel to and at a distance of three feet from the line establishing the required open area.
				6 ft. minimum for floor
				bay window line establishing required open area

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(F) The minimum horizontal separation between bay windows, between balconies, and between bay windows and balconies (except where a bay window and a balcony are located immediately adjacent to one another, as provided for in Subparagraph (c)(2)(E) above), shall be two feet at the line establishing the required open area, and shall be increased in proportion to the distance from such line by means of 135-degree angles drawn outward from the ends of such two-foot dimension, reaching a minimum of eight feet along a line parallel to and at a distance of three feet from the line establishing the required open area.
				(G) Each bay window or balcony over a street or alley, setback or rear yard shall also be horizontally separated from interior lot lines (except where the wall of a building on the adjoining lot is flush to the interior lot line immediately adjacent to the projecting portions of such bay window or balcony) by not less than one foot at the line establishing the required open area, with such separation increased in proportion to the distance from such line by means of a 135-degree angle drawn outward from such one-foot dimension, reaching a minimum of four feet along a line parallel to and at a distance of three feet from the line establishing the required open area; 8 ft. minimum 4 ft. minimum 135° Iline establishing required open area

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
		Х	х	(3) Bay (projecting) windows, balconies (other than balconies used for primary access to two or more dwelling units or two or more bedrooms in group housing), and similar features that increase either the floor area of the building or the volume of space enclosed by the building above grade, when limited as specified herein. With respect to obstructions within yards and usable open space, the bay windows and balconies specified in Paragraph (c)(2) above shall be permitted as an alternative to those specified in this Paragraph (c)(3).
				(A) The minimum headroom shall be $7\frac{1}{2}$ feet.
				(B) Projection into the required open area shall be limited to three feet, or 1/6 of the required minimum dimension (when specified) of the open area, whichever is less.
				(C) In the case of bay windows, the maximum length of each bay window shall be 10 feet, and the minimum horizontal separation between bay windows shall be five feet, above all parts of the required open area.
				(D) The aggregate length of all bay windows and balconies projecting into the required open area shall be no more than 2/3 the buildable width of the lot along a rear building wall, 2/3 the buildable length of a street side building wall, or 1/3 the length of all open areas along the buildable length of an interior side lot line; in the case of yards, these limits on aggregate length shall apply to the aggregate of all bay windows, balconies, fire escapes and chimneys.
				line establishing required open area
				bay window fire escape 10 ft. maximum To ft. maximum maximum total of 2/3 buildable width of lot along rear building wall bay window page 5 ft. yard or usable open space
X	X	X	X	(4) Fire escapes, leaving at least 7½ feet of headroom exclusive of drop ladders to grade, and not projecting more than necessary for safety or in any case more than four feet six inches into the required open area. In the case of yards, the aggregate length of all bay windows, balconies, fire escapes and chimneys that extend into the required open area shall be no more than 2/3 the buildable width of the lot along a rear building wall, 2/3 the buildable length of a street side building wall, or 1/3 the buildable length of an interior side lot line;

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
			X	(5) Overhead horizontal projections other than those listed in Paragraphs (c)(1), (2), (3) and (4) above, leaving at least 7½ feet of headroom, where the depth of any such projection is no greater than the headroom it leaves, and in no case is greater than 10 feet; and provided that, in the case of common usable open space at ground level, the open space under the projection directly adjoins uncovered usable open space that is at least 10 feet in depth and 15 feet in width;
		X		(6) Chimneys not extending more than three feet into the required open area or 1/6 of the required minimum dimension (when specified) of the open area, whichever is less; provided, that the aggregate length of all bay windows, balconies, fire escapes and chimneys that extend into the required open area is no more than 2/3 the buildable width of the lot along a rear building wall, 2/3 the buildable length of a street side building wall, or 1/3 the buildable length of an interior side lot line;
X				(7) Temporary occupancy of street and alley areas during construction and alteration of buildings and structures, as regulated by the Building Code and other portions of the Municipal Code;
Х				(8) Space below grade, as regulated by the Building Code and other portions of the Municipal Code;
X	X			(9) Building curbs and buffer blocks at ground level, not exceeding a height of nine inches above grade or extending more than nine inches into the required open area;
X	Х			(10) Signs as regulated by Article 6 of this Code, at locations and to the extent permitted therein;
Х	Х			(11) Flagpoles for projecting flags permitted by Article 6 of this Code;
Х	Х			(12) Awnings, Canopies, and Marquees and for Limited Commercial Uses in Residential and RTO Districts, as defined in Section 102 and regulated by the Building Code, and as further limited in Section 136.1 and other provisions of this Code;

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
	X	X	X	(13) Retaining walls that are necessary to maintain approximately the grade existing at the time of construction of a building. Other retaining walls and the grade maintained by them shall be subject to the same regulations as decks (see Paragraphs (c)(24) and (c)(25) below);
				existing grade existing grade SECTION
	Х	Х	X	(14) Steps of any type not more than three feet above grade, and uncovered stairways and landings not extending higher than the floor level of the adjacent first floor of occupancy above the ground story, and, in the case of yards and usable open space, extending no more than six feet into the required open area for any portion that is more than three feet above grade, provided that all such stairways and landings shall occupy no more than 2/3 the buildable width of the lot along a front or rear building wall, 2/3 the buildable length of a street side building wall, or 1/3 the length of all open areas along the buildable length of an interior side lot line;
X	Х	Х	X	(15) Railings no more than three feet six inches in height above any permitted step, stairway, landing, fire escape, deck, porch or balcony, or above the surface of any other structure permitted in the required open area.
	Х	Х	Х	(16) Decorative railings and decorative grille work, other than wire mesh, at least 75 percent open to perpendicular view and no more than six feet in height above grade;
	Х	Х	Х	(17) Fences no more than three feet in height above grade;
		Х	Х	(18) Fences and wind screens no more than six feet in height above grade;
		Х		(19) Fences and wind screens no more than 10 feet in height above grade;
		Х	Х	(20) Normal outdoor recreational and household features such as play equipment and drying lines;
	Х	Х	Х	(21) Landscaping and garden furniture;

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
		Х	Х	(22) Garden structures enclosed by walls on no more than 50 percent of their perimeter, such as gazebos and sunshades, if no more than eight feet in height above grade and covering no more than 60 square feet of land;
		Х		(23) Other structures commonly used in gardening activities, such as greenhouses and sheds for storage of garden tools, if no more than eight feet in height above grade and covering no more than 100 square feet of land;
		Х		(24) Decks, whether attached to a building or not, at or below the adjacent first floor of occupancy, if developed as usable open space and meeting the following requirements:
				(A) Slope of 15 percent or less. The floor of the deck shall not exceed a height of three feet above grade at any point in the required open area, nor shall such floor penetrate a plane made by a vertical angle 45 degrees above horizontal with its vertex three feet above grade at any lot line bordering the required open area,
				downslope— 15% or less rear lot line 3ft. maximum required fear yerd SECTION upslope—
				rear lot line 3 ft. maximum required rear yard SECTION

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(B) Slope of more than 15 percent and no more than 70 percent. The floor of the deck shall not exceed a height of three feet above grade at any point along any lot line bordering the required open area, nor shall such floor penetrate a plane made by a vertical angle 45 degrees above horizontal with its vertex three feet above grade at any lot line bordering the required open area, except that when two or more lots are developed with adjacent decks whose floor levels differ by not more than three feet, whether or not the lots will remain in the same ownership, each deck may come all the way to the lot line adjacent to the other deck. In addition, the vertical distance measured up from grade to the floor of the deck shall not exceed seven feet at any point in the required open area, downslope— 16% to 70% 7ft. maximum 7gt. maximum required rear yard SECTION

SET- BACKS	YARDS	USABLE OPEN SPACE	
			(C) Slope of more than 70 percent. Because in these cases the normal usability of the required open area is seriously impaired by the slope, a deck covering not more than 1/3 the area of the required open area may be built exceeding the heights specified above, provided that the light, air, view, and privacy of adjacent lots are not seriously affected. Each such case shall be considered on its individual merits. However, the following points shall be considered guidelines in these cases:
			(i) The deck shall be designed to provide the minimum obstruction to light, air, view and privacy.
			(ii) The deck shall be at least two feet inside all side lot lines.
			(iii) On downhill slopes, a horizontal angle of 30 degrees drawn inward from each side lot line at each corner of the rear building line shall be maintained clear, and the deck shall be kept at least 10 feet inside the rear lot line;
	Х		(25) Except in required side yards, decks, and enclosed and unenclosed extensions of buildings, when limited as specified herein:
			(A) The structure shall extend no more than 12 feet into the required open area; and shall not occupy any space within the rear 25 percent of the total depth of the lot, or within the rear 15 feet of the depth of the lot, whichever is greater,
			(B) Within all parts of the required open area, the structure shall be limited in height to either:
			(i) 10 feet above grade, or
			subject property
			12 ft. maximum extension cannot occupy rear 25% of lot depth or rear 15 ft. whichever is greater maximum height 10 ft. above grade
		BACKS	BACKS OPEN SPACE

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(ii) A height not exceeding the floor level of the second floor of occupancy, excluding the ground story, at the rear of the building on the subject property, in which case the structure shall be no closer than five feet to any interior side lot line, subject property maximum height not exceeding floor level of adject second floor of occupancy adject second floor of occupancy scotlang ground story solutions or level of lot dight or level 15 ft. whichever is greater
				(C) Any fence or wind screen extending above the height specified in Subparagraph (c)(25)(B) shall be limited to six feet above such height; shall be no closer to any interior side lot line than one foot for each foot above such height; and shall have not less than 80 percent of its surfaces above such height composed of transparent or translucent materials;
		Х		(26) Garages which are underground, or under decks conforming to the requirements of Paragraph (c)(24) or (c)(25) above, if their top surfaces are developed as usable open space, provided that no such garage shall occupy any area within the rear 15 feet of the depth of the lot;

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
ALLEYS	X		SPACE	(27) Garages, where the average slope of the required open area ascends from the street lot line to the line at the setback and exceeds 50 percent, provided the height of the garage is limited to 10 feet above grade, or the floor level of the adjacent first floor of occupancy on the subject property, whichever height is less; slope of setback area exceeds 50% height not to exceed floor level of adjacent first floor of occupancy STREET
				SECTION Reserved.

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE					
		Х		street and an a a garage struct does not excee	alley, and both adjoinin cure adjacent to the req ad the average of the tw	g lots (or the one adjoini juired rear yard on the su o adjacent garage struct	ng lot where the subject propublect property, provided the	t line along streets, alleys, or a perty is also a corner lot) contain garage on the subject property age structure where the subject ar vard.
				RALLEY	existing garage		existing adjacent building	OR ALLEY
				STREET OR ALLEY	new garage		subject property	De STREET OR
				rear lot line	existing garage		existing adjacent building	front lot line
X	Х	X X	X	of the subject part of such access, and	property other than in a nd in no case shall par	a required open area, and king be allowed in the se	d where such driveway has or	it is located in the buildable area ally the minimum width needed for
		^	_ ^		_		8 and has remained in said t	

STREETS AND ALLEYS	SET- BACKS	YARDS	USABLE OPEN SPACE	
				(d) Notwithstanding the limitations of Subsection (c) of this Section, the following provisions shall apply in C-3 districts:
				(1) Decorative Architectural Features. Decorative architectural features not increasing the interior floor area or volume of the space enclosed by the building are permitted over streets and alleys and into setbacks within the maximum vertical and horizontal dimensions described as follows:
				(A) At roof level, decorative features such as cornices, eaves, and brackets may project four feet in districts other than C-3-O(SD) and 10 feet in the C-3-O(SD) district with a maximum vertical dimension no greater than six feet.
				(B) At all levels above the area of minimum vertical clearance required in Subsection (a)(1) above, decorative features, such as belt courses, entablatures, and bosses, may project two feet, with a maximum vertical dimension of four feet, except that in the C-3-O(SD) district at all levels above a minimum vertical clearance of 20 feet from sidewalk grade, decorative features may project half the width of the sidewalk up to a maximum projection of 10 feet.
				(C) At all levels above the area of minimum vertical clearance required by Subsection (a)(1) above, vertical decorative features, such as pilasters, columns, and window frames (including pediment and sills), with a cross-sectional area of not more than three square feet at midpoint, may project one foot horizontally.
				(2) Bay Windows. Notwithstanding the provisions of Subsections (c)(2)(D) and (F) of this Section, bay windows on nonresidential floors of a structure are permitted only if the width of the bay is at least two times its depth, the total width of all bays on a façade plane does not exceed ½ of the width of the façade plane, and the maximum horizontal (plan) dimensions of the bay fit within the dimensions set forth in the diagram below.
				Commerial Bay
				a commercial bay must fit within these dimensions
				2 ft. minimum space to building corner or another bay 2 ft. minimum space to building corner or another bay 2 ft. minimum width of this surface shall be at least two times the depth of the bay 2 ft. maximum depth 45°

SECTION 138.1. STREETSCAPE AND PEDESTRIAN IMPROVEMENTS.

#	PHYSICAL ELEMENT	BETTER STREETS PLAN SECTION	#	PHYSICAL ELEMENT	BETTER STREETS PLAN SECTION
1	Curb ramps*	5.1	22	Modern roundabouts	5.7
2	Marked crosswalks*	5.1	23	Sidewalk or median pocket parks	5.8
3	Pedestrian-priority signal devices and timings	5.1	24	Reuse of 'pork chops' and excess right-of-way	5.8
4	High-visibility crosswalks	5.1	 25	Multi-way boulevard treatments	5.8
5	Special crosswalk treatments	5.1	26	Shared public ways	5.8
6	Restrictions on vehicle turning movements at crosswalks	5.1	27	Pedestrian-only streets	5.8
7	Removal or reduction of permanent crosswalk closures	5.1	28	Public stairs	5.8
8	Mid-block crosswalks	5.1	29	Street trees*	6.1
9	Raised crosswalks	5.1	30	Tree basin furnishings*	6.1
10	Curb radius guidelines	5.2	31	Sidewalk planters*	6.1
11	Corner curb extensions or bulb-outs*	5.3	32	Above-ground landscaping	6.1
12	Extended bulb-outs	5.3	33	Stormwater management tools*	6.2
13	Mid-block bulb-outs	5.3	34	Street and pedestrian lighting*	6.3
14	Center or side medians	5.4	35	Special paving*	6.4
15	Pedestrian refuge islands	5.4	36	Site furnishings*	6.5
16	Transit bulb-outs	5.5	37	Driveways	6.6
17	Transit boarding islands	5.5	Table I	E.4.1 Pedestrian and Streetscape Elements per the Better S	Streets Plan(2010)
18	Flexible use of the parking lane	5.6	 standa	rd streetscape elements marked with a *. (Requirement varies	
19	Parking lane planters	5.6	Streets	s Plan)	
			_		

5.7

5.7

20

21

Chicanes

Traffic calming circles

- (c) Required streetscape and pedestrian improvements. Development projects shall include streetscape and pedestrian improvements on all publicly accessible rights-of-way directly fronting the property as follows:
 - (2) Other streetscape and pedestrian elements for large projects.
 - (A) Application.
 - (i) In any district, streetscape and pedestrian elements in conformance with the Better Streets Plan shall be required, if all the following conditions are present: (1) the project is on a lot that (a) is greater than one-half acre in total area, (b) contains 250 feet of total lot frontage on one or more publicly-accessible rights-of-way, or (c) the frontage encompasses the entire block face between the nearest two intersections with any other publicly-accessible rights-of-way, and (2) the project includes (a) new construction or (b) addition of 20% or more of gross floor area to an existing building.
 - (ii) Project Sponsors that meet the thresholds of this Subsection shall submit a streetscape plan to the Planning Department showing the location, design, and dimensions of all existing and proposed streetscape elements in the public right-of-way directly adjacent to the fronting property, including street trees, sidewalk landscaping, street lighting, site furnishings, utilities, driveways, and curb lines, and the relation of such elements to proposed new construction and site work on the subject property.
 - (B) Standards.
 - (i) Required streetscape elements. A continuous soil-filled trench parallel to the curb shall connect all street tree basins for those street trees required under the Public Works Code. The trench may be covered only by permeable surfaces as defined in Section 102 of the Planning Code, except at required tree basins, where the soil must remain uncovered. The Director of Planning, or his or her designee, may modify or waive this requirement where a continuous trench is not possible due to the location of existing utilities, driveways, sub-sidewalk basements, or other pre-existing surface or sub-surface features.

- (ii) Additional streetscape elements. The Department shall consider, but need not require, additional streetscape elements for the appropriate street type per Table E.14.1and the Better Streets Plan, including benches, bicycle racks, curb ramps, corner curb extensions, stormwater facilities, lighting, sidewalk landscaping, special sidewalk paving, and other site furnishings, excepting crosswalks and pedestrian signals.
 - a. Streetscape elements shall be selected from a City-approved palette of materials and furnishings, where applicable, and shall be subject to approval by all applicable City agencies.
 - b. Additionally, streetscape elements shall be consistent with the overall character and materials of the district, and shall have a logical transition or termination to the sidewalk and/or roadway adjacent to the fronting property.
- (iii) Sidewalk widening. The Planning Department in consultation with other agencies shall evaluate whether sufficient roadway space is available for sidewalk widening for the entirety or a portion of the fronting public right-of-way in order to meet or exceed the recommended sidewalk widths for the appropriate street type per Table E.14.2 and the Better Streets Plan and/or to provide additional space for pedestrian and streetscape amenities. If it is found that sidewalk widening is feasible and desirable, the Planning Department shall require the owner or developer to install such sidewalk widening as a condition of approval, including all associated utility re-location, drainage, and street and sidewalk paying.
- (iv) Minimum sidewalk width. New publicly-accessible rights-of-way proposed as part of development projects shall meet or exceed the recommended sidewalk widths for the appropriate street type per Table E.14.2. Where a consistent front building setback of 3 feet or greater extending for at least an entire block face is provided, the recommended sidewalk width may be reduced by up to 2 feet.

	STREET TYPE (PER BETTER STREETS PLAN)	RECOMMENDED SIDEWALK WIDTH (MINIMUM REQUIRED FOR NEW STREETS)
Commercial	Downtown commercial	See Downtown Streetscape Plan
	Commercial throughway	15'
-	Neighborhood commercial	15'
Residential	Downtown residential	15'
_	Residential throughway	15'
-	Neighborhood residential	12'
Industrial/Mixed-Use	Industrial	10'
-	Mixed-use	15'
Special	Parkway	17'
-	Park edge (multi-use path)	25'
-	Multi-way boulevard	15'
-	Ceremonial	varies
Small	Alley	9'
-	Shared public way	n/a
-	Paseo	varies

Table E.4.2 Recommended Sidewalk Widths by Street Type

- (C) Review and approvals.
 - (i) The streetscape plan required by this section shall be submitted to the Planning Department no later than 60 days prior to any Department or Planning Commission approval action, and shall be considered for approval at the time of other project approval actions. The Planning Department may require any or all standard streetscape elements for the appropriate street type per Table 1 and the Better Streets Plan, if it finds

- that these improvements are necessary to meet the goals and objectives of the General Plan of the City and County of San Francisco. In making its determination about required streetscape and pedestrian elements, the Planning Department shall consult with other City agencies tasked with the design, permitting, use, and maintenance of the public right-of-way.
- (ii) Final approval by the affected agencies and construction of such streetscape improvements shall be completed prior to the issuance of the first Certificate of Occupancy or temporary Certificate of Occupancy for the project, unless otherwise extended by the Zoning Administrator. Should conditions, policies, or determinations by other City agencies require a change to the streetscape plan after approval of the streetscape plan but prior to commencement of construction of the streetscape improvements, the Planning Department shall have the authority to require revision to such streetscape plan. In such case, the Zoning Administrator shall extend the timeframe for completion of such improvements by an appropriate duration as necessary.
- (iii) Waiver. Any City agency tasked with the design, permitting, use, and maintenance of the public right-of-way, may waive any or all Department required improvements of the streetscape plan as described in this Subsection under that agency's jurisdiction if said agency determines that such improvement or improvements is inappropriate, interferes with utilities to an extent that makes installation financially infeasible, or would negatively affect the public welfare. Any such waiver shall be from the Director or General Manager of the affected agency, shall be in writing to the applicant and the Department, and shall specify the basis for the waiver. Waivers, if any, shall be obtained prior to commencement of construction of the streetscape improvements unless extenuating circumstances arise during the construction of said improvements. If such a waiver is granted, the Department reserves the right to impose alternative requirements that are the same as or similar to the elements in the adopted streetscape plan after consultation with the affected agency. This Subsection shall not apply to the waiver of the street tree requirement set forth in Section 138.1(c)(1).

SECTION 153. RULES FOR CALCULATION OF REQUIRED SPACES

- (a) In the calculation of off-street parking, freight loading spaces, and bicycle parking spaces required under Sections 151, 152, 152.1, 155.2, 155.3 and 155.4 of this Code, the following rules shall apply:
 - (1) In the case of mixed uses in the same structure, on the same lot or in the same development, or more than one type of activity involved in the same use, the total requirements for off-street parking and loading spaces shall be the sum of the requirements for the various uses or activities computed separately, including fractional values.
 - (2) Where an initial quantity of floor area, rooms, seats or other form of measurement is exempted from off-street parking or loading requirements, such exemption shall apply only once to the aggregate of that form of measurement. If the initial exempted quantity is exceeded, for either a structure or a lot or a development, the requirement shall apply to the entire such structure, lot or development, unless the contrary is specifically stated in this Code. In combining the requirements for use categories in mixed use buildings, all exemptions for initial quantities of square footage for the uses in question shall be disregarded, excepting the exemption for the initial quantity which is the least among all the uses in question.
 - (3) Where a structure or use is divided by a zoning district boundary line, the requirements as to quantity of off-street parking and loading spaces shall be calculated in proportion to the amount of such structure or use located in each

zoning district.

- (4) Where seats are used as the form of measurement, each 22 inches of space on benches, pews and similar seating facilities shall be considered one seat.
- (5) When the calculation of the required number of off-street parking or freight loading spaces results in a fractional number, a fraction of ½ or more shall be adjusted to the next higher whole number of spaces, and a fraction of less than ½ may be disregarded.
- (6) In C-3, MUG, MUR, MUO, UMU, and South of Market Districts, substitution of two service vehicle spaces for each required off-street freight loading space may be made, provided that a minimum of 50 percent of the required number of spaces are provided for freight loading. Where the 50 percent allowable substitution results in a fraction, the fraction shall be disregarded.

SECTION 155.2. BICYCLE PARKING: APPLICABILITY AND REQUIREMENTS FOR SPECIFIC USES

- (b) Rules for Calculating Bicycle Parking Requirements.
 - (1) Under no circumstances may total bicycle parking provided for any use, building, or lot constitute less than five percent of the automobile parking spaces for the subject building, as required by Section 5.106.4 of the 2013 California Green Building Standards Code (CalGreen) (California Title 24, Part 11), as amended from time to time.
 - (2) Calculations of bicycle parking requirements shall follow the rules of Section 153(a) of this Code.
 - (3) [INTENTIONALLY OMITTED]
 - (4) [INTENTIONALLY OMITTED]
 - (5) [INTENTIONALLY OMITTED]
 - (6) Where a project proposes to construct new Non-Residential Uses or increase the area of existing Non-Residential Uses, for which the project has not identified specific uses at the time of project approval by the Planning Department or Planning Commission, the project shall provide the amount of non-residential bicycle parking required for Retail Sales per Table 155.2.

USE	MINIMUM NUMBER OF CLASS 1 SPACES REQUIRED	MINIMUM NUMBER OF CLASS 2 SPACES REQUIRED
RESIDENTIAL USES		
Dwelling Units (on lots with 3 units or less)	No racks required. Provide secure, weather protected space meeting dimensions set in Zoning Administrator Bulletin No. 9, one per unit, easily accessible to residents and not otherwise used for automobile parking or other purposes.	None.
Dwelling Units (including SRO Units and Student Housing that are Dwelling Units)	One Class 1 space for every Dwelling Unit. For buildings containing more than 100 Dwelling Units, 100 Class 1 spaces plus one Class 1 space for every four Dwelling Units over 100. Dwelling Units that are also considered Student Housing shall provide 50 percent more spaces than would otherwise be required.	One per 20 units. Dwelling Units that are also considered Student Housing shall provide 50 percent more spaces than would otherwise be required.
Group Housing (including SRO Units and Student Housing that are Group Housing; Homeless Shelters are exempt)	One Class 1 space for every four beds. For buildings containing over 100 beds, 25 Class 1 spaces plus one Class 1 space for every five beds over 100. Group housing that is also considered Student Housing per Section 102.36 shall provide 50 percent more spaces than would otherwise be required.	Minimum two spaces. Two Class 2 spaces for every 100 beds. Group Housing that is also considered Student Housing shall provide 50 percent more spaces than would otherwise be required.
Senior Housing or Dwelling Units dedicated to persons with physical disabilities	One Class 1 space for every 10 units or beds, whichever is applicable.	Minimum two spaces. Two Class 2 spaces for every 50 units or beds, whichever is applicable.
NON-RESIDENTIAL USES		
Agricultural Uses Category		
Agricultural Uses	One Class 1 space for every 40,000 square feet.	None.
Automotive Uses Category		
Automotive Uses not listed below	One class 1 space for every 12,000 square feet of Occupied Floor Area, except not less than two Class 1 spaces for any use larger than 5,000 occupied square feet.	Minimum of two spaces. Four Class 2 spaces for any use larger than 50,000 occupied square feet.
Private Parking Garage or Lot, Public Parking Garage or Lot, Vehicle Storage Garage or Lot	None are required. However, if Class 1 spaces that can be rented on an hourly basis are provided, they may count toward the garage's requirement for Class 2 spaces.	One Class 2 space for every 20 car spaces, except in no case less than six Class 2 spaces.
Entertainment, Arts and Recreation Uses Category		
Entertainment, Arts and Recreation Uses not listed below	Five Class 1 spaces for facilities with a capacity of less than 500 guests; 10 Class 1 spaces for facilities with capacity of greater than 500 guests.	One Class 2 space for every 500 seats or for every portion of each 50 person capacity.
Arts Activities	Minimum two spaces or one Class 1 space for every 5,000 square feet of Occupied Floor Area.	Minimum two spaces or one Class 2 space for every 2,500 square feet of publicly accessible or exhibition space.

USE	MINIMUM NUMBER OF CLASS 1 SPACES REQUIRED	MINIMUM NUMBER OF CLASS 2 SPACES REQUIRED
Sports Stadium, Arena, Amphitheater, or other venue of public gathering with a capacity of greater than 2,000 people	One Class 1 space for every 20 Employees during events.	Five percent of venue capacity excluding Employees. A portion of these must be provided in Attended Facilities as described in Section 155.1(b)(3).
Industrial Uses Category		
Industrial Uses	One Class 1 space for every 12,000 square feet of Occupied Floor Area, except not less than two Class 1 spaces for any use larger than 5,000 occupied square feet.	Minimum of two spaces. Four Class 2 spaces for any use larger than 50,000 occupied square feet.
Institutional Uses Category		
Child Care Facility	Minimum two spaces or one space for every 20 children.	One Class 2 space for every 20 children.
Community Facility, Private Community Facility, Public Facility	Minimum two spaces or one Class 1 space for every 5,000 square feet of Occupied Floor Area.	Minimum two spaces or one Class 2 space for every 2,500 occupied square feet of publicly-accessible or exhibition area.
Hospital	One Class 1 space for every 15,000 square feet of Occupied Floor Area.	One Class 2 space for every 30,000 square feet of Occupied Floor Area, but no less than four located near each public pedestrian entrance.
Medical Cannabis Dispensary	One Class 1 space for every 7,500 square feet of Occupied Floor Area.	Minimum two spaces. One Class 2 space for every 2,500 square feet of Occupied Floor Area. For uses larger than 50,000 occupied gross square feet, 10 Class 2 spaces plus one Class 2 space for every additional 10,000 occupied square feet.
Philanthropic Administrative Service, Social Service or Philanthropic Facility	One Class 1 space for every 5,000 square feet of Occupied Floor Area.	Minimum two spaces for any use greater than 5,000 square feet of Occupied Floor Area, and one Class 2 space for each additional 50,000 occupied square feet.
Post-Secondary Educational Institution or Trade School	One Class 1 space for every 20,000 square feet of Occupied Floor Area.	Minimum two spaces. One Class 2 space for every 10,000 square feet of Occupied Floor Area.
Religious Facility	Five Class 1 spaces for facilities with a capacity of less than 500 guests; 10 Class 1 spaces for facilities with a capacity of greater than 500 guests.	One Class 2 space for every 500 seats or for every portion of each 50 person capacity.
Residential Care Facility	None required.	Minimum two spaces. Two Class 2 spaces for every 50 units or beds, whichever is applicable.
School	Four Class 1 spaces for every classroom.	One Class 2 space for every classroom.

USE	MINIMUM NUMBER OF CLASS 1 SPACES REQUIRED	MINIMUM NUMBER OF CLASS 2 SPACES REQUIRED
Sales and Services Use Category		
Retail Sales and Services Uses not listed below	One Class 1 space for every 7,500 square feet of Occupied Floor Area.	Minimum two spaces. One Class 2 space for every 2,500 sq. ft. of Occupied Floor Area. For uses larger than 50,000 occupied square feet, 10 Class 2 spaces plus one Class 2 space for every additional 10,000 occupied square feet.
Eating and Drinking Uses, Personal Services, Financial Services	One Class 1 space for every 7,500 square feet of Occupied Floor Area.	Minimum two spaces. One Class 2 space for every 750 square feet of Occupied Floor Area.
Health Service	One Class 1 space for every 5,000 square feet of Occupied Floor Area.	One Class 2 space for every 15,000 square feet of Occupied Floor Area, but no less than four located near each public pedestrian entrance.
Hotel, Motel	One Class 1 space for every 30 rooms.	Minimum two spaces. One Class 2 space for every 30 rooms -plus- One Class 2 space for every 5,000 square feet of Occupied Floor Area of conference, meeting or function rooms.
Mortuary	None.	None.
Retail space devoted to the handling of bulky merchandise such as motor vehicles, machinery or furniture, excluding grocery stores	Minimum two spaces. One Class 1 space for every 15,000 square feet of Occupied Floor Area.	Minimum two spaces. One Class 2 space for every 10,000 square feet of Occupied Floor Area.
Self-Storage	One Class 1 space for every 40,000 square feet.	None.
Trade Shop, Retail Greenhouse or Nursery	One Class 1 space for every 12,000 square feet of Occupied Floor Area, except not less than two Class 1 spaces for any use larger than 5,000 occupied square feet.	Minimum of two spaces. Four Class 2 spaces for any use larger than 50,000 occupied square feet.
Non-Retail Sales and Services not listed below	One Class 1 space for every 12,000 square feet of Occupied Floor Area, except not less than two Class 1 spaces for any use larger than 5,000 occupied square feet.	Minimum of two spaces. Four Class 2 spaces for any use larger than 50,000 gross square feet.
Commercial Storage, Wholesale Storage	One Class 1 space for every 40,000 square feet of Occupied Floor Area.	None.
Office	One Class 1 space for every 5,000 square feet of Occupied Floor Area.	Minimum two spaces for any Office Use greater than 5,000 square feet of Occupied Floor Area, and one Class 2 space for each additional 50,000 occupied square feet.
Utility and Infrastructure Uses Category		
Utility and Infrastructure Uses non listed below	None required.	None required.

SECTION 155.4. REQUIREMENTS FOR SHOWER FACILITIES AND LOCKERS

(c) Requirements.

USES	MINIMUM SHOWER FACILITY AND LOCKERS REQUIRED
Entertainment, Arts and Recreation Uses; Industrial Uses; Institutional Uses; Non-Retail Sales and Services Uses; Utility and Infrastructure Uses; Small Enterprise Workspace; and Trade Shop	- One shower and six clothes lockers where the Occupied Floor Area exceeds 10,000 square feet but is no greater than 20,000 square feet,
	- Two showers and 12 clothes lockers where the Occupied Floor Area exceeds 20,000 square feet but is no greater than 50,000 square feet,
	- Four showers and 24 clothes lockers are required where the Occupied Floor Area exceeds 50,000 square feet.
Retail Sales and Services Uses, except as listed above	- One shower and six clothes lockers where the Occupied Floor Area exceeds 25,000 square feet but is no greater than 50,000 square feet,
	- Two showers and 12 clothes lockers where the Occupied Floor Area exceeds 50,000 square feet.

SECTION 166. CAR SHARING

- (a) Findings. The Board hereby finds and declares as follows: One of the challenges posed by new development is the increased number of privately-owned automobiles it brings to San Francisco's congested neighborhoods. Growth in the number of privately-owned automobiles increases demands on the City's limited parking supply and often contributes to increased traffic congestion, transit delays, pollution and noise. Car-sharing can mitigate the negative impacts of new development by reducing the rate of individual car-ownership per household, the average number of vehicle miles driven per household and the total amount of automobile-generated pollution per household. Accordingly, car-sharing services should be supported through the Planning Code when a car-sharing organization can demonstrate that it reduces:
 - (1) the number of individually-owned automobiles per household;
 - (2) vehicle miles traveled per household; and
 - (3) vehicle emissions generated per household.
- (b) Definitions. For purposes of this Code, the following definitions shall apply:
 - (1) A "car-share service" is a mobility enhancement service that provides an integrated citywide network of neighborhood-based motor vehicles available only to members by reservation on an hourly basis, or in smaller intervals, and at variable rates. Car-sharing is designed to complement existing transit and bicycle transportation systems by providing a practical alternative to private motor vehicle ownership, with the goal of reducing over-dependency on individually owned motor vehicles. Car-share vehicles must be located at unstaffed, self-service locations (other than any incidental garage valet service), and generally be available for pick-up by members 24 hours per day. A car-share service shall provide automobile insurance for its members when using car-share vehicles and shall assume responsibility for maintaining car-share vehicles.
 - (2) A "certified car-share organization" is any public or private entity that provides a membership-based car-share service to the public and manages, maintains and insures motor vehicles for shared use by individual and group members. To qualify as a certified car-share organization, a car-share organization shall submit a written report prepared by an independent third party academic institution or transportation consulting firm that clearly demonstrates, based

- on a statistically significant analysis of quantitative data, that such car-sharing service has achieved two or more of the following environmental performance goals in any market where they have operated for at least two years: (A) lower household automobile ownership among members than the market area's general population; (B) lower annual vehicle miles traveled per member household than the market area's general population; (C) lower annual vehicle emissions per member household than the market area's general population; and (D) higher rates of transit usage, walking, bicycling and other nonautomobile modes of transportation usage for commute trips among members than the market area's general population. This report shall be called a Carsharing Certification Study and shall be reviewed by Planning Department staff for accuracy and made available to the public upon request. The Zoning Administrator shall only approve certification of a car-share organization if the Planning Department concludes that the Certification Study is technically accurate and clearly demonstrates that the car-share organization has achieved two or more of the above environmental performance goals during a twoyear period of operation. The Zoning Administrator shall establish specific quantifiable performance thresholds, as appropriate, for each of the three environmental performance goals set forth in this subsection.
- (3) The Planning Department shall maintain a list of certified car-share organizations that the Zoning Administrator has determined satisfy the minimum environmental performance criteria set forth in subsection 166(b)(2) above. Any car-share organization seeking to benefit from any of the provisions of this Code must be listed as a certified car-share organization.
- (4) An "off-street car-share parking space" is any parking space generally complying with the standards set forth for the district in which it is located and dedicated for current or future use by any car-share organization through a deed restriction, condition of approval or license agreement. Such deed restriction, condition of approval or license agreement must grant priority use to any certified car-share organization that can make use of the space, although such spaces may be occupied by other vehicles so long as no certified car-share organization can make use of the dedicated car-share spaces. Any off-street car-share parking space provided under this Section must be provided as an independently accessible parking space. In new parking facilities that do not

provide any independently accessible spaces other than those spaces required for disabled parking, off-street car-share parking may be provided on vehicle lifts so long as the parking space is easily accessible on a self-service basis 24 hours per day to members of the certified car-share organization. Property owners may enact reasonable security measures to ensure such 24-hour access does not jeopardize the safety and security of the larger parking facility where the car-share parking space is located so long as such security measures do not prevent practical and ready access to the off-street car-share parking spaces.

- (5) A "car-share vehicle" is a vehicle provided by a certified car-share organization for the purpose of providing a car-share-service.
- (6) A "property owner" refers to the owner of a property at the time of project approval and its successors and assigns.
- (c) Generally Permitted. Car-share spaces shall be generally permitted in the same manner as residential accessory parking. Any residential or commercial parking space may be voluntarily converted to a car-share space.
- (d) Requirements for Provision of Car-Share Parking Spaces.
 - (1) Amount of Required Spaces. In newly constructed buildings containing residential uses or existing buildings being converted to residential uses, if parking is provided, car-share parking spaces shall be provided in the amount specified in Table 166. In newly constructed buildings containing parking for non-residential uses, including non-accessory parking in a garage or lot, carshare parking spaces shall be provided in the amount specified in Table 166.

NUMBER OF RESIDENTIAL UNITS	NUMBER OF REQUIRED CAR-SHARE PARK- ING SPACES
0 - 49	0
50 - 200	1
201 or more	2, plus 1 for every 200 dwelling units over 200
NUMBER OF PARKING SPACES PROVIDED FOR NON-RESIDENTIAL USES OR IN A NON-ACCESSORY PARKING FACILITY	NUMBER OF REQUIRED CAR-SHARE PARK- ING SPACES
FOR NON-RESIDENTIAL USES OR IN A	
FOR NON-RESIDENTIAL USES OR IN A NON-ACCESSORY PARKING FACILITY	

Table 166: REQUIRED CAR-SHARE PARKING SPACES

- (2) Availability of Car-Share Spaces. The required car-share spaces shall be made available, at no cost, to a certified car-share organization for purposes of providing car-share services for its car-share service subscribers. At the election of the property owner, the car-share spaces may be provided
 - (A) on the building site, or
 - (B) on another off-street site within 800 feet of the building site.
- (3) Off-Street Spaces. If the car-share space or spaces are located on the building site or another off-street site:
 - (A) The parking areas of the building shall be designed in a manner that will make the car-share parking spaces accessible to non-resident subscribers from outside the building as well as building residents;
 - (B) Prior to Planning Department approval of the first building or site permit for a building subject to the car-share requirement, a Notice of Special Restriction on the property shall be recorded indicating the nature of requirements of this Section and identifying the minimum number and location of the required car-share parking spaces. The form of the notice and the location or locations of the car-share parking spaces shall be approved by the Planning Department;
 - (C) All required car-share parking spaces shall be constructed and provided at no cost concurrently with the construction and sale of units; and
 - (D) if it is demonstrated to the satisfaction of the Planning Department that no certified car-share organization can make use of the dedicated car-share parking spaces, the spaces may be occupied by non-car-share vehicles; provided, however, that upon ninety (90) days of advance written notice to the property owner from a certified car-sharing organization, the property owner shall terminate any non car-sharing leases for such spaces and shall make the spaces available to the car-share organization for its use of such spaces.
- (e) Substitution for Required Parking. Provision of a required car-share parking space shall satisfy or may substitute for any required residential parking; however,

- such space shall not be counted against the maximum number of parking spaces allowed by this Code as a principal use, an accessory use, or a conditional use.
- (f) List of Car-Share Projects. The Planning Department shall maintain a publicly-accessible list, updated quarterly, of all projects approved with required off-street car-share parking spaces. The list shall contain the Assessor's Block and Lot number, address, number of required off-street car-share parking spaces, project sponsor or property owner contact information and other pertinent information as determined by the Zoning Administrator.
- (g) Optional Car-Share Spaces.
 - (1) Amount of Optional Spaces. In addition to any permitted or required parking that may apply to the project, the property owner may elect to provide additional car-share parking spaces in the maximum amount specified in Table 166A; provided, however, that the optional car-share parking spaces authorized by this subsection (g) are not permitted for a project that receives a Conditional Use authorization to increase parking. Additional car-share parking spaces shall be allowed beyond the maximum amount specified in Table 166A, to the extent needed, when such additional car-share parking spaces are part of a Development Project's compliance with the Transportation Demand Management Program set forth in Section 169 of the Planning Code.

NUMBER OF RESIDENTIAL UNITS	MAXIMUM NUMBER OF OPTIONAL CAR- SHARE PARKING SPACES
10- 24	2
25 - 49	3
50 or more	5
AMOUNT OF SQUARE FOOTAGE FOR NON-RESIDENTIAL USES	MAXIMUM NUMBER OF OPTIONAL CAR- SHARE PARKING SPACES
NON-RESIDENTIAL USES	SHARE PARKING SPACES

Table 166A: OPTIONAL CAR-SHARE PARKING SPACES

The optional car-share spaces shall not be counted against the maximum number of parking spaces allowed by this Code as a principal use, an accessory use, or a conditional use.

- (2) Requirements for Optional Car-Share Spaces. All car-share spaces are subject to the following:
 - (A) They shall meet the provisions of this Section 166.
 - (B) The car-share parking spaces shall be deed-restricted and dedicated for car-sharing, and must be offered and maintained in perpetuity.
 - (C) At project entitlement, the property owner must submit a letter of intent from a certified car-share organization that articulates the car-share organization's intent to occupy the requested car-share spaces under this Subsection (g).
 - (D) Use of the car-share vehicles shall not be limited to residents of the building.
 - (E) If an additional car-share space is built, and a certified car-share organization chooses not to place vehicles in that space, the owner of the project may not sell, rent, or otherwise earn fees on the space but may use it for (i) bicycle parking, or (ii) permitted storage and other permitted uses but not for parking of any motorized vehicle; provided, however, that upon ninety (90) days of advance written notice to the property owner from a certified car-sharing organization, the property owner shall terminate any non car-sharing use for such space and shall make the space available to the car-share organization for its use of such space.
 - (F) A sign shall be placed above or next to each car-share parking space stating that the parking space is for car-sharing and cannot be used for private automobile parking. The sign shall meet the Department's design specifications and shall include the name and contact information of a person to call for enforcement of this requirement and such other information as the Department requires. An informational plaque shall also be placed on the outside of the building location, which shall meet the design, location and information requirements established by the

Department.

(3) Existing Car-Share Spaces Located on Gas Stations Sites and Surface Parking Lots. If the number of car-share spaces located on a gas station, surface parking lot, or other similar site for at least one year exceeds the total number of required and/or optional car-share parking spaces as provided for under Table 166 and Table 166A, the developer may retain those car-share spaces if the site is redeveloped without reducing the permitted levels of private parking; provided, however, that a property owner cannot seek additional optional car-share parking spaces per Table 166A.

SEC. 181. NONCONFORMING USES: ENLARGEMENTS, ALTERATIONS AND RECONSTRUCTION.

The following provisions shall apply to nonconforming uses with respect to enlargements, alterations and reconstruction:

- (a) Increases in Nonconformity. A nonconforming use, and any structure occupied by such use, shall not be enlarged, intensified, extended, or moved to another location, with the exception of the construction of a mezzanine within a Live/Work Unit and expansion of Dwelling Units in PDR Districts, unless the result will be elimination of the nonconforming use, except as provided below and in Section 186.1 of this Code. A nonconforming use shall not be extended to occupy additional space in a structure, or additional land outside a structure, or space in another structure, or to displace any other use, except as provided in Sections 182 and 186.1 of this Code.
- (b) Permitted Alterations. A structure occupied by a nonconforming use shall not be constructed, reconstructed or altered, unless the result will be elimination of the nonconforming use, except as provided in Section 186.1 of this Code and in Subsections (a) above and (d), (e), (f), (g), (h) and (i) below, and except as follows:
- (1) Ordinary maintenance and minor repairs shall be permitted where necessary to keep the structure in sound condition, as well as minor alterations, where such work is limited to replacement of existing materials with similar materials placed in a similar manner.
- (2) Minor alterations shall be permitted where ordered by an appropriate public official to correct immediate hazards to health or safety, or to carry out newly enacted retroactive requirements essential to health or safety.
- (3) Alterations otherwise allowed by this Code shall be permitted for any portion of the structure that will not thereafter be occupied by the nonconforming use, provided the nonconforming use is not enlarged, intensified, extended, or moved to another location.
- (4) All other alterations of a structural nature shall be permitted only to the extent that the aggregate total cost of such other structural alterations, as estimated by the Department of Building Inspection, is less than $\frac{1}{2}$ of the assessed valuation of the improvements prior to the first such alteration, except that structural alterations required to reinforce the structure to meet the

standards for seismic loads and forces of the Building Code shall be permitted without regard to cost.

- (c) Dwellings Nonconforming as to Density. N/A
- (d) Structures Damaged or Destroyed by Calamity. Notwithstanding the foregoing provisions of this Section 181, a structure occupied by a nonconforming use that is damaged or destroyed by fire, or other calamity, or by Act of God, or by the public enemy, may be restored to its former condition and use; provided that such restoration is permitted by the Building Code, and is started within eighteen months and diligently prosecuted to completion. The age of such a structure for the purposes of Sections 184 and 185 shall nevertheless be computed from the date of the original construction of the structure. Except as provided in Subsection (e) below, no structure occupied by a nonconforming use that is voluntarily razed or required by law to be razed by the owner thereof may thereafter be restored except in full conformity with the use limitations of this Code.

For purposes of this Subsection (d), "started within eighteen months" shall mean that within eighteen months of the fire or other calamity or Act of God, the structure's owner shall have filed a building permit application to restore the structure to its former condition and use.

- (e) Unreinforced Masonry Buildings. In order that major life safety hazards in structures may be eliminated as expeditiously as possible, a structure containing nonconforming uses and constructed of unreinforced masonry that is inconsistent with the requirements of the UMB Seismic Retrofit Ordinance, Ordinance No. 227-92, may be demolished and reconstructed with the same nonconforming use or a use as permitted by Planning Code Section 182; provided that:
- (1) there is no increase in any nonconformity, or any new nonconformity, with respect to the use limitations of this Code;
- (2) the current requirements of the Building Code, the Housing Code and other applicable portions of the Municipal Code are met; and
- (3) such restoration or reconstruction is started within one year after razing or other demolition work on the structure and diligently prosecuted to completion.

- (f) Nighttime Entertainment Uses in Certain Mixed-Use Districts. N/A
- (g) Automotive Sales and Service Signs in the Automotive Special Use District. N/A
- (h) Dwellings in PDR and M-2 Districts. N/A
- (i) Nonconforming Non-Residential Uses in the Eastern Neighborhoods Mixed Use, PDR-1-D, and PDR-1-G Districts. N/A

SEC. 182. NONCONFORMING USES: CHANGES OF USE.

The following provisions shall apply to nonconforming uses with respect to changes of use:

- (a) A nonconforming use shall not be changed or modified so as to increase the degree of nonconformity under the use limitations of this Code, with respect to the type of use or its intensity except as provided in Section 181 for Nighttime Entertainment uses within the RSD, MUG, MUR, or SLR Districts. The degree of nonconformity shall be deemed to be increased if the new or modified use is less widely permitted by the use districts of the City than the nonconforming use existing immediately prior thereto. For purposes of this Section, intensification of a Formula Retail use as defined in Section 178(c) is determined to be a change or modification that increases the degree of nonconformity of the use.
- (b) Except as limited in this Subsection, a nonconforming use may be reduced in size, extent or intensity, or changed to a use that is more widely permitted by the use districts of the City than the existing use, subject to the other applicable provisions of this Code. Except as otherwise provided herein, the new use shall still be classified as a nonconforming use.
- (1) Nonconforming Commercial and Industrial uses in a Residential or Residential Enclave District shall be subject to the requirements of Section 186.
- (2) A nonconforming use in a Neighborhood Commercial District may be changed to another use as provided in Subsections (c) and (d) below or as provided in Section 186.1 of this Code.
- (3) A nonconforming use in any South of Market Mixed Use District may not be changed to an Office, Retail, Bar, Restaurant, Nighttime Entertainment, Adult Entertainment, Hotel, Motel, inn, hostel, or Movie Theater use in any district where such use is otherwise not permitted or conditional, except as provided in Subsection (f) below.
- (c) A nonconforming use may be changed to a use listed as a conditional use for the district in which the property is located, only upon approval of a Conditional Use application pursuant to the provisions of Article 3 of this Code, and the new use may thereafter be continued as a permitted conditional use,

- subject to the limitation of Section 178(b) of this Code.
- (d) A nonconforming use may be changed to a use listed as a principal use for the district in which the property is located, subject to the other applicable provisions of this Code, and the new use may thereafter be continued as a permitted principal use.
- (e) A nonconforming use may be converted to a Dwelling Unit and to two or more Dwelling Units with Conditional Use authorization, in a district where such use is principally permitted, without regard to the requirements of this Code with respect to residential density or required off-street parking, and the Zoning Administrator may provide relief from certain other standards specified in Section 307(h) through the procedures of that Section, provided the nonconforming use is eliminated by such conversion, provided further that the structure is not enlarged, extended or moved to another location, and provided further that the requirements of the Building Code, the Housing Code and other applicable portions of the Municipal Code are met.
- (f) Once a nonconforming use has been changed to a principal or conditional use permitted in the district in which the property is located, or brought closer in any other manner to conformity with the use limitations of this Code, the use of the property may not thereafter be returned to its former nonconforming status, except that within any South of Market Mixed Use District, any area occupied by a nonconforming Office use that is changed to an arts, home and/or business service use falling within the definition of an Arts Activity in Section 102 or zoning categories 816.42 through 816.47 or a wholesale, storage, or light manufacturing use falling within zoning categories 816.64 through 816.67 shall be allowed to return to its former nonconforming Office use. Upon restoration of a previous nonconforming use as permitted above, any modification, enlargement, extension, or change of use, from circumstances that last lawfully existed prior to the change from office use, shall be subject to the provisions of this Article, and the restored nonconforming use shall be considered to have existed continuously since its original establishment, prior to the change to Office use, for purposes of this Article.
- (g) If a nonconforming use has been wrongfully changed to another use in violation of any of the foregoing provisions, and the violation is not immediately

- corrected when required by the Zoning Administrator, the wrongful change shall be deemed to be a discontinuance or abandonment of the nonconforming use under Section 183 of this Code.
- (h) If a nonconforming use is a Formula Retail use in a District that prohibits Formula Retail uses, the Formula Retail use is deemed abandoned if it is discontinued for a period of 18 months or more, or otherwise abandoned. The Formula Retail use shall not be restored.
- (1) Change of one nonconforming Formula Retail use to another Formula Retail use that is determined to not be an enlargement or intensification of use, as defined in Subsection 178(c), is subject to the Commission's adopted Performance-Based Design Guidelines tor Formula Retail, which may be applied and approved administratively by the Planning Department. Non-conformance with the Performance-Based Design Guidelines tor Formula Retail as required by the Department may result in termination of the nonconforming Formula Retail use.
- (2) Change of one nonconforming Formula Retail use to another Formula Retail use that is determined to be an enlargement or intensification of use, as defined in Subsection 178(c), is not permitted.

SEC. 183. NONCONFORMING USES: DISCONTINUANCE AND ABANDONMENT.

- (a) Discontinuance and Abandonment of a Nonconforming Use, Generally. Whenever a nonconforming use has been changed to a conforming use, or discontinued for a continuous period of three years, or whenever there is otherwise evident a clear intent on the part of the owner to abandon a nonconforming use, such use shall not after being so changed, discontinued, or abandoned be reestablished, and the use of the property thereafter shall be in conformity with the use limitations of this Code for the district in which the property is located. Where no enclosed building is involved, discontinuance of a nonconforming use for a period of six months shall constitute abandonment. Where a Massage Establishment is nonconforming for the reason that it is within 1,000 feet of another such establishment or because it is no longer permitted within the district, discontinuance for a continuous period of three months or change to a conforming use shall constitute abandonment.
- (b) Discontinuance or Abandonment of a Nonconforming Formula Retail Use. Notwithstanding subsection (a) of this Section, when a nonconforming Formula Retail use has been changed to a conforming use or discontinued for a period of 18 months, or whenever there is otherwise evident a clear intent on the part of the owner to abandon a nonconforming Formula Retail use, such use shall not be reestablished after being so changed, discontinued or abandoned, and the use of the property thereafter shall be in conformity with the use limitations of this Code for the district in which the property is located.
- (c) Discontinuance or Abandonment of Self-Storage Use Due to City and County Occupancy. Adoption of the Western South of Market Area Plan resulted in certain land uses, including Self-Storage, that were previously permitted no longer being permitted. The purpose of this subsection 183(c) is to establish a process by which the owner of property with a Self-Storage use that was established and is operating without the benefit of a required change of use permit may seek and obtain the required permit, lease the property to the City and County of San Francisco for a public safety-related purpose, and re-establish a legal nonconforming Self-Storage use after the City vacates the property.
- (1) Legitimization of Existing Self-Storage Use; Notice and Discretionary Review of the Building Permit. In the case of a Self-Storage use that was

- established and has been operating without the benefit of a required change of use permit, the property owner may seek and be granted such permit notwithstanding the limitation of No. 846.48 in Table 846 of this Code, the permit application shall not be subject to the notification requirements of Section 312 or other notification requirements of this Code, and no requests for discretionary review of the building permit shall be accepted by the Planning Department or heard by the Planning Commission provided that:
- (A) the permit application is filed for a property located within (i) the Service/Arts/Light Industrial Zoning District and (ii) 1,000 feet of the South Of Market Special Hall Of Justice Legal Services District; and
- (B) the Zoning Administrator has determined that the existing Self-Storage use (i) has been regularly operating or functioning prior to the effective date of this subsection 183(c) and (ii) is not accessory to any other use; and
- (C) prior to issuance of the building permit to legitimize the existing Self-Storage use, the property owner pays the Transit Impact Development Fee required by Planning Code Section 411et seq. in the amount that was in effect and would have been due at the time of the original establishment of the existing Self-Storage use; and
- (D) the building permit to legitimize the existing Self-Storage use is issued prior to the earlier of (i) commencement of occupancy by the City for a public-safety related purpose or (ii) issuance of a building permit to establish the public safety-related use.

If the property owner has not applied for a building permit to legitimize an existing Self-Storage use and the permit is not issued as set forth in this subsection (c)(1), the Self-Storage use shall be deemed irrevocably abandoned and may not be re-established.

(2) Change of Use from a Self-Storage Use to Public Use; Notice and Discretionary Review of the Building Permit. Any building permit that is required for the City's occupancy of the property for a public-safety related purpose classified as a Public Use under Section 890.80of this Code shall not be subject to the notification requirements of Section 312 or other notification requirements of this Code, and no requests for discretionary review of the

building permit shall be accepted by the Planning Department or heard by the Planning Commission.

- (3) Re-establishment of Self-Storage Use; Notice and Discretionary Review of the Building Permit. An existing nonconforming Self-Storage use or a Self-Storage use that is legitimized pursuant to subsection (c)(1), that in either case is changed to a public safety-related use due solely to occupancy by the City and County of San Francisco acting through any of its departments, shall not be considered discontinued or abandoned for purposes of subsection (a) above or any other provision of this Code and the property owner may resume use of the premises as a Self-Storage use after the City vacates the property, provided that:
- (A) the City's occupancy was for a public safety-related purpose classified as a Public Use under Section 890.80 of the Planning Code;
- (B) if the pre-existing Self-Storage use had been established and was operating without the required change of use permit, the property owner applied for and was granted a building permit to legitimize the pre-existing Self-Storage Use pursuant to subsection (c)(1); and
- (C) the property owner resumes the pre-existing Self-Storage use within two years from the later of (i) the date the City vacated the property or (ii) the date the City's lease for the property was terminated.

The property owner shall apply for and obtain any permits required to resume the pre-existing Self-Storage use within one year from the date the City vacates the property. If the application for a permit is limited to re-establishment of the pre-existing Self-Storage use, the application shall not be subject to the notification requirements of Section 312 or other notification requirements of this Code, and no requests for discretionary review of the building permit shall be accepted by the Planning Department or heard by the Planning Commission.

(4) Extensions of Time.

(A) If a permit to resume the pre-existing Self-Storage use is issued but delayed due to an action before the Board of Appeals or other City agency, or a case in any court of competent jurisdiction, the time to resume such pre-existing use shall be extended by the amount of time final action on the permit

was delayed.

- (B) The Zoning Administrator may grant one or more extensions of the time within which the pre-existing Self-Storage use must be resumed if the owner or owners of the property have made a good-faith effort to comply but are unable to do so for reasons that are not within their control.
- (5) Notice to Property Owner. The Planning Department shall provide written notice to the owner of record of any property that is within the scope of Section 183(c) of any proposed ordinance to substantively amend this Section 183(c) prior to a hearing thereon by the Planning Commission, provided that the property owner has sent a written request for said notice to the Zoning Administrator.

SEC. 188. NONCOMPLYING STRUCTURES: ENLARGEMENTS, ALTERATIONS AND RECONSTRUCTION.

- (a) Within the limitations of this Article 1.7, and especially Sections 172 and 180 hereof, a noncomplying structure as defined in Section 180may be enlarged, altered or relocated, or undergo a change or intensification of use in conformity with the use limitations of this Code, provided that with respect to such structure there is no increase in any discrepancy, or any new discrepancy, at any level of the structure, between existing conditions on the lot and the required standards for new construction set forth in this Code, and provided the remaining requirements of this Code are met.
- (b) A noncomplying structure that is damaged or destroyed by fire, or other calamity, or by Act of God, or by the public enemy, may be restored to its former condition; provided that such restoration is permitted by the Building Code, and is started within eighteen months and diligently prosecuted to completion. Except as provided in Subsection (c) below, no noncomplying structure that is voluntarily razed or required by law to be razed by the owner thereof may thereafter be restored except in full conformity with the requirements of this Code.

For purposes of this Subsection (b), "started within eighteen months" shall mean that within eighteen months of the fire or other calamity or Act of God, the structure's owner shall have filed a building permit application to restore the structure to its former condition and use.

- (c) In order that major life safety hazards in noncomplying structures may be eliminated as expeditiously as possible, a noncomplying structure constructed of unreinforced masonry that is inconsistent with the requirements of the UMB Seismic Retrofit Ordinance, Ordinance No. 227-92, may be demolished and reconstructed to the same level of noncompliance; provided that:
- (1) The current requirements of the Building, Housing and Fire Codes and, as applicable, Planning Code are met, provided that the Zoning Administrator may, and is hereby empowered to, permit minor modifications to Planning Code requirements (which may include permitting an increase in the building envelope or a reduction in the number of parking spaces) to the extent necessary and required to bring the replacement building up to such applicable Code requirements and to allow replacement of the demolished building with a building which contains a comparable amount of square footage or the same

- number of residential units as that of the demolished building. The Zoning Administrator shall provide a written determination regarding such permitted Planning Code modifications; and
- (2) Such restoration or reconstruction is started within one year after razing or other demolition work on the structure and diligently prosecuted to completion.
- (d) Notwithstanding Subsection (a) of this Section, a noncomplying structure as defined in Section 180, may add nonusable space. "Nonusable space" is space not used for living, sleeping, eating, cooking or working. Public corridors, mechanical space, fire stairs and similar areas, are nonusable space. The enlargement must:
- (1) Facilitate the adaptive reuse or the rehabilitation of a landmark site or contributory structure within a Historic District designated under Article 10 of this Code or a significant structure or contributory structure within a Conservation District designated under Article 11 of this Code; and
- (A) Be necessary to comply with Building Code, Fire Code or Planning Code requirements; or
- (B) Enhance the life safety aspects of the building and/or mechanical, environmental control systems; or
- (2) Be located within a C-3 District, and:
- (A) Be necessary to comply with Building Code, Fire Code or Planning Code requirements; or
 - (B) Enhance aesthetic qualities and/or character; or
- (C) Enhance the life safety aspects of the building and/or mechanical, environmental control systems; or
- (D) Accommodate rooftop features exempted from height limits under Section 260(b) or as provided for under Sections 270, 271 or 272 of this Code.
- (3) Application for enlargement of a non-complying structure under Subsection (d)(1) shall be considered as part of an application for a Certificate of Appropriateness under Article 10 or a Permit to Alter under Article 11 of

this Code. Any application to enlarge a noncomplying structure under Article 11 shall be considered as a major alteration under Section 1111 of the Planning Code. Application to alter a noncomplying structure not designated an Article 11 significant or contributory building under Subsection (d)(2) shall be considered under the provisions of Section 309(b) of this Code. These applications shall be subject to the following additional criteria:

- (A) That the enlargement promote the health, safety and welfare of the public; and
- (B) That the enlargement not cause significant shadows or wind impacts on public sidewalks and parks; and
- (C) That the structure provides an appropriate transition to adjacent properties, as necessary; and
- (D) That the interior block open space formed by the rear yards of abutting properties will not be adversely affected; and
- (E) That the access of light and air to abutting properties will not be significantly affected; and
 - (F) That public view corridors not be significantly affected; and
- (4) The City Planning Commission, subject to the same application procedures of Section 188(d)(3) above, may grant an exception to the Planning Code requirements rather than expansion of the structure to accommodate the Planning Code requirements. The exception of the Planning Code requirement shall be subject to the criteria below:
- (A) That the exception promote the health, safety and welfare of the public; and
- (B) That the exception result in an increased benefit to the public and the adjacent properties over the increase in nonconformance; and
- (C) That the exception not be detrimental to either the occupants of the proposed project or to the neighborhood.
- (e) Historic Movie Theater Marquees and Projecting Signs. Notwithstanding Subsection (a) of this Section, and in order that certain character-defining

architectural elements of Qualified Movie Theaters be preserved and enhanced, a noncomplying Historic Movie Theater Projecting Sign, as defined in Section 602, and/or a noncomplying Historic Movie Theater Marquee, as defined in Section 602, may be preserved, rehabilitated, or restored. A noncomplying Historic Movie Theater Projecting Sign or a noncomplying Historic Movie Theater Marquee removed from a Qualified Movie Theater prior to or in absence of an application for replacement may be reconstructed.

- (1) For the purposes of this Section, "Qualified Movie Theater" shall mean a building that: (A) is currently or has been used as a Movie Theater; and (B) is listed on or eligible for listing on the National Register of Historic Places or the California Register of Historical Resources, designated a City Landmark or a contributor to a City Landmark District under Article 10, or designated as a Significant or Contributory Building under Article 11.
- (2) Any preservation, rehabilitation, restoration, or reconstruction permitted under this Section shall be in strict conformity with the overall design, scale, and character of the existing or previously existing Historic Movie Theater Sign or Historic Movie Theater Marquee and:
- (A) For a Qualified Movie Theater that retains its Historic Movie Theater Projecting Sign and/or Historic Movie Theater Marquee, the signage features shall be limited to the following:
- (i) On a Historic Movie Theater Projecting Sign, the historic name associated with a previous theater occupant;
- (ii) On a Historic Movie Theater Marquee, the historic name associated with a previous theater occupant and, where applicable, on the signboard, other information that is an Identifying Sign, as defined in Section 602, provided such information shall be contained within the signboard, shall not consist of any logos, and shall be in the character of lettering historically found on Movie Theater signboards in terms of size, font, and detail.
- (B) For a Qualified Movie Theater where the Historic Movie Theater Projecting Sign and/or Historic Movie Theater Marquee has been removed and is proposed to be reconstructed, the overall design and signage features shall be limited to the following:

- (i) On a Historic Movie Theater Projecting Sign, the historic name associated with a previous theater occupant;
- (ii) On a Historic Movie Theater Marquee, the historic name associated with a previous theater occupant and, where applicable, on the signboard, other information that is an Identifying Sign, as defined in Section 602, provided such information shall be contained within the signboard, shall not consist of any logos, and shall be in the character of lettering historically found on Movie Theater signboards in terms of size, font, and detail.
- (C) Any application to reconstruct shall include evidence of the dimensions, scale, materials, placement, and features of the previously existing Historic Movie Theater Projecting Sign and/or Historic Movie Theater Marquee, as well as any other information required by the Zoning Administrator.
- (D) General advertising signs shall not be permitted on either a Historic Movie Theater Projecting Sign or a Historic Movie Theater Marquee.
- (f) Notwithstanding Subsection (a) of this Section 188, a secondary structure that is noncomplying with respect to the maximum floor area ratio limit may be removed, in whole or in part, and reconstructed pursuant to the criteria below. For purposes of this Subsection (f), a secondary structure means a structure located on a lot with two or more structures that has no more than one-quarter of the gross floor area of the primary structure on the lot.
- (1) The proposed removal and reconstruction shall:
 - (A) Be located within a C-3-R District on Block 295, Lot 16;
 - (B) Promote and enhance the C-3-R District as a retail destination;
- (C) Result in an increased benefit to the public and the adjacent properties;
 - (D) Enhance the aesthetic qualities and/or character of the lot;
- (E) Result in a net decrease of gross floor area of all structures on the subject property:
- (F) Result in a structure that more closely conforms to the floor area ratio limit;

- (G) Not result in an adverse impact to a historic resource;
- (H) Not cause significant shadows or wind impacts on public sidewalks or parks;
 - (I) Not obstruct significant public view corridors; and
 - (J) Not significantly impair light and air to abutting properties.
- (2) An application for removal and reconstruction of a non-complying secondary structure shall be considered under the provisions of Section 309(b) of this Code.
- (g) Notwithstanding subsection (a) of this Section 188, Terrace Infill, defined as floor area or building volume located within an existing terrace that is already framed by no less than one wall, may be permitted to be enclosed on a noncomplying structure, as defined in Planning Code Section 180, notwithstanding otherwise applicable height, floor area ratio and bulk limits. where the noncomplying structure is designated as a Significant Building under Article 11 of this Code and is located on Assessor's Block 0316. An application for Terrace Infill shall be considered a Major Alteration under Section 1111.1 of this Code and shall be subject to the applicable provisions of Article 11 of this Code, including but not limited to the requirement to apply for and procure a Permit to Alter. As part of the Historic Preservation Commission's consideration of such application, in addition to other requirements set forth in this Code, the facts presented must establish that the Terrace Infill (1) would not be visible from the primary building frontage, and (2) would not exceed 1,500 net new square feet per building. Unless the Board of Supervisors adopts an ordinance extending the term of this Subsection 188(g), it shall expire by operation of law on January 31, 2019. After that date, the City Attorney shall cause this Subsection 188(g) to be removed from the Planning Code.

SECTION 205.1. TEMPORARY USES: SIXTY-DAY LIMIT

A temporary use may be authorized for a period not to exceed 60 days for any of the following uses:

- (a) Neighborhood carnival, exhibition, celebration or festival sponsored by an organized group of residents in the vicinity or, in Neighborhood Commercial, Mixed Use, PDR, C, or M Districts, sponsored by property owners or businesses in the vicinity;
- (b) Booth for charitable, patriotic or welfare purposes;
- (c) Open air sale of agriculturally produced seasonal decorations, including, but not necessarily limited to, Christmas trees and Halloween pumpkins

SECTION 205.2. TEMPORARY USES: ONE- OR TWO-YEAR LIMIT

A temporary use may be authorized for a period not to exceed two years for any of the following uses:

- (a) Temporary structures and uses incidental to the construction of a group of buildings on the same or adjacent premises;
- (b) Rental or sales office incidental to a new residential development, not including the conduct of a general real estate business, provided that it be located within the development, and in a temporary structure or part of a dwelling. A temporary use may be authorized for a period not to exceed one year (including any extensions) for the following year.
- (c) In any M-1 or M-2 District, an Automobile Wrecking use as defined in Section 102 of this Code, provided if the operation would be a conditional use in the district in question, that the Zoning Administrator determines the operation will meet within 90 days of commencing operation all conditions applicable to such use in that district.
- (d) Temporary Wireless Telecommunications Services (WTS) Facilities for a period of up to one year if the following requirements are met:
 - (1) the Zoning Administrator determines that the Temporary WTS Facility shall be sited and constructed so as to:
 - (A) avoid proximity to residential dwellings to the maximum extent feasible;
 - (B) comply with the provisions of Article 29 of the Police Code;
 - (C) be no taller than needed;
 - (D) be screened to the maximum extent feasible: and
 - (E) be erected for no longer than reasonably required.
 - (2) Permits in excess of 90 days for Temporary WTS Facilities operated for commercial purposes shall be subject to Section 311 and 312 of this Code, where applicable.
 - (3) The Planning Department may require, where appropriate, notices along street frontages abutting the location of the Temporary WTS Facility indicating the nature of the facility and the duration of the permit.

(e) Temporary Cannabis Retail Use for a period of up to one year, as provided by Section 191, to be authorized no earlier than January 1, 2018 and to expire on January 1, 2019.

SECTION 205.3. TEMPORARY USES: TWENTY-FOUR-HOUR LIMIT

Within the PDR, C, M, Neighborhood Commercial, or Mixed Use Districts, a temporary use may be authorized for a period not to exceed 24 hours per event once a month for up to 12 events per year per premises for any of the following uses:

- (a) A performance, exhibition, dance, celebration or festival requiring a liquor license, entertainment police permit and/or other City permit when sponsored by an organized group of residents and/or business operators in the neighborhood; or
- (b) A performance, dance or party requiring a liquor license, entertainment and/ or other City permit, an art exhibit, or other similar exhibition in each case if sponsored by a residential or commercial tenant or group of tenants or owneroccupants of the property or structure in which the temporary use is authorized.

When multiple events are proposed within the allowable annual time limit and City permits are to be issued to a particular applicant and premises, only one permit need be granted per annual time period.

SECTION 205.4. TEMPORARY USES: INTERMITTENT ACTIVITIES

An intermittent activity is an outdoor use which, while occasional, occurs with some routine or regularity. Intermittent activities include, but are not limited to, the following uses: mobile food facilities, farmers markets, and open-air craft markets. Such uses typically require additional authorization(s) from other City Departments. An intermittent activity may be authorized as a temporary use for a period not to exceed one year.

- (a) In all Districts other than RH, RM, RED, and RTO Districts an intermittent activity is permissible if it satisfies all of the following conditions:
 - (1) It shall not be located within a Building as defined in Section 102 of this Code.
 - (2) It shall not be located on the property for more than either: (i) 6 calendar days for longer than 12 hours per day in any 7-day period; or (ii) 3 calendar days for longer than 24 hours per day in any 7-day period. At the time of application, the applicant shall designate in writing which of the foregoing options shall apply to the activity. No changes shall be made during the authorization period without first filing a new application.
 - (A) The time periods referenced in Subsection (a)(2) each constitute complete calendar days and apply without regard to whether the activity is open to the public or whether the activity is located on the subject property for consecutive days.
 - (B) Days of unused authorization cannot be stored or credited, and any portion of a day that the intermittent activity is located at the subject property shall count toward the 12-hour or the 24-hour limit of Subsection (a)(2).
 - (C) This Subsection (a)(2) shall not apply to any Mobile Food Facility located within a Public (P) District that together with any directly adjoining P District(s) contains more than one acre.
 - (3) It shall be open for business only during the hours of operation permitted as a principal use for the District in which it is located, if any such hourly limits exist.
 - (4) If located in a District that is subject to any of the neighborhood notification requirements as set forth in Section 312 of this Code, notification pursuant to Section 312 shall be required as follows:

- (A) Notification shall be required if the vending space, as defined below, would exceed 300 square feet.
- (B) Notification shall be required if any portion of the vending space would be located within 50 feet of an RH, RM, RED, or RTO District. Distances to RH, RM, RED, and RTO Districts shall be measured from the extreme perimeter of any vending space to the nearest property line of any parcel which is partially or wholly so zoned.
- (C) For purposes of this Section, "Vending Space" shall be defined as the entire area within a single rectangular perimeter formed by extending lines around the extreme limits of all carts, vehicles, tables, chairs, or other equipment associated with all intermittent activities located on the parcel.
- (D) Notwithstanding Subsections (4)(A) and (B) above, and in order to eliminate redundant notification, notification shall not be required for the resumption of an intermittent activity or the extension of time for an intermittent activity when all of the following criteria are met: (i) an intermittent activity is currently authorized on the property or has been authorized on the property within the 12 months immediately preceding the filing of an application for resumption or extension; (ii) the existing or recent intermittent activity lawfully exceeds or exceeded the thresholds of Subsections (4)(A) and/or (B), above, and was the subject of neighborhood notice under Section 312 at the time of its establishment; and (iii) the intermittent activity would not further exceed the thresholds of Subsections (4)(A) and/or (B), above.
- (b) An intermittent activity is allowed in a RH, RM, RED, and RTO District only if it: (1) satisfies all the conditions set forth in Subsection (a); and (2) is located on a parcel that contains or is part of a Hospital, as defined in Section 102 or a Post-Secondary Educational Institution, as defined in Section 102. An intermittent activity authorized under this Subsection shall not operate between the hours of 10:00 p.m. to 7:00 a.m.

SECTION 260. HEIGHT LIMITS: MEASUREMENT

- (b) Exemptions. In addition to other height exceptions permitted by this Code, the features listed in this subsection (b) shall be exempt from the height limits established by this Code, in an amount up to but not exceeding that which is specified.
 - (1) The following features shall be exempt provided the limitations indicated for each are observed; and provided further that the sum of the horizontal areas of all features listed in this subsection (b)(1) shall not exceed 20% of the horizontal area of the roof above which they are situated, or, in C-3 Districts and in the Rincon Hill Downtown Residential District, where the top of the building has been separated into a number of stepped elements to reduce the bulk of the upper tower, of the total of all roof areas of the upper towers; and provided further that in any R, RC-3, or RC-4 District the sum of the horizontal areas of all such features located within the first 10 feet of depth of the building, as measured from the front wall of the building, shall not exceed 20% of the horizontal area of the roof in such first 10 feet of depth.

As an alternative, the sum of the horizontal areas of all features listed in this subsection (b)(1) may be equal to but not exceed 20% of the horizontal area permitted for buildings and structures under any bulk limitations in Section 270 of this Code applicable to the subject property.

Any such sum of 20% heretofore described may be increased to 30% by unroofed screening designed either to obscure the features listed under (A) and (B) below or to provide a more balanced and graceful silhouette for the top of the building or structure.

- (A) Mechanical equipment and appurtenances necessary to the operation or maintenance of the building or structure itself, including chimneys, ventilators, plumbing vent stacks, cooling towers, water tanks, panels or devices for the collection of solar or wind energy, and window-washing equipment, together with visual screening for any such features. This exemption shall be limited to the top 10 feet of such features where the height limit is 65 feet or less, and the top 16 feet of such features where the height limit is more than 65 feet.
- (B) Elevator, stair and mechanical penthouses, fire towers, skylights and dormer windows. This exemption shall be limited to the top 10 feet of

such features where the height limit is 65 feet or less, and the top 16 feet of such features where the height limit is more than 65 feet. However, for elevator penthouses, the exemption shall be limited to the top 16 feet and limited to the footprint of the elevator shaft, regardless of the height limit of the building. The design of all elevator penthouses in Residential Districts shall be consistent with the "Residential Design Guidelines" as adopted and periodically amended for specific areas or conditions by the City Planning Commission.

The Zoning Administrator may, after conducting a public hearing, grant a further height exemption for an elevator penthouse for a building with a height limit of more than 65 feet but only to the extent that the Zoning Administrator determines that such an exemption is required to meet state or federal laws or regulations. All requests for height exemptions for elevator penthouses located in Residential or Neighborhood Commercial Districts shall be subject to the neighborhood notification requirements of Sections 311 and 312 of this Code.

- (C) Stage and scenery lofts.
- (D) Ornamental and symbolic features of public and religious buildings and structures, including towers, spires, cupolas, belfries and domes, where such features are not used for human occupancy.
- (E) In any C-3 District, enclosed space related to the recreational use of the roof, not to exceed 16 feet in height.
- (F) Rooftop enclosures and screening for features listed in subsections (b)(1)(A) and (B) above that add additional building volume in any C-3 District except as otherwise allowed in the S-2 Bulk district according to subsection (M) below, Eastern Neighborhoods Mixed Use Districts, or South of Market Mixed Use District. The rooftop enclosure or screen creating the added volume:
 - (i) shall not be subject to the percentage coverage limitations otherwise applicable to this Section 260(b) but shall meet the requirements of Section 141;
 - (ii) shall not exceed 20 feet in height, measured as provided in

subsection (a) above;

- (iii) may have a volume, measured in cubic feet, not to exceed three-fourths of the horizontal area of all upper tower roof areas multiplied by the maximum permitted height of the enclosure or screen;
- (iv) shall not be permitted within the setbacks required by Sections 132.1, 132.2, and 132.3;
- (v) shall not be permitted within any setback required to meet the sun access plane requirements of Section 146; and
- (vi) shall not be permitted within any setback required by Section 261.1.
- (G) In any C-3 District except as otherwise allowed in the S-2 Bulk district according to subsection (M) below, vertical extensions to buildings, such as spires, which enhance the visual appearance of the structure and are not used for human occupancy may be allowed, pursuant to the provisions of Section 309, up to 75 feet above the height otherwise allowed. The extension shall not be subject to the percentage coverage limitations otherwise applicable to this subsection, provided that the extension is less than 100 square feet in cross-section and 18 feet in diagonal dimension.
- (H) In the Rincon Hill Downtown Residential District, enclosed space related to the recreational use of the roof, not to exceed 16 feet in height.
- (I) In the Rincon Hill Downtown Residential District, additional building volume used to enclose or screen from view the features listed under Subsections (b)(1)(A) and (b)(1)(B) above. The rooftop form created by the added volume shall not be subject to the percentage coverage limitations otherwise applicable to this subsection but shall meet the requirements of Section 141, shall not exceed 10 percent of the total height of any building taller than 105 feet, shall have a horizontal area not more than 85 percent of the total area of the highest occupied floor, and shall contain no space for human occupancy. The features described in (b)(1)(B) shall not be limited to 16 feet for buildings taller than 160 feet, but shall be limited by the permissible height of any additional rooftop volume allowed by this Subsection.

- (J) In the Van Ness Special Use District, additional building volume used to enclose or screen from view the features listed under Subsections (b)(1)(A) and (b)(1)(B) above and to provide additional visual interest to the roof of the structure. The rooftop form created by the added volume shall not be subject to the percentage coverage limitations otherwise applicable to this Subsection, but shall meet the requirements of Section 141 and shall not exceed 10 feet in height where the height limit is 65 feet or less or 16 feet where the height limit is more than 65 feet, measured as provided in Subsection (a) above, and may not exceed a total volume, including the volume of the features being enclosed, equal to 3/4 of the horizontal area of all upper tower roof areas of the building measured before the addition of any exempt features times 10 where the height limit is 65 feet or less or times 16 where the height limit is more than 65 feet.
- (K) In the Northeast China Basin Special Use District, light standards for the purpose of lighting the ballpark.
- (L) In the C-3-G District, on sites fronting on Van Ness Avenue in the 120-X height district, additional building volume used to enclose or screen from view the features listed under subsections (b)(1)(A) and (b) (1)(B) above, to allow increased roof height for performance and common space, and to provide additional visual interest to the roof of the structure. The rooftop form created by the added volume shall not be subject to the percentage coverage limitations otherwise applicable to this subsection (b) (1)(L), but shall meet the requirements of Section 141 and shall not exceed 16 feet in height, measured as provided in subsection (a) above. Buildings that are eligible for this exemption are also eligible for exceptions to any quantitative standards set forth in Article 1.2 of this Code through Section 309 of this Code.
- (M) In any S-2 Bulk District for any building which exceeds 550 feet in height, unoccupied building features including mechanical and elevator penthouses, enclosed and unenclosed rooftop screening, and unenclosed architectural features not containing occupied space that extend above the height limit, only as permitted by the Planning Commission according to the procedures of Section 309 and meeting all of the following criteria:

- (i) such elements are demonstrated to not add more than insignificant amounts of additional shadow compared to the same building without such additional elements on any public open spaces as deemed acceptable by the Planning Commission; and
- (ii) such elements are limited to a maximum additional height equivalent to 7.5 percent of the height of the building to the roof of the highest occupied floor, except that in the case of a building in the 1,000-foot height district such elements are not limited in height, and any building regardless of building height or height district may feature a single spire or flagpole with a diagonal in cross-section of less than 18 feet and up to 50 feet in height in addition to elements allowed according to this subsection (M); and
- (iii) such elements are designed as integral components of the building design, enhance both the overall silhouette of the building and the City skyline as viewed from distant public vantage points by producing an elegant and unique building top, and achieve overall design excellence.
- (2) The following features shall be exempt, without regard to their horizontal area, provided the limitations indicated for each are observed:
 - (A) Railings, parapets and catwalks, with a maximum height of four feet.
 - (B) Open railings, catwalks and fire escapes required by law, wherever situated.
 - (C) Unroofed recreation facilities with open fencing, including tennis and basketball courts at roof level, swimming pools with a maximum height of four feet and play equipment with a maximum height of 10 feet.
 - (D) Unenclosed seating areas limited to tables, chairs and benches, and related windscreens, lattices and sunshades with a maximum height of 10 feet.
 - (E) Landscaping, with a maximum height of four feet for all features other than plant materials.

- (F) Short-term parking of passenger automobiles, without additional structures or equipment other than trellises or similar overhead screening for such automobiles with a maximum height of eight feet.
- (G) Amusement parks, carnivals and circuses, where otherwise permitted as temporary uses.
- (H) Flagpoles and flags, clothes poles and clotheslines, and weathervanes.
- (I) Wireless Telecommunications Services Facilities and other antennas, dishes, and towers and related screening elements, subject to any other applicable Planning Code provisions, including but not limited to applicable design review criteria and Planning Code Section 295.
- (J) Warning and navigation signals and beacons, light standards and similar devices, not including any sign regulated by this Code.
 - (K) Public monuments owned by government agencies.
- (L) Cranes, scaffolding and batch plants erected temporarily at active construction sites.
- (M) Structures and equipment necessary for the operation of industrial plants, transportation facilities, public utilities and government installations, where otherwise permitted by this Code and where such structures and equipment do not contain separate floors, not including towers and antennae for transmission, reception, or relay of radio, television, or other electronic signals where permitted as principal or conditional uses by this Code.
- (N) Buildings, structures and equipment of the San Francisco Port Commission, where not subject to this Code due to provisions of the San Francisco Charter or State law.
- (O) Additional building height, up to a height of five feet above the otherwise applicable height limit, where the uppermost floor of the building is to be occupied solely by live/work units located within a South of Market District.
 - (P) Enclosed recreational facilities up to a height of 10 feet above

the otherwise applicable height limit when located within a 65-U Height and Bulk District and either an MUO or SSO District, and only then when authorized by the Planning Commission as a Conditional Use pursuant to Section 303 of this Code, provided that the project is designed in such a way as to reduce the apparent mass of the structure above a base 50 foot building height.

- (Q) Historic Signs and Vintage Signs permitted pursuant to Article 6 of this Code.
- (R) In the Eastern Neighborhoods Mixed Use Districts, enclosed utility sheds of not more than 100 square feet, exclusively for the storage of landscaping and gardening equipment for adjacent rooftop landscaping, with a maximum height of 8 feet above the otherwise applicable height limit.
- (S) Hospitals, as defined in this Code, that are legal non-complying structures with regard to height, may add additional mechanical equipment so long as the new mechanical equipment 1) is not higher than the highest point of the existing rooftop enclosure, excluding antennas; 2) has minimal visual impact and maximum architectural integration; 3) is necessary for the function of the building; and 4) no other feasible alternatives exist. Any existing rooftop equipment that is out of service or otherwise abandoned must be removed prior to installation of new rooftop equipment.

SECTION 602. SIGN DEFINITIONS

The following definitions shall apply to this Article 6, in addition to such definitions elsewhere in this Code as may be appropriate.

Area (of a Sign).

- (a) All Signs Except on Windows, Awnings and Marquees. The entire area within a single continuous rectangular perimeter formed by extending lines around the extreme limits of writing, representation, emblem, or any figure of similar character, including any frame or other material or color forming an integral part of the display or used to differentiate such Sign from the background against which it is placed; excluding the necessary supports or uprights on which such Sign is placed but including any Sign Tower. Where a Sign has two or more faces, the area of all faces shall be included in determining the Area of the Sign, except that where two such faces are placed back to back and are at no point more than two feet from one another, the Area of the Sign shall be taken as the area of one face if the two faces are of equal area, or as the area of the larger face if the two faces are of unequal area.
- (b) On Windows. The Area of any Sign painted directly on a window shall be the area within a rectangular perimeter formed by extending lines around the extreme limits of writing, representation, or any figure of similar character depicted on the surface of the window. The Area of any Sign placed on or behind the window glass shall be as described above in subsection (a).
- (c) On Awnings or Marquees. The Area of any Sign on an Awning or Marquee shall be the total of all signage on all faces of the structure. All sign copy on each face shall be computed within one rectangular perimeter formed by extending lines around the extreme limits of writing, representation, or any figure of similar character depicted on the surface of the face of the awning or marquee.

Attached to a Building. Supported, in whole or in part, by a building.

Business Sign. A Sign which directs attention to the primary business, commodity, service, industry or other activity which is sold, offered, or conducted on the premises upon which such Sign is located, or to which it is affixed. Where a number of businesses, services, industries, or other activities are conducted on the premises, or a number of commodities, services, or other activities with different brand names or

symbols are sold on the premises, up to one-third of the area of a Business Sign, or 25 square feet of Sign area, whichever is the lesser, may be devoted to the advertising of one or more of those businesses, commodities, services, industries, or other activities by brand name or symbol as an accessory function of the Business Sign, provided that such advertising is integrated with the remainder of the Business Sign, and provided also that any limits which may be imposed by this Code on the area of individual Signs and the area of all Signs on the property are not exceeded. The primary business, commodity, service, industry, or other activity on the premises shall mean the use which occupies the greatest area on the premises upon which the Business Sign is located, or to which it is affixed.

Directly Illuminated Sign. A Sign designed to give forth artificial light directly (or through transparent or translucent material) from a source of light within such Sign, including but not limited to neon and exposed lamp signs.

Freestanding. In no part supported by a building.

Freeway. A highway, in respect to which the owners of abutting lands have no right or easement of access to or from their abutting lands or in respect to which such owners have only limited or restricted right or easement of access, the precise route for which has been determined and designated as a Freeway by an authorized agency of the State or a political subdivision thereof. The term shall include the main traveled portion of the trafficway and all ramps and appurtenant land and structures. Trans-Bay highway crossings shall be deemed to be Freeways within the meaning of this definition for purposes of this Code.

General Advertising Sign. A Sign, legally erected prior to the effective date of Section 611 of this Code, which directs attention to a business, commodity, industry or other activity which is sold, offered or conducted elsewhere than on the premises upon which the Sign is located, or to which it is affixed, and which is sold, offered or conducted on such premises only incidentally if at all.

Height (of a Sign). The vertical distance from the uppermost point used in measuring the Area of a Sign, as defined in this Section 602, to the ground immediately below such point or to the level of the upper surface of the nearest curb of a Street, Alley or highway (other than a structurally elevated roadway), whichever measurement permits the greater

elevation of the Sign.

Historic Movie Theater Projecting Sign. A projecting Business Sign attached to a Qualified Movie Theater, as defined in Section 188(e)(1), when such sign was originally constructed in association with the Qualified Movie Theater or similar historic use. Such Signs are typically characterized by (a) perpendicularity to the primary facade of the building, (b) fixed display of the name of the establishment, often in large lettering descending vertically throughout the length of the Sign; (c) a narrow width that extends for a majority of the vertical distance of a building's facade, typically terminating at or slightly above the Roofline, and (d) an overall scale and nature such that the Sign comprises a significant and character defining architectural feature of the building to which it is attached. Elimination or change of any lettering or other inscription from a Historic Movie Theater Projecting Sign, such as that which may occur with a change of ownership, change of use, or closure does not preclude classification of the Sign under this Section. For specific controls on the preservation, rehabilitation, or restoration of these signs, refer to Section 188(e) of this Code.

Historic Movie Theater Marquee. A Marquee, as defined in Section 102, attached to a Qualified Movie Theater, as defined in Section 188(e)(1), when such Marquee was originally constructed in association with a Movie Theater or similar historic use. Elimination or change of any lettering or other inscription from a Historic Movie Theater Marquee, such as that which may occur with a change of ownership, change of use or closure, does not preclude classification of the Marquee under this Section. For specific controls on the preservation, rehabilitation, or restoration of these Signs, refer to Section 188(e) of this Code.

Historic Sign. An Historic Sign is any Sign identified on its own or as one of the character defining features of a property listed or eligible for the National Register of Historic Places or the California Register of Historical Resource, or designated in any manner under Articles 10 or 11 of the Planning Code.

Identifying Sign. A Sign for a use listed in Article 2 of this Code as either a principal or a conditional use permitted in an R District, regardless of the district in which the use itself may be located, which Sign serves to tell only the name, address, and lawful use of the premises upon which the Sign is located, or to which it is affixed. With respect

to shopping malls containing five or more stores or establishments in NC Districts, and shopping centers containing five or more stores or establishments in NC-S Districts or in the City Center Special Sign District, Identifying Signs shall include Signs which tell the name of and/or describe aspects of the operation of the mall or center. Shopping malls, as that term is used in this Section, are characterized by a common pedestrian passageway which provides access to the businesses located therein.

Indirectly Illuminated Sign. A Sign illuminated with a light directed primarily toward such Sign and so shielded that no direct rays from the light are visible elsewhere than on the lot where said illumination occurs. If not effectively so shielded, such sign shall be deemed to be a Directly Illuminated Sign.

Landscaped Freeway. Any part of a Freeway that is now or hereafter classified by the State or a political subdivision thereof as a Landscaped Freeway, as defined in the California Outdoor Advertising Act. Any part of a Freeway that is not so designated shall be deemed a nonlandscaped Freeway.

Nameplate. A sign affixed flat against a wall of a building and serving to designate only the name or the name and professional occupation of a person or persons residing in or occupying space in such building.

Nonilluminated Sign. A Sign which is not illuminated, either directly or indirectly.

Projection. The horizontal distance by which the furthermost point used in measuring the Area of a Sign, as defined in this Section 602, extends beyond a Street Property Line or a building setback line. A Sign placed flat against a wall of a building parallel to a Street or Alley shall not be deemed to project for purposes of this definition. A Sign on an Awning, Canopy or Marquee shall be deemed to project to the extent that such Sign extends beyond a Street Property Line or a building setback line.

Roofline. The upper edge of any building wall or parapet, exclusive of any Sign Tower.

Roof Sign. A Sign or any portion thereof erected or painted on or over the roof covering any portion of a building, and either supported on the roof or on an independent structural frame or Sign Tower, or located on the side or roof of a penthouse, roof tank, roof shed, elevator housing or other roof structure.

Sale or Lease Sign. A Sign which serves only to indicate with pertinent information the availability for sale, lease or rental of the lot or building on which it is placed, or some part thereof.

Sign. Any structure, part thereof, or device or inscription which is located upon, attached to, or painted, projected or represented on any land or right-of-way, or on the outside of any building or structure including an Awning, Canopy, Marquee or similar appendage, or affixed to the glass on the outside or inside of a window so as to be seen from the outside of the building, and which displays or includes any numeral, letter, word, model, banner, emblem, insignia, symbol, device, light, trademark, or other representation used as, or in the nature of, an announcement, advertisement, attention-arrester, direction, warning, or designation by or of any person, firm, group, organization, place, commodity, product, service, business, profession, enterprise or industry.

A "Sign" is composed of those elements included in the Area of the Sign as defined in this Section 602, and in addition the supports, uprights and framework of the display. Except in the case of General Advertising Signs, two or more faces shall be deemed to be a single Sign if such faces are contiguous on the same plane, or are placed back to back to form a single structure and are at no point more than two feet from one another. Also, on Awnings or Marquees, two or more faces shall be deemed to be a single Sign if such faces are on the same Awning or Marquee structure.

Sign Tower. A tower, whether attached to a building, Freestanding, or an integral part of a building, which is erected for the primary purpose of incorporating a Sign, or having a Sign attached thereto.

Street Property Line. For purposes of this Article 6 only, "street property line" shall mean any line separating private property from either a Street or an Alley.

Video Sign. A Sign that displays, emits, or projects or is readily capable of displaying, emitting or projecting a visual representation or image; an animated video, visual representation, or image; or other video image of any kind onto a building, fabric, screen, sidewalk, wall, or other surface through a variety of means, including, but not limited to: camera; computer; digital cinema, imaging, or video; electronic display; fiber optics; film; internet; intranet; light emitting diode screen or video display; microprocessor or microcontrolled based systems; picture frames; plasma display; projector; satellite;

scrolling display; streaming video; telephony; television; VHS; wireless transmission; or other technology that can transmit animated or video images.

Vintage Sign. A Sign that depicts a land use, a business activity, a public activity, a social activity or historical figure or an activity or use that recalls the City's historic past, as further defined in Section 608.14 of this Code, and as permitted by Sections 303 and 608.14 of this Code.

Wall Sign. A Sign painted directly on the wall or placed flat against a building wall with its copy parallel to the wall to which it is attached and not protruding more than the thickness of the sign cabinet.

Wind Sign. Any Sign composed of one or more banners, flags, or other objects, mounted serially and fastened in such a manner as to move upon being subjected to pressure by wind or breeze.

Window Sign. A Sign painted directly on the surface of a window glass or placed behind the surface of a window glass.

APPENDICES

[This page intentionally left blank.]

